


1. Features

AI Guidance¹⁾

- Failure Cable Section Pinpointing
 - AI Analyzes the Copper TDR measurement results and Pinpoints the Failure Cable Sections with Intuitive User Interface
 - AI also Suggests the Cause of Failure at each Failure Section

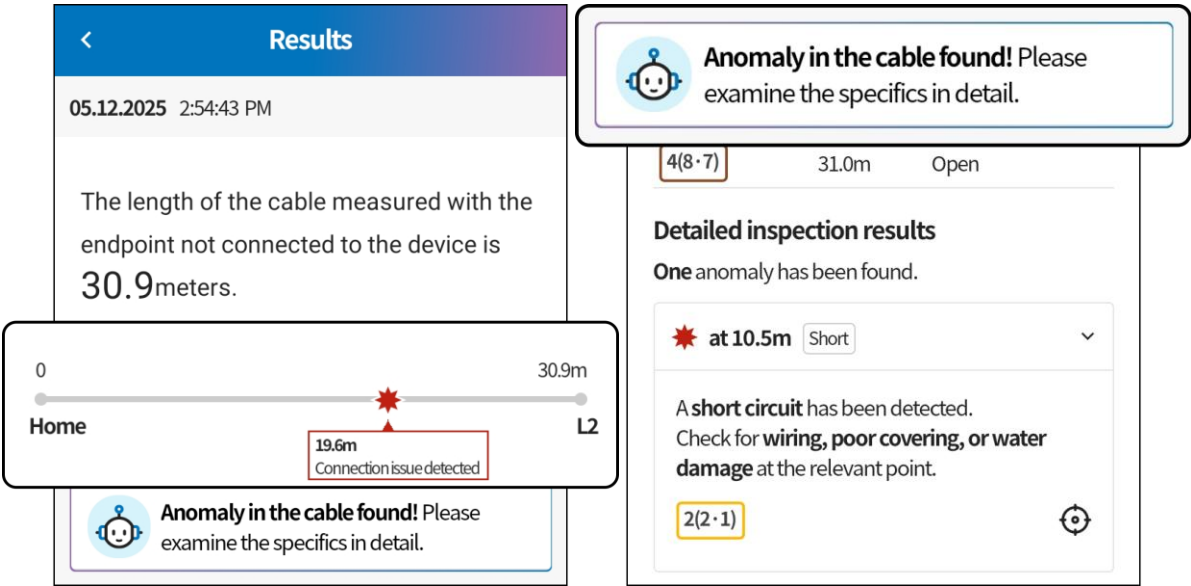

• Failure Detection Cases

Water Ingress	Corrosion	Loose Contact	Pinching	Jacket Damage

Test Features

Copper TDR

- (1) Supporting Cable Types
 - Supports all types of copper cables
 - Ethernet Cable : Plug-in the cable's RJ-45 jack directly into the RJ-45 connector of the device
 - Other Cables : Use the included Connector Block
- (2) TDR Measurement
 - Concurrent 4-Pair Measurement
 - Measurable Length : 10~150meters (Error : Within ±4%)
 - Resolution : 3cm
 - Supports Active State Measurement²⁾

1) Available from Pro Plan
2) Supports measuring if the cable's other end is connected to the power-on devices (e.g., L2, CPE Devices)

2. Device Specifications

General	
Model Name	NLNM-C
Components	Device(C1), Connector Block, Silicon Cover, Hand Strap, USB C-C Cable for Smartphone connection
Country of Origin	Korea, Republic of
Interface	
Cable Connection	1 x RJ-45 Port
Status Indication	1 x Status LED (Power On, Testing)
Others	1 x USB Type-C Port for Smartphone Connection
Mechanical	
Size & Weight	Device : W56 x D85 x H27 mm / 67g Package : W175 x D115 x H50 mm / 240g
Appearance	
Electrical	
Input Power	• Use USB Type-C Cable for Power Supply • Supply Power Requirements : 5Vdc ±10%, 300mAh
Environmental	
Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 60°C
Certifications	CE, FCC, KC, RoHS
Required Smartphone Spec.	
Android-based, OTG supported & USB-Type C Port	

3. Plan Comparison

	Basic	Pro	Team
	Free (Comes with the device)	Yearly Subscription (Per device)	Yearly Subscription (Per team)
AI Guidance		•	•
Test Features			
└ Cable Length Meas.	•	•	•
└ TDR Meas.	•	•	•
└ Test Results Retrieval	Up to recent 7 days	Unlimited	Unlimited
netCentral Features (Cloud-based Fleet Management Platform)			
└ (1) Fleet Test Data Collection			•
└ (4) Web-based Graphical Results Viewer			•

4. Device Warranty

Dead on Arrival (DOA)	If a delivered product is found to be dead on arrival (DOA), the customer should contact NEXTLab within five (5) days of receipt. NEXTLab will cover the cost of shipping for DOA products returned to NEXTLab facility. Upon confirmation of the DOA status, NEXTLab will provide a replacement product at no cost to the customer.
Free Repair for Manufacturing Defects	For a period of one (1) year after the date of receipt of the Products, if there are manufacturing defects, the Customer is eligible for free repair. NEXTLab will cover the shipping costs, but customs duties and other fees are the responsibility of the customer.
Exclusions from Warranty	NEXTLab will have no obligation to the extent that any failure of a Product to comply with the limited warranty results from or is otherwise attributable to: ① Negligence, misuse, or abuse of the Product ② Use of the Product other than in accordance with NEXTLab’s published specifications or user manual ③ Modifications, alterations, or repairs to the Product made by a party other than NEXTLab or a party authorized by NEXTLab ④ Any failure by the Customer or a third party to comply with environmental and storage requirements for the Product specified by NEXTLab, including, without limitation, temperature or humidity ranges ⑤ Use of the Product in combination with any third-party devices or products that have not been provided or recommended by NEXTLab
Non-Warranty Returns	If the product has no identifiable problem, NEXTLab reserves the right to charge for testing and return shipping costs.