



COMPANY PRESENTATION

PROTECTING OFFSHORE, SUBSEA AND ONSHORE ASSETS AND INFRASTRUCTURE SINCE 1977.

50 Years
IN BUSINESS

1,000+
PROJECTS

0 Claims
IN 50 YEARS

DNV
CERTIFIED

HOUSTON ANODES © · STRICTLY CONFIDENTIAL, FOR
RECIPIENT ONLY

2026 · 01 /
11





COMPANY OVERVIEW

WHO WE ARE

Houston Anodes designs and manufactures premium aluminum and zinc sacrificial anodes in Houston, Texas. In-house ISO 17025 laboratory. Electromagnetic induction melting. Custom configurations from 5 lbs to 1,650 lbs.

1,000+

PROJECTS

Completed in the past five years across five continents.

Zero

CLAIMS

Not a single product claim in 50 years of operation.

35+ Year


LIFE

Anodes made for the U.S. Navy with a proven 35-year service life.

Major

OPERATORS

Serving the world's top energy companies across five continents.

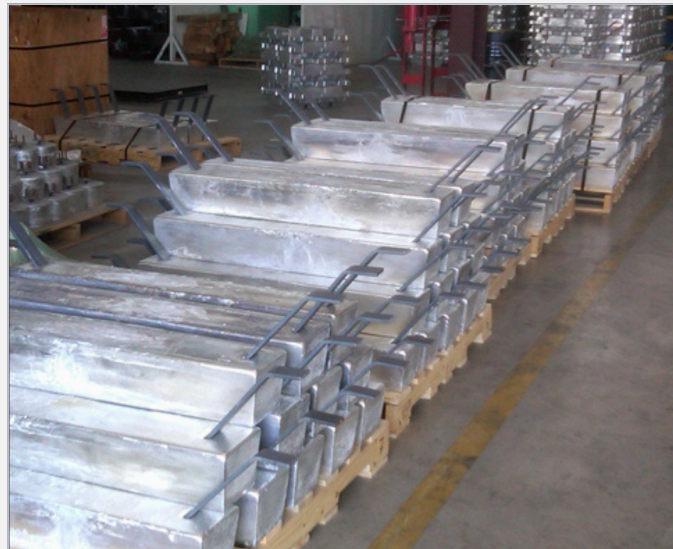



SAFETY FIRST

OUR #1 PRIORITY

Houston Anodes runs a zero-harm operation. Every process, every shift. HSE is not a program. It is how we operate. The successful management of HSE is an essential part of our business model and corporate culture.

EMPLOYEE DEVELOPMENT

Ongoing training and development programs for technical skills and safety awareness at every level.

SAFER PROCESS

Induction melting eliminates open-flame exposure and dangerous manual hand-stirring with steel rods.

ZERO HARM CULTURE

Every employee trained, every shift. Accident prevention as a job requirement, not a poster.





CORROSION NEVER SLEEPS

THE CHALLENGE

Metals extracted from their primary ore have a natural tendency to revert to that state under the action of oxygen and water. Corrosion is an electro-chemical process that threatens safety, production and the environment.

\$50B+

In annual global losses worldwide.

25%

Of structures fail prematurely.

60%

Gulf platforms past 20-year design life.

800 hrs

Average downtime per year.






CATHODIC PROTECTION

HOW IT WORKS

Cathodic protection works by connecting a sacrificial anode to the structure. DC current flows from the anode to the steel. The steel becomes cathodic and stops corroding. The anode is consumed instead.

- 01 The current results from the potential difference between two metals.
- 02 Causes a positive current to flow from the anode to the steel.
- 03 Surface of the steel becomes cathodic and does not corrode.
- 04 Requires sacrificial anodes and direct welding to the structure.

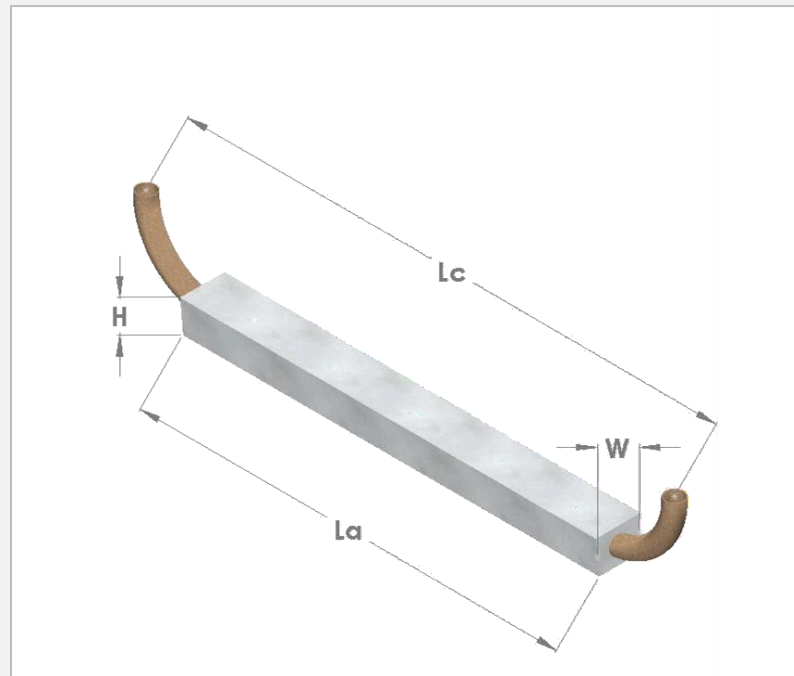



PREDICTABLE AND RELIABLE ASSET LIFE

WHAT WE DO

We design, manufacture, and deliver premium aluminum and zinc sacrificial anodes using electromagnetic induction technology, producing anodes that last 40% longer than conventional alternatives.

RIGHT SPECS

Electromagnetic induction melting, not gas furnaces.

- Proprietary aluminum alloys
- High-purity zinc
- Custom material formulations
- Any core configuration

RIGHT WEIGHT

Weight ranges from 5 lbs to custom configurations.

- Light-duty (22 – 99 lbs)
- Medium-duty (100 – 400 lbs)
- Heavy-duty (401 – 1,650 lbs)
- Custom weights

RIGHT FIT

Application-specific designs for any infrastructure.

- Platforms
- Subsea infrastructure
- Pipeline bracelets
- Pier / piling and more+



ANODE SPECIFICATIONS

ALUMINUM, ZINC, TITANIUM

AL ALUMINUM ALLOY

Galvalum III and Galvalum III DCW. Primary aluminum at 99.9% purity with traces of indium, zinc and silicon. Over three times the current capacity of zinc.

ELEMENT	GALVALUM III	III DCW
Iron (Fe)	0.09 max	0.06 max
Silicon (Si)	0.08 – 0.12	0.08 – 0.12
Copper (Cu)	0.006 max	0.003 max
Zinc (Zn)	2.0 – 6.0	4.75 – 5.25
Indium (In)	0.01 – 0.02	0.016 – 0.025
Aluminum (Al)	Remainder	Remainder

1,150 A-hr/lb seawater capacity @ 25°C

(-) 1.05 V closed circuit, Ag/AgCl

ZN ZINC ALLOY

Special High Grade zinc at 99.99% purity to MIL-A-18001-K. Preferred for deep, cold water and saline mud where temperature stays below 50°C (120°F).

ELEMENT	MIL-A-18001-K
Iron (Fe)	0.005 max
Lead (Pb)	0.006 max
Copper (Cu)	0.005 max
Cadmium (Cd)	0.025 – 0.07
Aluminum (Al)	0.1 – 0.5
Zinc (Zn)	Remainder

780 amp-hr/kg nominal current capacity

95% efficiency nominal, in seawater

TI TITANIUM ALLOY

Deep 7 and Deep 10. Engineered for aggressive, high-temperature and low-conductivity service; controlled titanium content stabilizes the microstructure for consistent activation.

ELEMENT	DEEP 7	DEEP 10
Iron (Fe)	0.07 max	0.10 max
Silicon (Si)	0.10 max	0.10 max
Copper (Cu)	0.003 max	0.006 max
Zinc (Zn)	4.75 – 5.25	3.00 – 6.00
Indium (In)	0.015 – 0.025	0.010 – 0.020
Titanium (Ti)	0.025 max	0.025 max

Chemistry verified on every heat

Values shown in % by weight




PRODUCT PORTFOLIO

WHAT WE DELIVER

PLATFORM ANODES

AL ZN TI

Offshore
Structural
Jacket



BRACELET ANODES

AL ZN TI


Pipeline
Subsea
Offshore



TRAPEZOIDAL ANODES

AL ZN TI


Infrastructure
Marine
Piling



BOWLING BALL ANODES

AL ZN TI


Tank
Internal protection
Industrial



DRUM ANODES

AL ZN TI

Tank
Vessel
Industrial



HEATER TREATER ANODES

AL ZN TI

Oil and gas
Production
Internal protection



SIX PRODUCT FAMILIES. ONE MANUFACTURER.



MARKETS AND APPLICATIONS

WHO WE SERVE



MARINE AND OFFSHORE

Oil rigs
Ship building
Port facilities
Offshore structures



PIPELINES

Underground pipelines
Subsea pipelines



STORAGE TANKS

Water storage tanks
Industrial vessels
Containment systems



WATER INFRASTRUCTURE

Municipal water systems
Cooling towers
Heat exchangers



POWER GENERATION

Power plants
Cooling systems
Electrical infrastructure



INDUSTRIAL FACILITIES

Chemical plants
Refineries
Manufacturing facilities



TRUSTED BY INDUSTRY LEADERS

PROVEN RESULTS

ExxonMobil



ISO 9001:2015

ISO 17025

DNV CERTIFIED

ØRSTED APPROVED

U.S. NAVY
APPROVED
SUPPLIER



GET IN TOUCH

SAFEGUARD YOUR INFRASTRUCTURE TODAY

E-MAIL

✉ anodes@houstonanodes.com

PHONE

☎ 832.243.0700

WEBSITE

🌐 houstonanodes.com

ADDRESS

6425 Cunningham Road
Houston, TX 77041

in LINKEDIN f FACEBOOK o INSTAGRAM X X

HOUSTON ANODES © · STRICTLY CONFIDENTIAL, FOR
RECIPIENT ONLY

2026 · 11 /
11

