



OFFSHORE AND SUBSEA SOLUTIONS

SINCE 1977. MADE IN THE USA.

MADE IN USA

BUILT FOR THE HARSHTEST ENVIRONMENTS ON EARTH

Houston Anodes has protected deepwater platforms, subsea structures, and offshore wind foundations since 1977. We design, manufacture, and deliver premium aluminum and zinc sacrificial anodes using electromagnetic induction technology, producing anodes that last up to 40% longer than conventional alternatives.

RIGHT SPECS

Proprietary alloys engineered for seawater performance.

- Low-iron, high purity aluminum
- NACE, DNV, Norsok compliant
- Zero porosity, perfect density
- 40% longer service life

RIGHT WEIGHT

Structural protection from 5 lbs to 1,250 lbs standard.

- Platform anodes
- Bracelet anodes
- Custom subsea
- Wind turbine foundations

RIGHT FIT

Configurations for new builds and retrofits.

- 90°, 45°, straight core platforms
- Square and tapered bracelets
- Weld-on and bolt-on
- Any geometry to exact spec

BUILT TO THE ENERGY'S HIGHEST STANDARDS

CERTIFIED AND APPROVED

ISO 9001:2015

ISO 17025

ORSTED
APPROVED

US NAVY
APPROVED

AND MORE+

ZERO PRODUCT FAILURES IN 50 YEARS

SINCE 1977

PREMIUM SACRIFICIAL ANODES FOR NEW CONSTRUCTION OR RETROFIT

PROVEN IN
THE FIELD

Delivered to ExxonMobil, Shell, BP, Chevron, PEMEX, TechnipFMC, Subsea 7, J. Ray McDermott, Ørsted, Oceaneering, and the U.S. Navy. Approved FMC Global Supplier, among others.

HOUSTON ANODES (INDUCTION FURNACE)


- 2 to 8 week lead time
- ISO 17025 tested every batch
- 100% homogeneous alloy
- 100% made in the USA
- Any geometry

ANODES IMPORTS

- × 4 to 8 months lead time
- × Freight and tariff exposure
- × Batch inconsistencies
- × Variable alloy quality
- × Limited custom geometry

PLATFORM ANODES

AL ZN TI

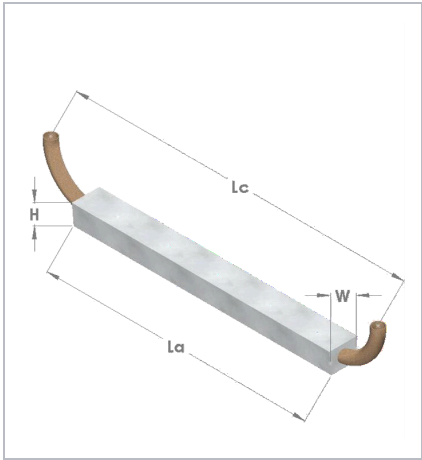

90° / 45° OFFSHORE
STRUCTURAL JACKET

BRACELET ANODES


AL ZN TI



10" - 30" OFFSHORE
SUBSEA PIPELINE

TRAPEZOIDAL ANODES

AL ZN TI

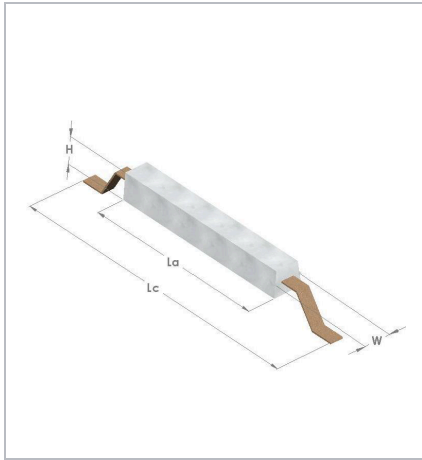

PIERS PILINGS
INFRASTRUCTURE MARINE

WHERE THEY GO TO WORK

APPLICATIONS

DEEPWATER
PLATFORMS

SUBSEA PIPELINES

U.S. NAVY

OFFSHORE WIND

AND MORE+

PREMIUM ANODE SPECIFICATIONS

PLATFORM, BRACELET AND TRAPEZOIDAL ANODES

Standard sizes shown. Any weight, size, shape and configuration required by the customer can be manufactured. Weight based on aluminum alloy; also available in zinc alloy. When ordering, please specify metal and chemical composition.

PLATFORM ANODES — 90° CORE TYPE A

SELECTED STANDARD SIZES

NAME	LA (IN)	LC (IN)	W (IN)	H (IN)	NET (LBS)	GROSS (LBS)	CORE TYPE
PF_180_AC90	60	93	6 ½	5 ½	180	225	2" SCH. 80
PF_325_AC90	60	93	8 ¼	7 ¾	325	409	3" SCH. 80
PF_407_AC90	72	105	8	8 ¼	407	520	3" SCH. 80
PF_725_AC90	95	128	9 ¾	9 ¾	725	905	4" SCH. 80
PF_1100_AC90	122	155	10 ½	10	1,100	1,316	4" SCH. 80
PF_1250_AC90	144	165	10	10 ½	1,250	1,455	4" SCH. 80
PF_1765_AC90	117	150	12	15	1,765	—	4" SCH. 80

BRACELET ANODES — SQUARE WELD-ON

SELECTED STANDARD SIZES

NAME	Ø (IN)	L (IN)	G (IN)	T (IN)	NET (LBS)	GROSS (LBS)	CORE TYPE
BR4.5_24_WO	4 ½	10 ½	1 ¼	1 ½	24	27	3/16 x 1
BR8_73_WO	8	13 ¾	2	1 ½	73	82	3/16 x 1 ½
BR10.5_133_WO	10 ½	22 ½	1 ½	1 ¼	133	144	3/16 x 1 ½
BR13_143_WO	13	17	2	2	143	157	¼ x 2
BR16_231_WO	16	25 ½	1 ½	2 ½	231	247	¼ x 2

TRAPEZOIDAL ANODES — FLUSH CORE

PIERS, PILINGS AND BALLAST

NAME	LC (IN)	W (IN)	H (IN)	NET (LBS)	GROSS (LBS)
TR_5.7_FC	30	1 ½	1	5.7	7.8
TR_10.5_FC	9	3 ¾	3 ¾	10.5	11.3
TR_16_FC	23	3	2 ½	16	18
TR_18_FC	48	2	2	18	21

ALLOYS AND CORES

- Low-iron, high purity primary aluminum
- Special high grade zinc, 99.99% purity
- 100% ASTM steel cores
- Never melt scrap or recycled material

TESTING AND DOCUMENTATION

- Chemical analysis performed on every heat
- Results verified against Mill Test Reports
- Electrochemical properties per DNV-RP-B401, NACE TM-0190
- ISO 17025 accredited laboratory

CUSTOM GEOMETRIES TO EXACT SPECIFICATION

CONTACT ENGINEERING

SAFEGUARD YOUR INFRASTRUCTURE TODAY

