



Houston

anodes

HEATER TREATERS AND VESSEL SOLUTIONS

SINCE 1977. MADE IN THE USA.

MADE IN USA

INTERNAL VESSEL PROTECTION ENGINEERED FOR THE HARSHTEST CONDITIONS

Houston Anodes manufactures premium aluminum and zinc sacrificial anodes purpose-built for internal vessel applications. Custom-cast to exact specifications for any tank bottom or vessel interior. Our induction-cast anodes last 40% longer than gas-furnace alternatives.

RIGHT SPECS

Induction-cast alloys. Zero porosity, perfect density.

- Aluminum alloys (99.9% purity)
- Zinc alloys (99.99% purity)
- 40% longer anode lifespan
- NACE, DNV, NORSOK compliant

RIGHT WEIGHT

Structural protection from 5 lbs to 1,250 lbs standard.

- Heater treater
- Heater treater eyebolt
- Bowling ball
- Drum

RIGHT FIT

Built for vessel interiors and tank bottoms.

- Red/blue caps and nuts on request
- Square $\frac{3}{4}$ " steel rod core standard
- Any core length to spec
- Custom geometries welcome

BUILT TO THE ENERGY'S HIGHEST STANDARDS

CERTIFIED AND APPROVED

ISO 9001:2015

ISO 17025

ORSTED
APPROVED

US NAVY
APPROVED

AND MORE+

ZERO PRODUCT FAILURES IN 50 YEARS

SINCE 1977

PROTECTING VESSELS FROM THE INSIDE OUT

THE DIFFERENCE IN SERVICE

Gas-furnace anodes leave up to 41% of their mass as passive material that never protects the vessel. Induction-cast anodes deplete completely. The difference shows up in replacement intervals and total cost of ownership.

HOUSTON ANODES (INDUCTION FURNACE)

- 0% passive material
- 100% indium activation
- Zero porosity, perfect density
- Predictable depletion rate
- 40% longer service intervals

GAS-FURNACE ANODES

- 41% passive material wasted
- Partial indium activation
- Porosity defects
- Unpredictable depletion
- Shorter replacement cycles

HEATER TREATER ANODES

AL

ZN

TI




HEATER TREATER EYEBOLT

AL

ZN

TI

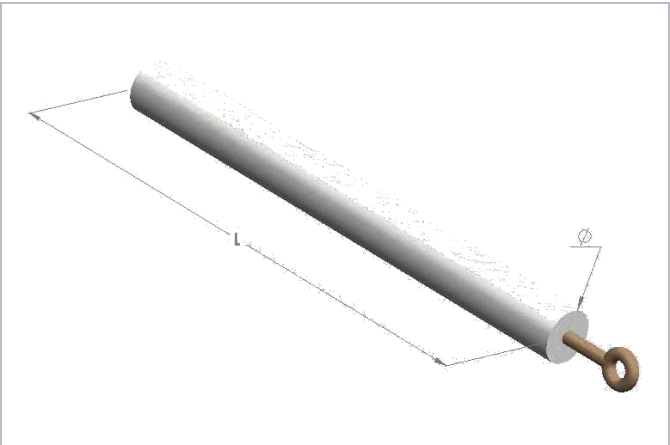


BOWLING BALL

AL

ZN

TI

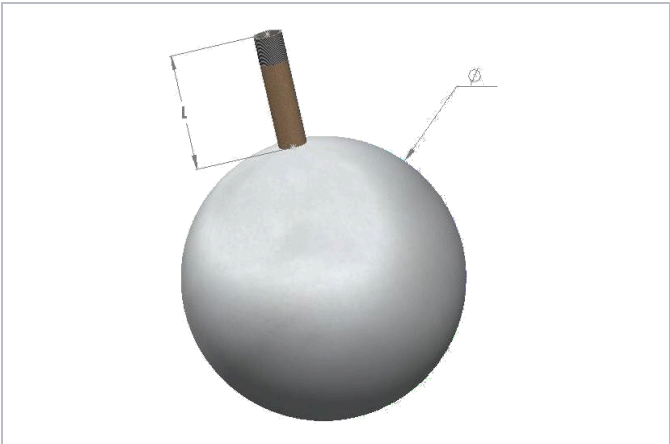


DRUM

AL

ZN

TI

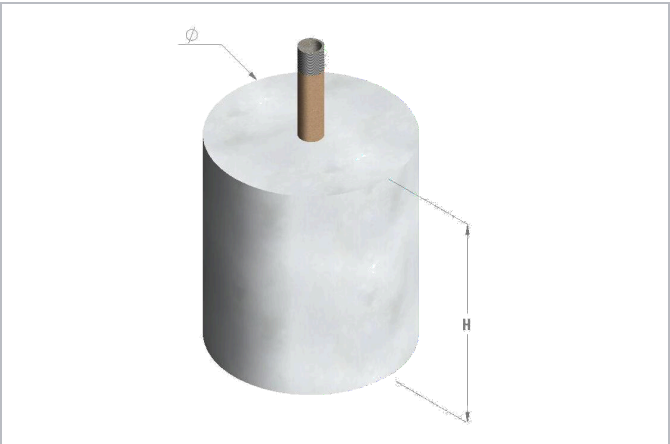

Standard sizes shown. Any weight, size, shape and configuration required by the customer can be manufactured. Weight based on aluminum alloy; also available in zinc alloy. When ordering, please specify metal and chemical composition.

HEATER TREATER

3/4" ROD CORE

NAME	LA (IN)	Ø (IN)	NET WEIGHT (LBS)	GROSS WEIGHT (LBS)	CORE TYPE
HT_18.5_1R	30	3	18.5	23	3/4" ROD
HT_27.75_1R	45	3	27.75	34	3/4" ROD
HT_37_1R	60	3	37	45	3/4" ROD

HEATER TREATER EYEBOLT

3/4" ROD CORE

NAME	LA (IN)	Ø (IN)	NET WEIGHT (LBS)	GROSS WEIGHT (LBS)	CORE TYPE
HT_18.5_1RR	30	3	18.5	23	3/4" ROD
HT_27.75_1RR	45	3	27.75	34	3/4" ROD
HT_37_1RR	60	3	37	45	3/4" ROD

BOWLING BALL

1" SCH. 80

DRUM

1" SCH. 80

NAME	LA (IN)	Ø (IN)	NET (LBS)	GROSS (LBS)	NAME	LA (IN)	Ø (IN)	NET (LBS)	GROSS (LBS)
BB_46	4	9.8	46	47	DR_45	9 1/4	8 1/4	45	46

ALLOYS AND CORES

- Primary aluminum, 99.9% purity
- Special high grade zinc, 99.99% purity
- 100% ASTM steel cores
- Never melt scrap or recycled material

TESTING AND DOCUMENTATION

- Chemical analysis performed on every heat
- Results verified against Mill Test Reports
- Electrochemical properties per DNV-RP-B401, NACE TM-0190
- ISO 17025 accredited laboratory

CUSTOM GEOMETRIES TO EXACT SPECIFICATION

CONTACT ENGINEERING