



ONSHORE INFRASTRUCTURE SOLUTIONS

SINCE 1977. MADE IN THE USA.

MADE IN USA

BUILT FOR THE HARSHTEST ENVIRONMENTS ON EARTH

Houston Anodes has protected deepwater platforms, subsea structures, and offshore wind foundations since 1977. We design, manufacture, and deliver premium aluminum and zinc sacrificial anodes using electromagnetic induction technology, producing anodes that last up to 40% longer than conventional alternatives.

RIGHT SPECS

In-house ISO 17025 lab. Every batch tested.

- Aluminum 99.9% purity
- Zinc 99.99% purity
- Never melt scrap or recycled material
- Chemical analysis on every heat

RIGHT WEIGHT

Standard and custom weights for onshore applications. From 5 lbs to 1,650 lbs.

- Light-duty (5 to 99 lbs)
- Medium-duty (100 to 400 lbs)
- Heavy-duty (401 to 1,650 lbs)
- Custom configurations available

RIGHT FIT

Built for refinery, chemical, and pipeline operations.

- Pier, piling, and ballast anodes
- Heater treater and tank anodes
- Pipeline bracelets (retrofit-ready)
- Custom clamp, mat, and link

BUILT TO THE ENERGY'S HIGHEST STANDARDS

CERTIFIED AND APPROVED

ISO 9001:2015

ISO 17025

ORSTED
APPROVED

US NAVY
APPROVED

AND MORE+

ZERO PRODUCT FAILURES IN 50 YEARS

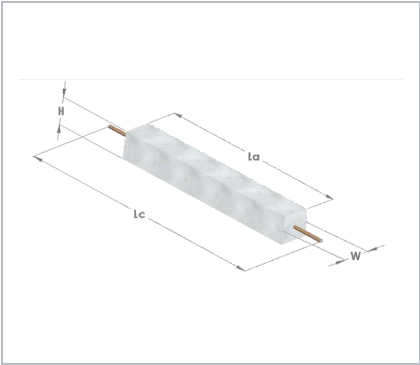
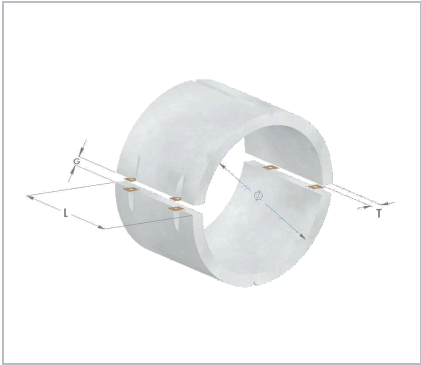
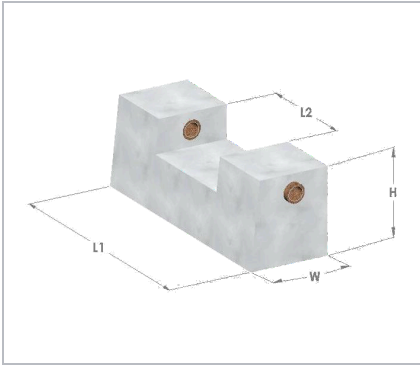
SINCE 1977

PREMIUM SACRIFICIAL ANODES FOR NEW CONSTRUCTION OR RETROFIT

PROVEN IN
THE FIELD

Delivered to ExxonMobil, Shell, BP, Chevron, PEMEX, TechnipFMC, Subsea 7, J. Ray McDermott, Ørsted, Oceaneering, and the U.S. Navy. Approved FMC Global Supplier, among others.

HOUSTON ANODES (INDUCTION FURNACE)	ANODES IMPORTS
2 to 8 week lead time - ISO 17025 tested every batch 100% homogeneous alloy 100% made in the USA - Retrofit-ready product line	4 to 8 months lead time - Freight and tariff exposure - Inconsistent chemistry - Variable alloy quality - Limited retrofit support

REFINERIES AND CHEMICALS	PIPELINES AND PIERS	CUSTOM AND SPECIAL
ALZNTI  Internal vessel protection for heater treaters, tanks, drums, and process equipment. Red/blue caps available on request.	ALZNTI  Trapezoidal flush core, stand-off (A & B) Rod core / Rod stand-off Bolt-on available for retrofit. Any core length to spec	ALZNTI  Clamp, mat, link, and any geometry required. In-house mold manufacturing means fast turnaround on specialty projects.

WHERE THEY GO TO WORK

APPLICATIONS

REFINERIES	CHEMICAL PLANTS	PIPELINES	TANKS AND VESSELS	HARBORS AND PIERS
------------	-----------------	-----------	-------------------	-------------------

Standard sizes shown. Any weight, size, shape and configuration required by the customer can be manufactured. Weight based on aluminum alloy; also available in zinc alloy. When ordering, please specify metal and chemical composition.

TRAPEZOIDAL ANODES — FLUSH CORE

PIERS, PILINGS AND BALLAST

NAME	LC (IN)	W (IN)	H (IN)	NET (LBS)	GROSS (LBS)
TR_5.7_FC	30	1 ½	1	5.7	7.8
TR_10.5_FC	9	3 ¾	3 ¾	10.5	11.3
TR_16_FC	23	3	2 ½	16	18
TR_18_FC	48	2	2	18	21

TRAPEZOIDAL ANODES — ROD STAND-OFF CORE

BOLT-ON AVAILABLE FOR RETROFIT

NAME	LA (IN)	LC (IN)	W (IN)	H (IN)	NET (LBS)	GROSS (LBS)
TR_174_RSO	48	62	10	3 ½	174	178
TR_182_RSO	72	86	4 ½	5 ½	182	186
TR_185_RSO	60 ½	74	5 ½	6	185	189
TR_195_RSO	61	75	5 ½	6	195	199

HEATER TREATER AND TANK ANODES

INTERNAL VESSEL PROTECTION

NAME	LA (IN)	Ø (IN)	NET (LBS)	GROSS (LBS)	CORE TYPE
HT_18.5_1R	30	3	18.5	23	¾" ROD
HT_37_1R	60	3	37	45	¾" ROD
BB_46	4	9.8	46	47	1" SCH. 80
DR_45	9 ¼	8 ¼	45	46	1" SCH. 80

CUSTOM — CLAMP, MAT AND LINK

IN-HOUSE MOLD MANUFACTURING

NAME	L (IN)	L2 (IN)	NET (LBS)	GROSS (LBS)	CORE TYPE
CL_16	11 ½	5	16	16	½" SCH. 80
SM_17	4 ½	7 3/8	17	18	—
RL_45.5	60	4 ½	45.5	50	¼" steel cable

ALLOYS AND CORES

- Low-iron, high purity primary aluminum
- Special high grade zinc, 99.99% purity
- 100% ASTM steel cores
- Never melt scrap or recycled material

TESTING AND DOCUMENTATION

- Chemical analysis performed on every heat
- Results verified against Mill Test Reports
- Electrochemical properties per DNV-RP-B401, NACE TM-0190
- ISO 17025 accredited laboratory

CUSTOM GEOMETRIES TO EXACT SPECIFICATION

CONTACT ENGINEERING