

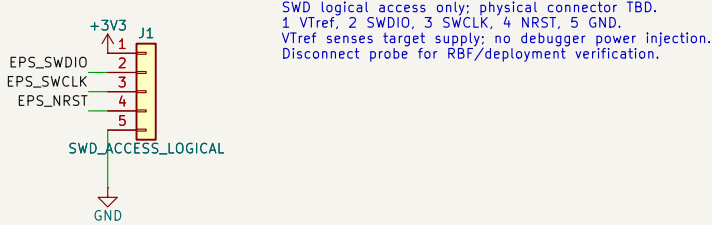


EPS CONTROLLER SUPPORT DRAFT
+3V3 here means essential 3.3 V downstream of hardware interlocks.
Passive values/packages are proposals; final MPNs and derating remain open.

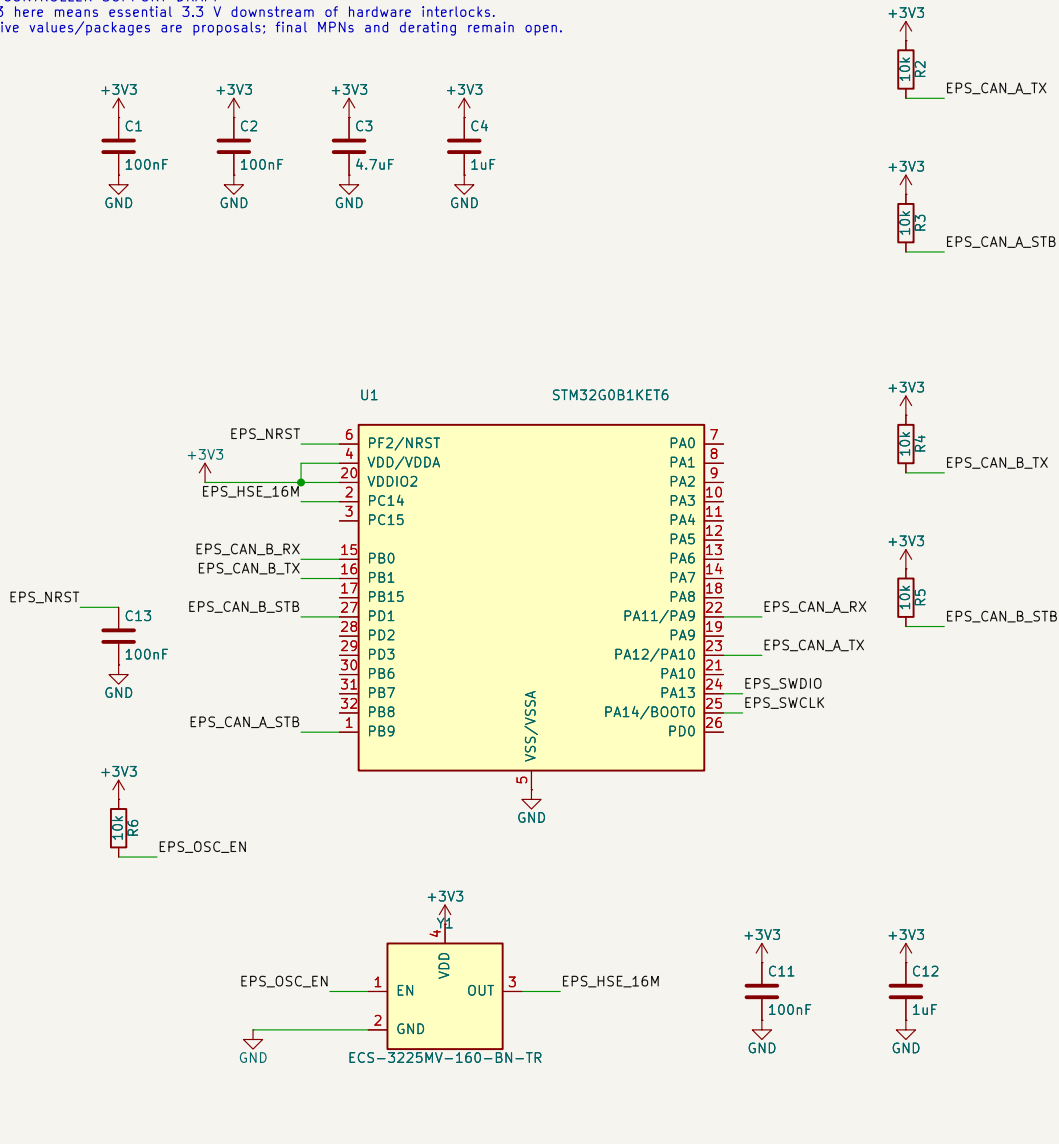

NRST: internal pull-up + C13; preserve reset I/O mode for SWD recovery.
PA14 remains SWCLK. Define boot option bytes before programming.
CAN TXD/STB pull-ups hold recessive/standby until firmware initialization.
Supply fault isolation, bus protection and regulator budget remain open.



CAN A logical stack subset: 1=H1.51, 2=H1.52.
R7 DNP unless EPS is the physical bus end.
TVS and optional filtering not yet implemented.



CAN B logical stack subset: 1=H2.49, 2=H2.50.
R8 DNP unless EPS is the physical bus end.
Separate bus; no A/B wire or TVS package sharing.