


EPS CONTROLLER SUPPORT DRAFT
+3V3 here means essential 3.3 V downstream of hardware interlocks.
Passive values/packages are proposals; final MPNs and derating remain open.
























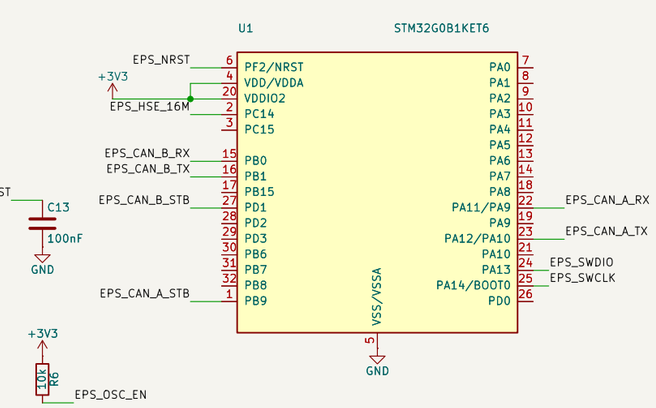

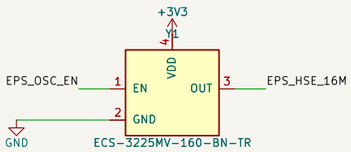





SWD logical access only: physical connector TBD.
1 VTref, 2 SWDIO, 3 SWCLK, 4 NRST, 5 GND.
VTref senses target supply: no debugger power injection.
Disconnect probe for RBF/deployment verification.

NRST: internal pull-up + C13: preserve reset I/O mode for SWD recovery.
PA14 remains SWCLK. Define boot option bytes before programming.
CAN TXD/STB pull-ups hold recessive/standby until firmware initialization.
Supply fault isolation, bus protection and regulator budget remain open.

Sheet: /
File: package_check.kicad_sch
Title:
Size: A3 | Date: | Rev:
KiCad E.D.A. 10.0.0 | Id: 1/1