LTC4162 charger candidate — UFD pin map

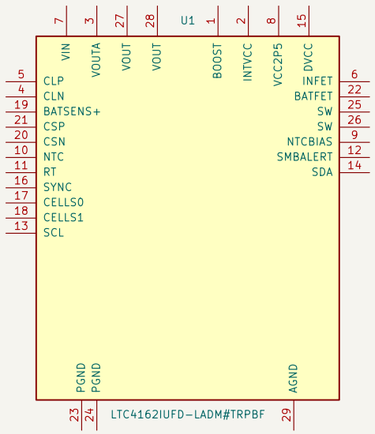

BQ40Z50-R2 candidate — RSM pin map

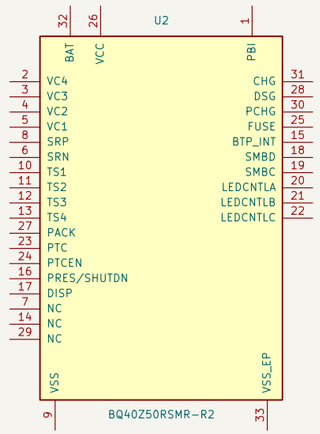

CUSTOM — REVIEW REQUIRED

Pin 1 = BOOST; EP29 = AGND
29 distinct electrical pins/pads; repeated power pins remain separate.

DISPOSABLE LIBRARY INSPECTION ONLY — not a circuit or accepted EPS stage.
All leads intentionally unwired for pin-map inspection. No source flags or ERC masking.
Physical-map validation does not qualify copper/stencil/thermal design or component application.

CUSTOM — REVIEW REQUIRED

Pin 1 = PBI; EP33 = VSS
NC7/14/29 are internally unconnected; TI permits VSS ties.

Sheet: /
File: charger_bms_check.kicad_sch

Title:

Size: B	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 1/1