

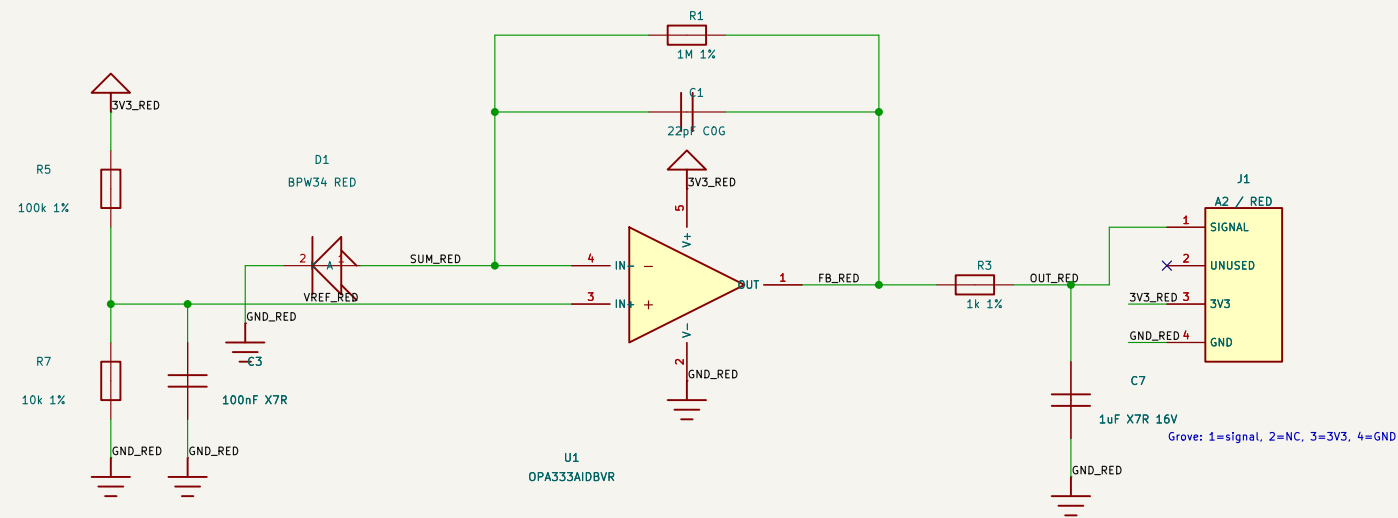



J3 -> ADS1115: each signal travels with its own channel ground

Power the ADS1115 separately. J3 does not provide VCC.



R3/R4 + C7/C8: 1k / 1uF output low-pass, $f_c = 159$ Hz.

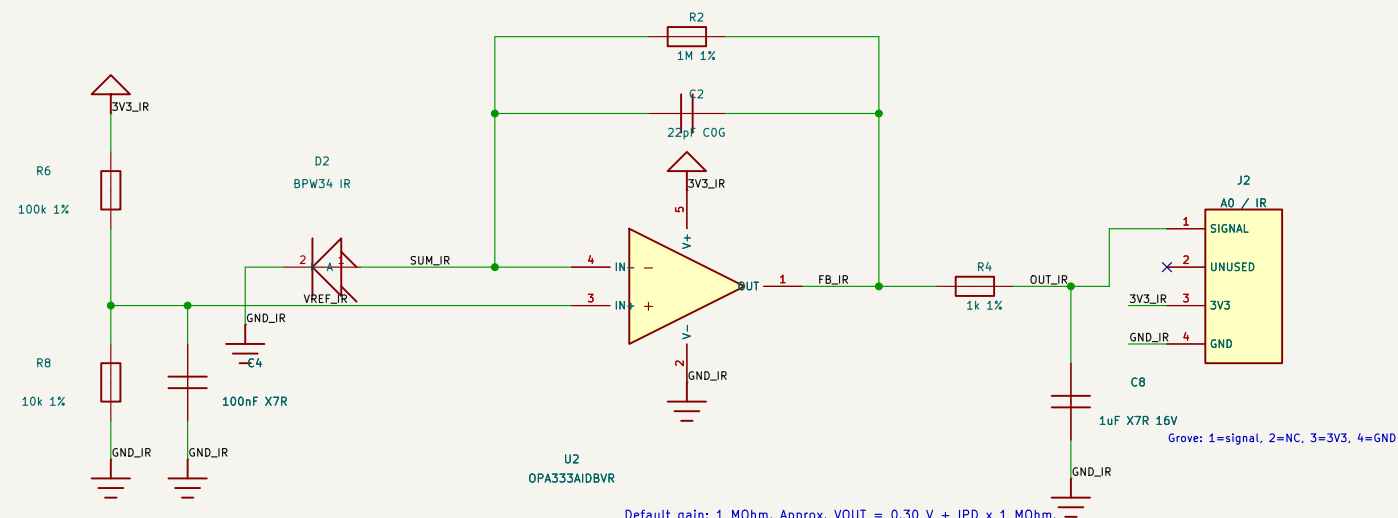

Default gain: 1 MOhm. Approx. $V_{OUT} = 0.30 \text{ V} + I_{PD} \times 1 \text{ MOhm}$.

C1/C2 = 22 pF COG stability capacitors; all 100 nF capacitors are non-polar ceramic.

OPA333 SOT-23-5 may be replaced by pin-compatible MCP6001T-1/OT for lower cost.

70 x 20 mm / Grove A2 RED + A0 IR / ADS1115 output
 Nguyen Nhat Huy – Pham Thanh Vy

Sheet: /
File: bpw34_receiver.kicad_sch

Title: DATN: PPG-Simulator – Dual BPW34 receiver

Size: A3	Date: 2026-10-02
----------	------------------

Rev: 1.4

Size: A3	
KiCad E.D.A. 10.0.6	

Id: 1/1