



Dual BPW34 receiver v1.4 - actual routed copper and pad numbers

Top copper / through-hole wiring

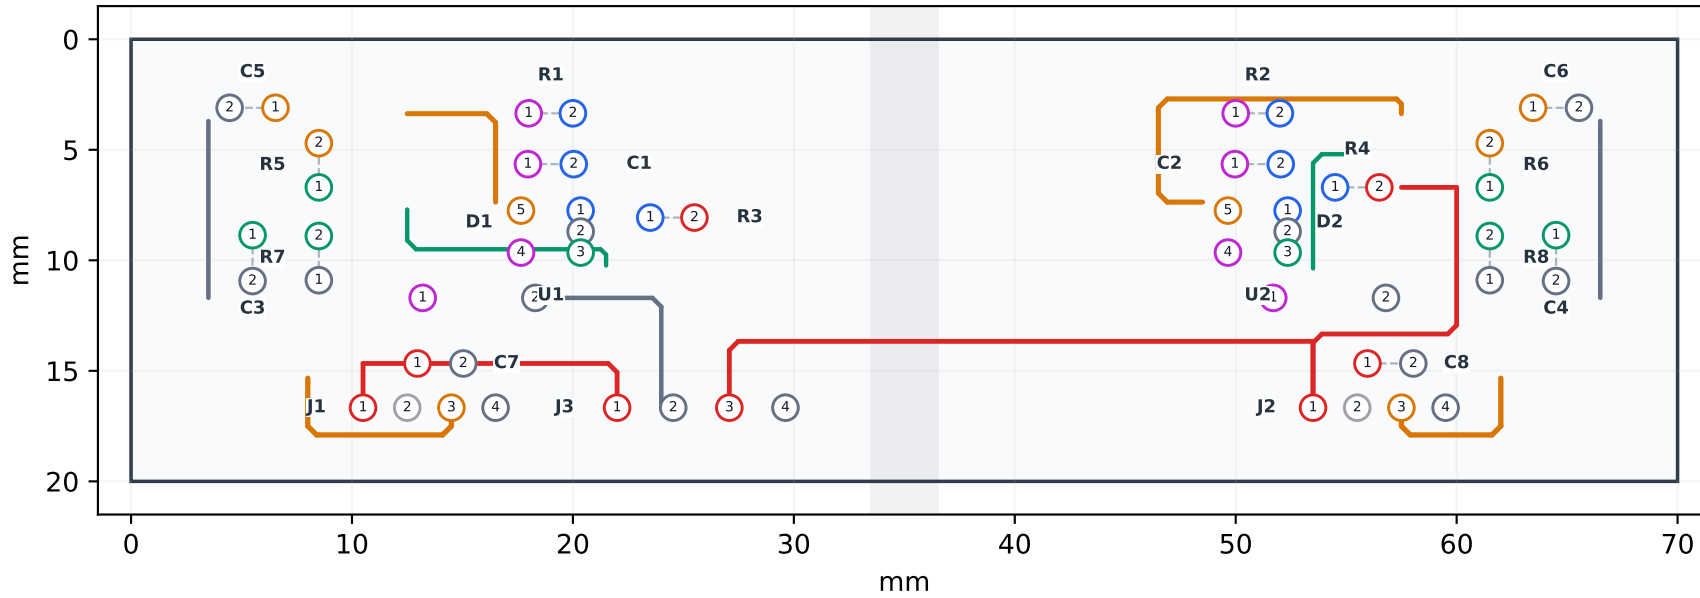

Rear analog layout / B.Cu viewed from top

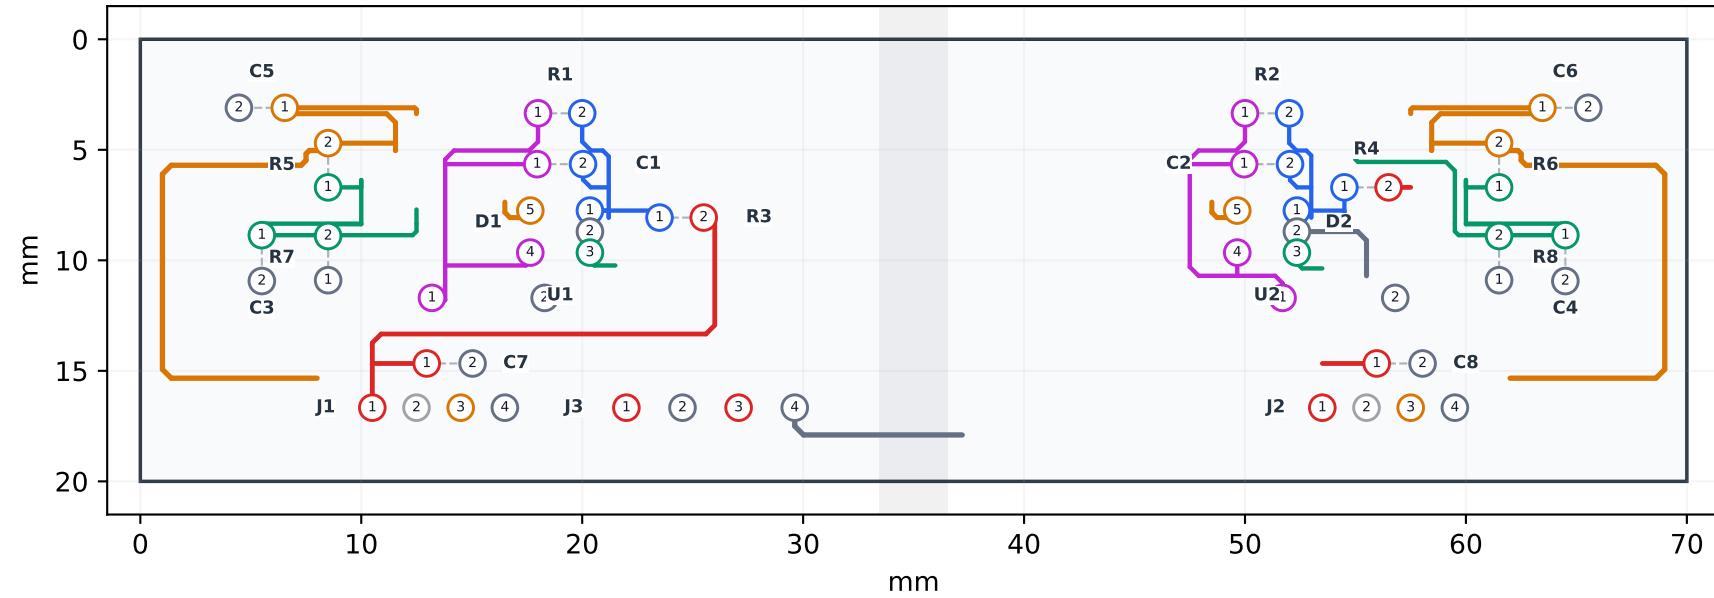

- 3.3 V
- channel ground
- photodiode summing node
- TIA feedback/output
- 0.30 V reference
- ADC output
- unused