


DUAL OPT101 RECEIVER: RED -> A2 / IR -> A0

3.3 V only. C1/C2: non-polar ceramic 100 nF, X7R, 50 V.

Separate supply/return cables meet at the HAT. J3 has signals only: ADS must share HAT GND.

Crossings without dots are NOT connected. Pins 2, 6, 7 of OPT101 remain open.

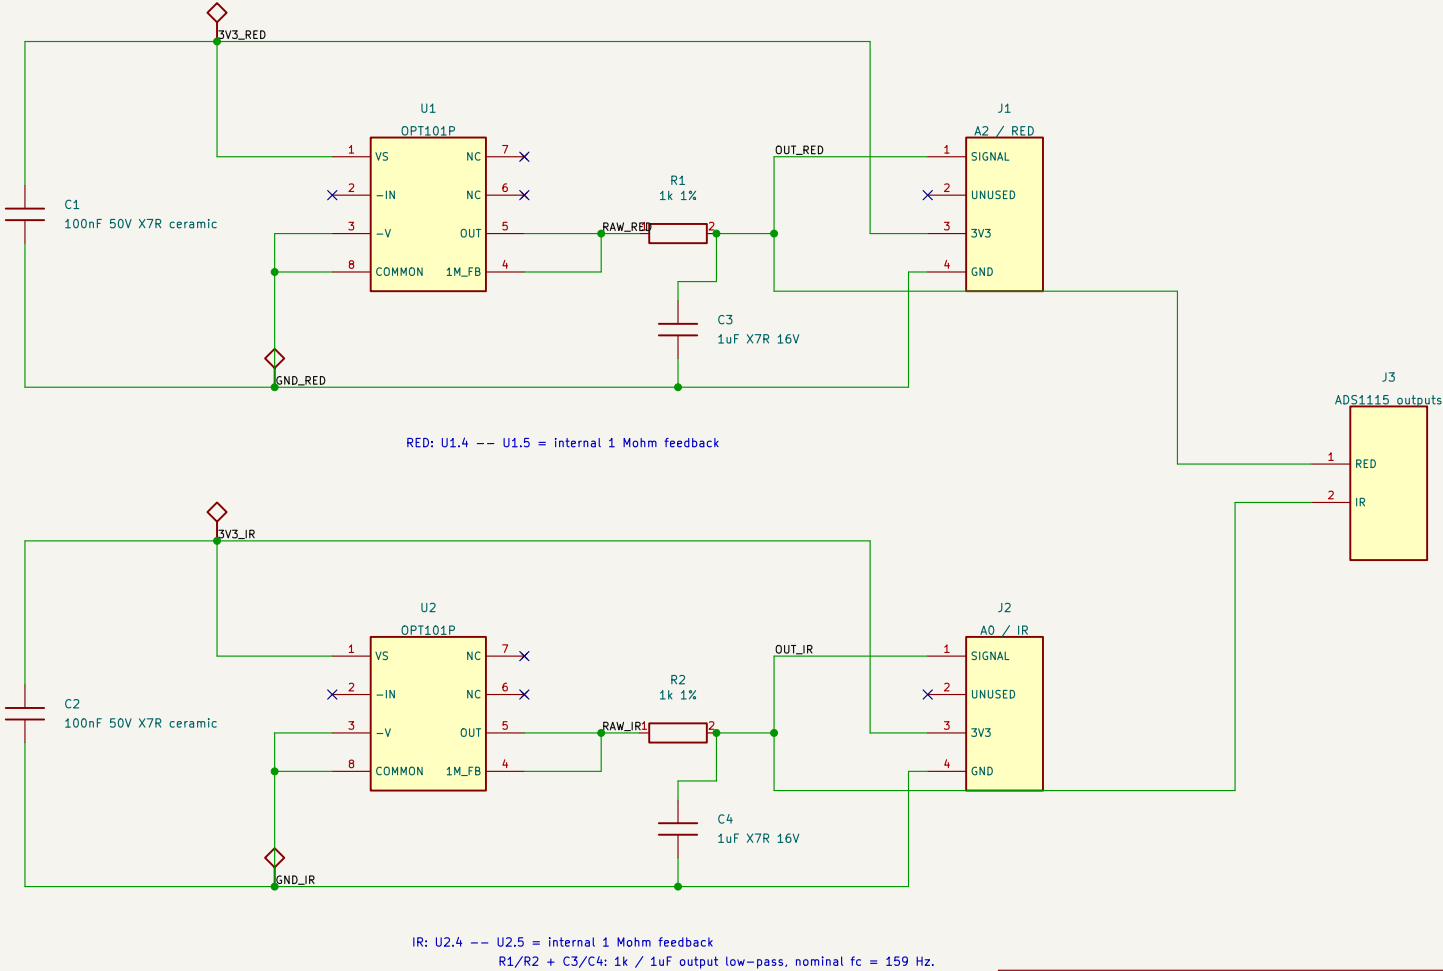

70 x 20 mm / DIP-8 sockets / Grove A0 IR, A2 RED

Sheet: /
File: opt101_receiver.kicad_sch

Title: PPG – Dual OPT101P receiver

Size: A4

Date: 2026-10-02

Rev: 1.5

KiCad E.D.A. 10.0.6

Id: 1/1