


# DATN: PPG-Simulator | V-cut panel

TOP VIEW - 3 DIFFERENT DESIGNS / 1 COPY EACH

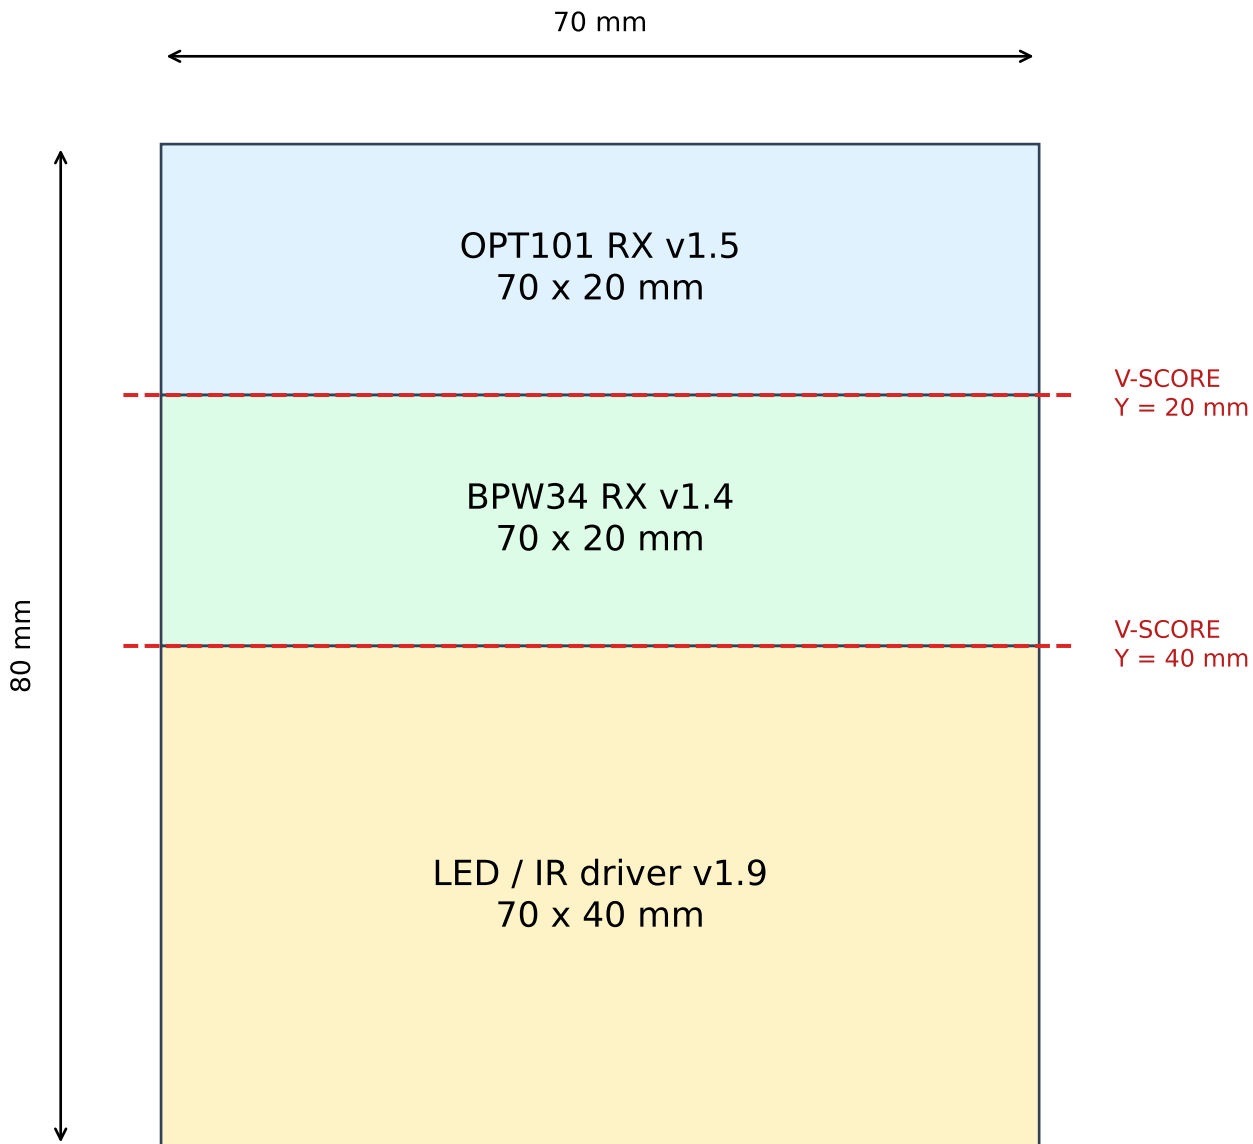

FR-4 1.6 mm | 2 copper layers | 1 oz copper | mask + silk both sides

2 full-width V-score centre-lines: Y = 20 mm and 40 mm from top edge.

Score BOTH sides. Factory selects depth / remaining web for 1.6 mm FR-4.

User\_Comments Gerber = V-SCORE guide. Do NOT mill these into slots.

Edge\_Cuts Gerber = outer 70 x 80 mm rectangle only. Zero routing gap.

Copper-to-score centre clearance  $\geq 0.60$  mm on EACH side.

No electrical connections cross a score. Depanel BEFORE assembly.

CAD origin (50,50) mm: score lines are at absolute Y=70 and Y=90 mm.

Factory to confirm scoring capability, tolerances and 3-design panel pricing.

Dimensions govern. Drawing NOT TO SCALE. See README and drill files.