Progress indicators

Resources: +4

Variants

1. Linear progress indicator
2. Circular progress indicator

Variant	M3	M3 Expressive
Linear progress indicator	Available	Available
Circular progress indicator	Available	Available

Configurations



1. Behavior: Determinate and indeterminate
2. Thickness: Default (4dp) and variable
3. Shape: Flat and wavy

Category	Configuration	M3	M3 Expressive
Behavior	Determinate (default), Indeterminate	Available	Available
Track thickness	Fixed (4dp)	Available	Available
	Configurable	--	Available
Shape	Flat (default)	Available	Available
	Wavy	--	Available

Tokens & specs

Browse the component elements, attributes, tokens, and their values. View baseline tokens

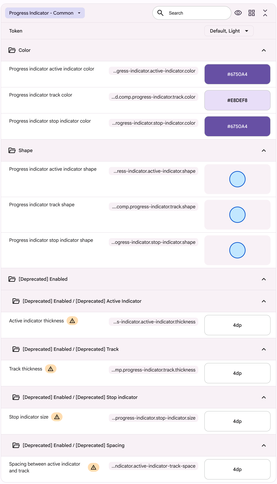

Anatomy

1. Active indicator
2. Track
3. Stop indicator

Color



Progress indicator color roles used for light and dark schemes:

1. Primary
2. Secondary container

Measurements

Wavy indicators use **amplitude** and **wavelength** to determine the shape of the wave. The height is the overall container height.

Amplitude measures from the center of the resting position to the center of the peak

Wavelength measures the distance between two adjacent peaks



Size measurements for linear progress indicators. The thicker variants are provided as sample measurement for makers to adjust the default version based on their use cases.

Size measurements for circular progress indicators. The thicker variants are provided as sample measurement for makers to adjust the default version based on their use cases.

The linear progress indicator is inset from the edge of the screen by 4dp