
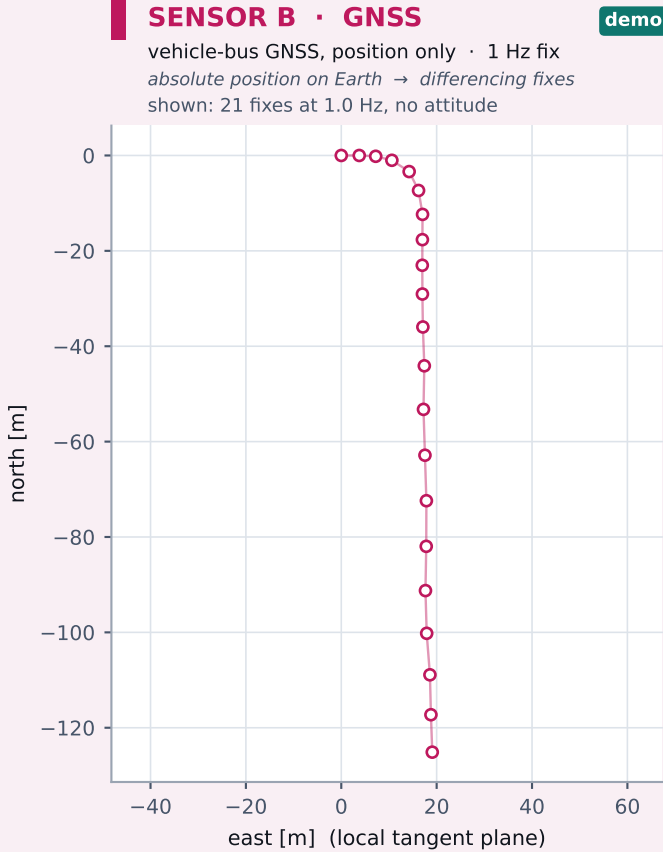


One interface, four front ends

Each tinted column is one drive: two different physical devices on top, and the dashed ODOMETRY card below holding what both of them were reduced to. Badge “paper” marks the front end used in the paper’s experiments.

A2D2 · drive 20180810_150607

two devices · no shared field of view, clock or quantity

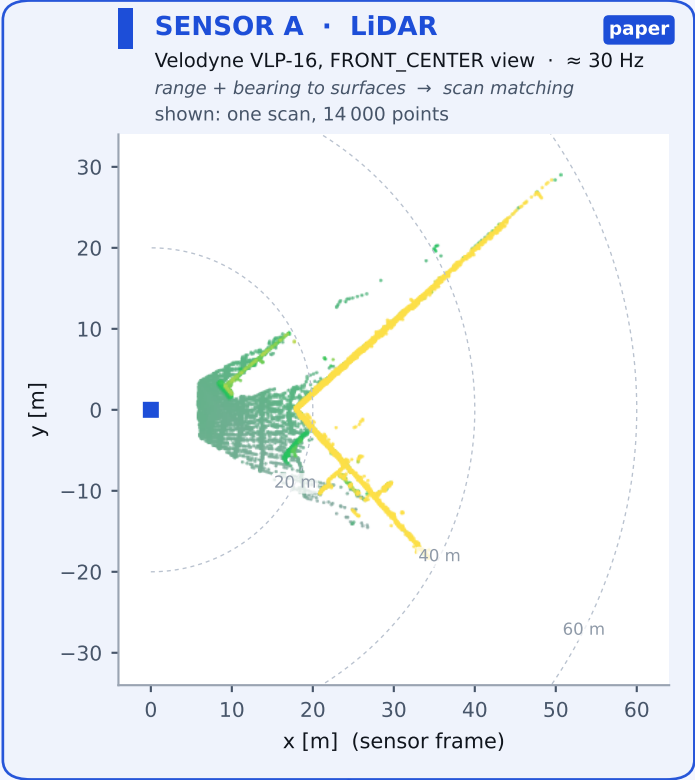


ODOMETRY

both devices deliver (v, ω) on their own clock


Trajectory from (v, ω)

139 m driven, -88° of heading

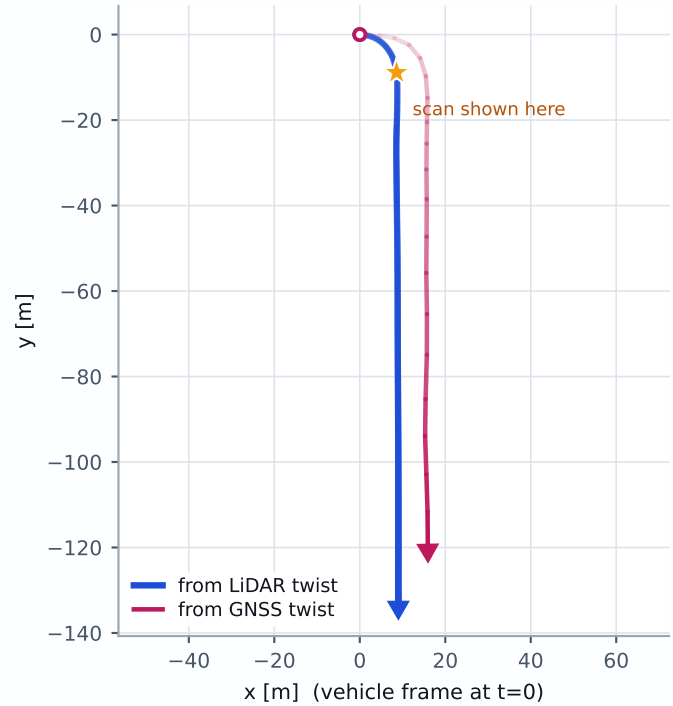



The twist, as delivered

path speed 6.95 vs 6.98 m/s · median ω gap 0.0242 rad/s

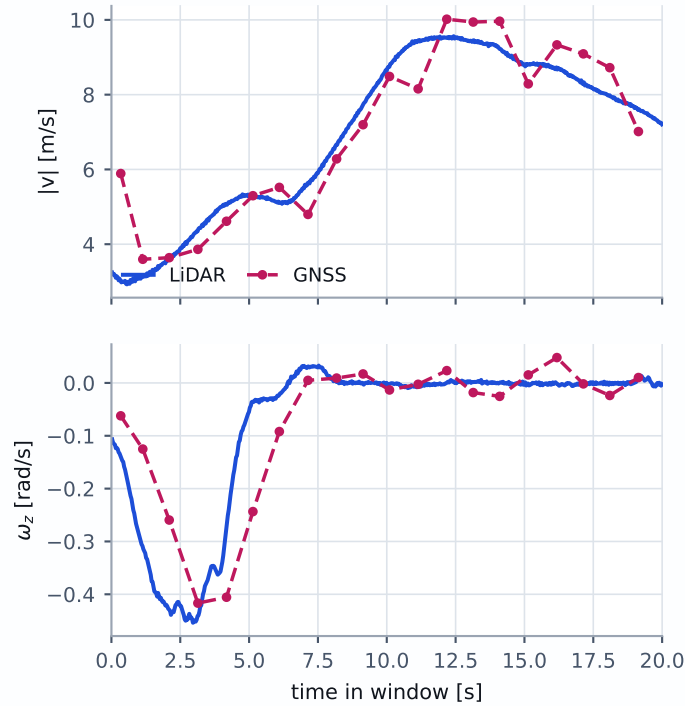

RadarScenes · sequence 1

two devices · no shared field of view, clock or quantity

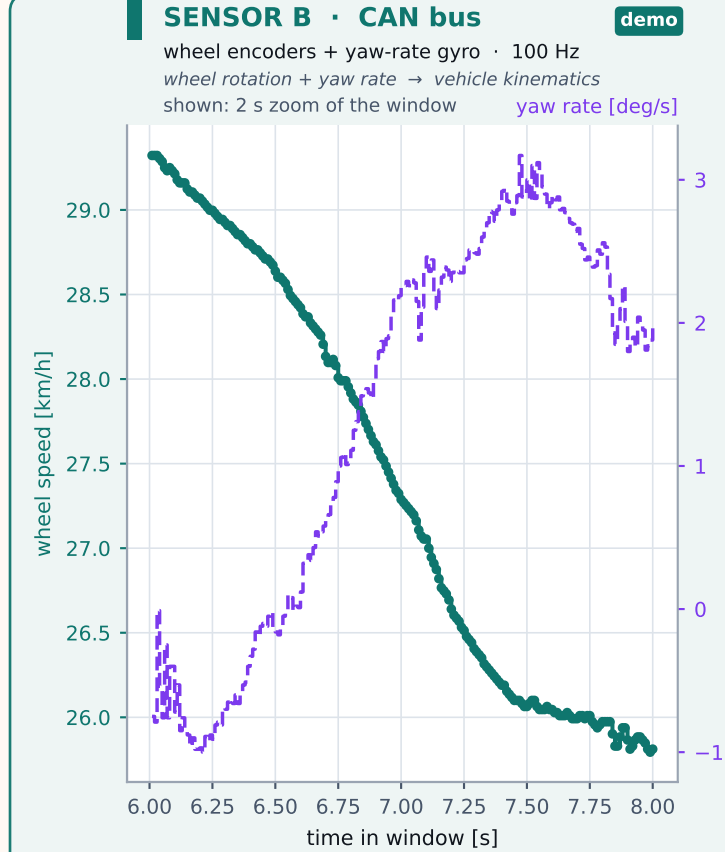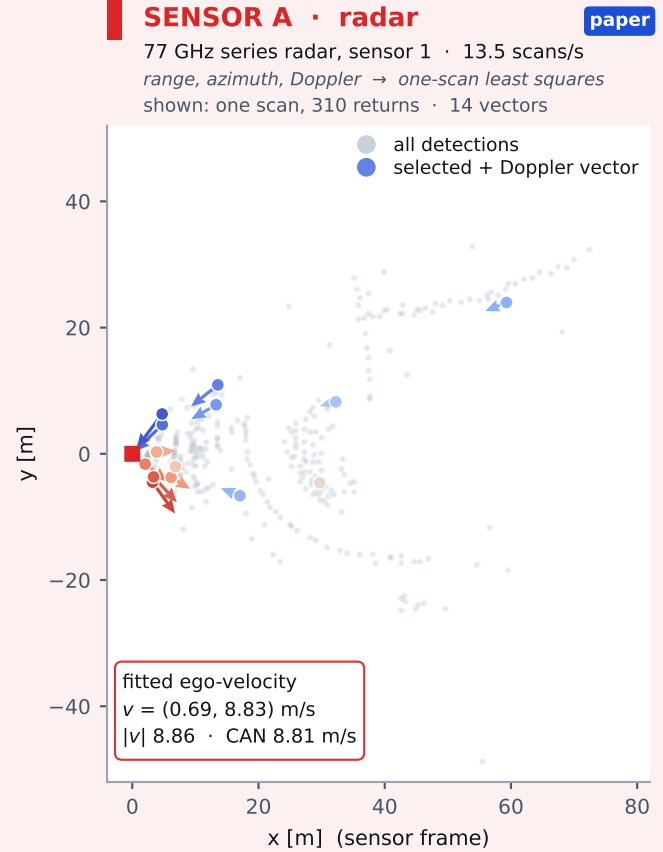


ODOMETRY

both devices deliver (v, ω) on their own clock

Trajectory from (v, ω)

105 m driven, 22° of heading

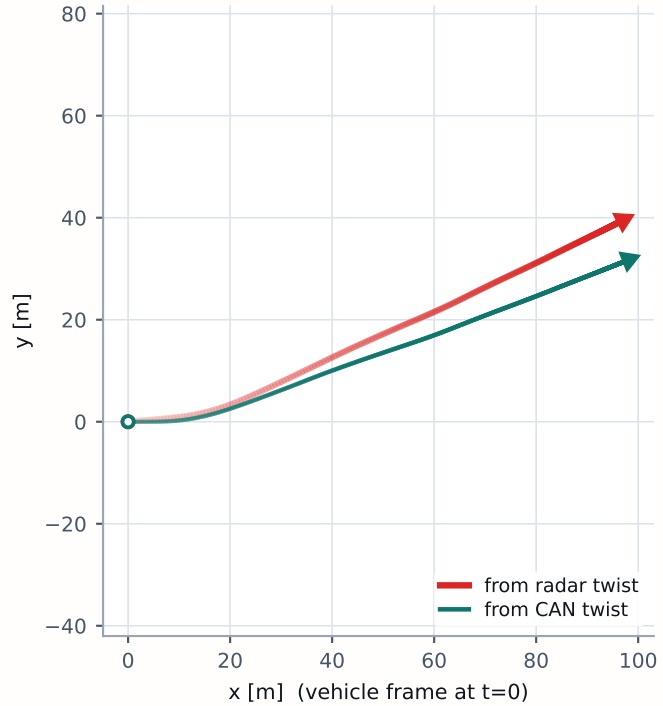

The twist, as delivered

median $|v|$ gap 0.078 m/s · one 2-D radar gives no ω

