


Module TB6560

MH: 002304

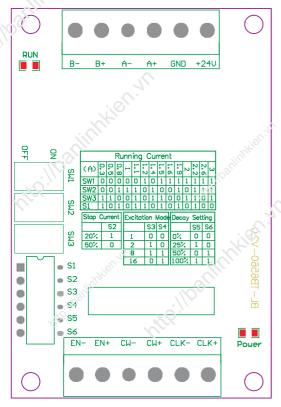

Name	Depiction			
+24V, GND	Power			
A+, A-	Α			
B+, B	В			
CLK+, CLK-	CLK			
CW+, CW-	CW			
EN+, EN-	EN			

Running Current														
(A)	0.3	0.5	0.8	1	1.1	1.2	1.4	1.5	1.6	1.9	2	2.2	2.6	3
SW1	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	ON.	ON	ON	ON	ON	ON
SW2	OFF	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON
sw3	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON
S1	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF

Stop Current				
	S2			
20%	CM			
50%	OFF			

Excitation Mode				
<i>x</i> ':?'	S3	S4		
Full	OFF	OFF		
Hafl Step	ON	OFF		
8	ON	ON		
16	OFF	ON		

Decay Setting					
	S5	S6			
0%	OFF	OFF			
25%	ON NO	OFF			
50%	OFF	ON			
100%	CN	ON			

Thông tin sản phẩm vui lòng truy cập http://banlinhkien.vn