
Program blocks

Main [OB1]


Main Properties							
General							
Name	Main	**Number**	1	**Type**	OB	**Language**	LAD
Numbering	Automatic						
Information							
Title	"Main Program Sweep (Cycle)"	**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Default value	Comment
▼ Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
Temp			
Constant			


Network 1:

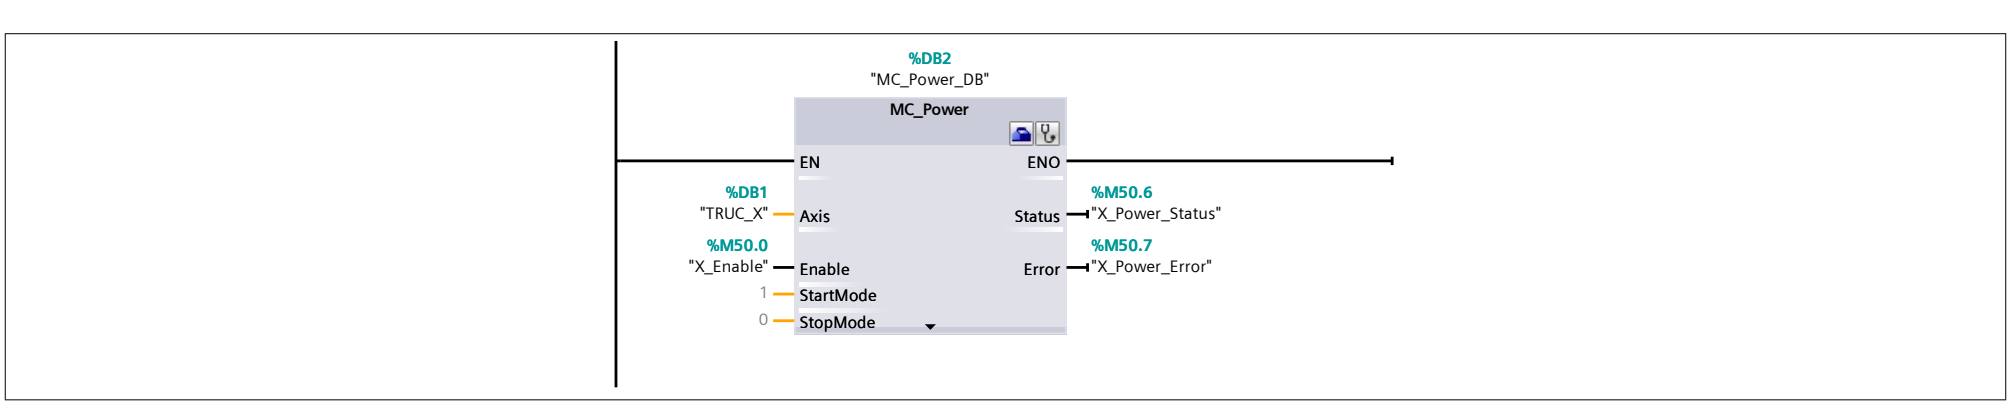


Network 2:

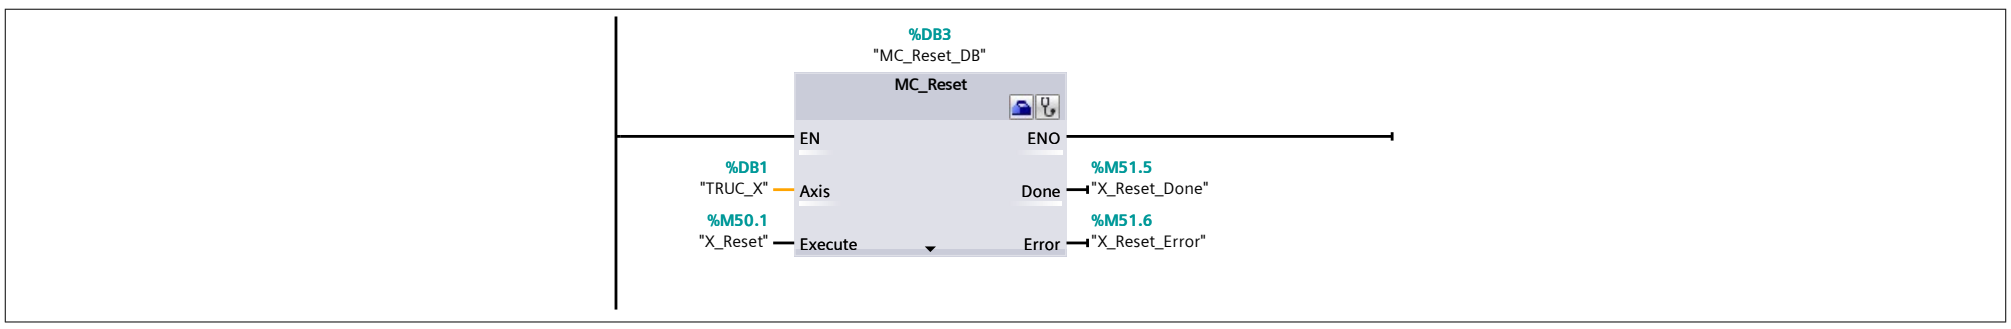


Network 3:

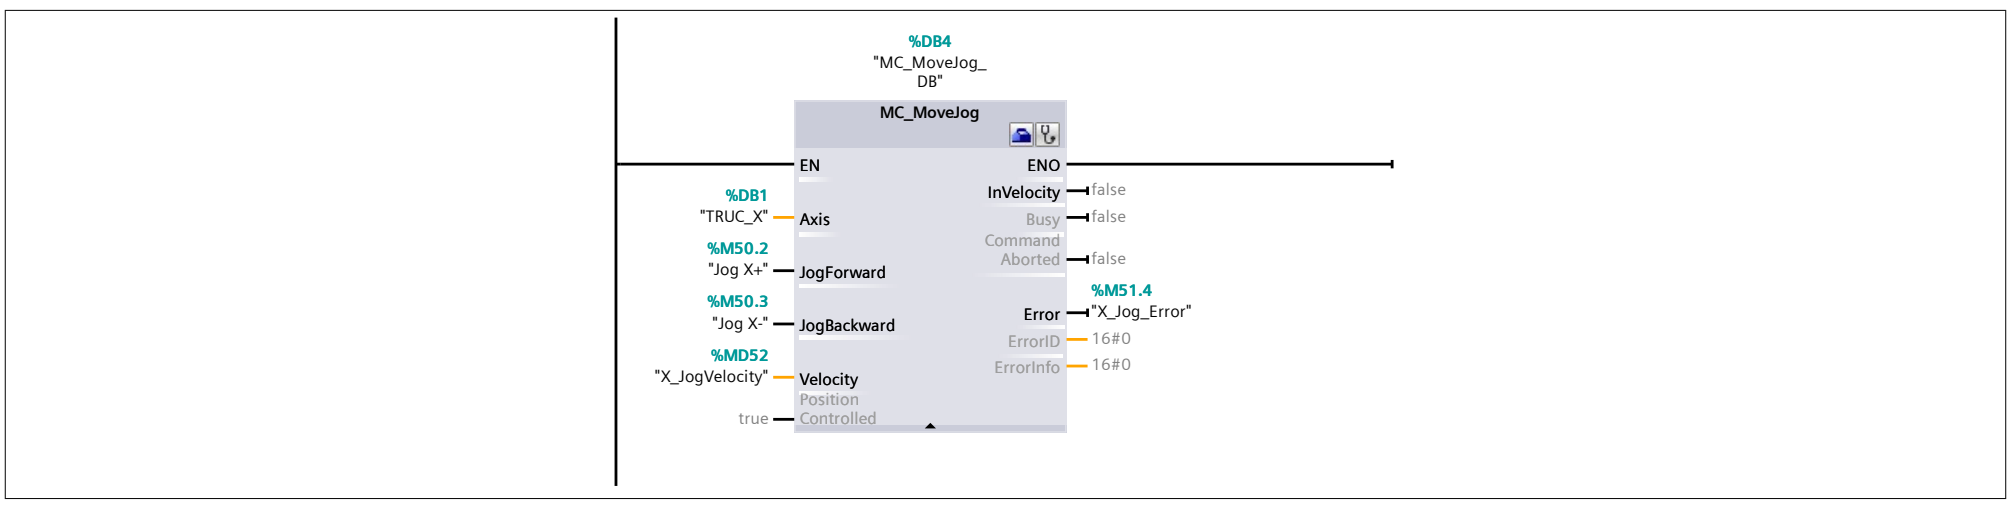


Network 4:

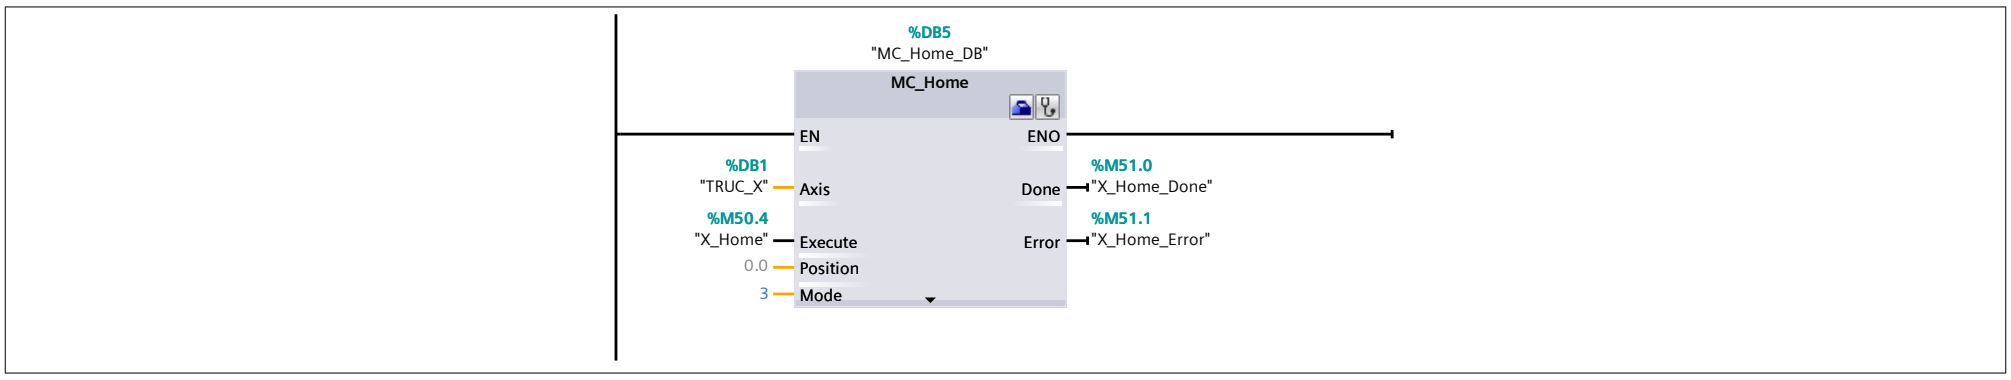


Network 5:

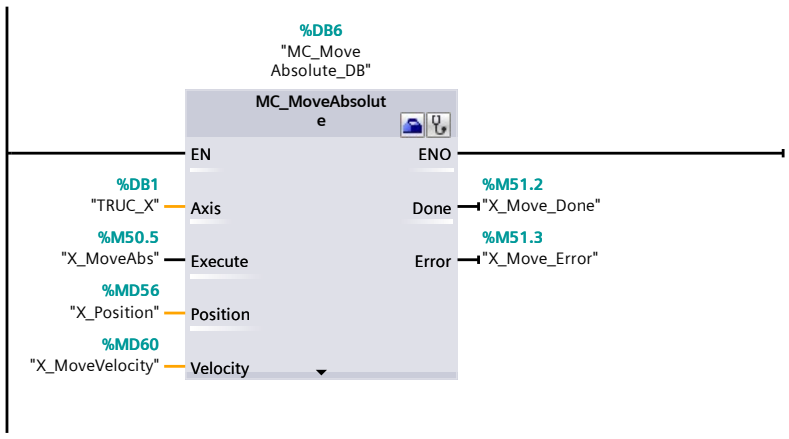


Network 6:

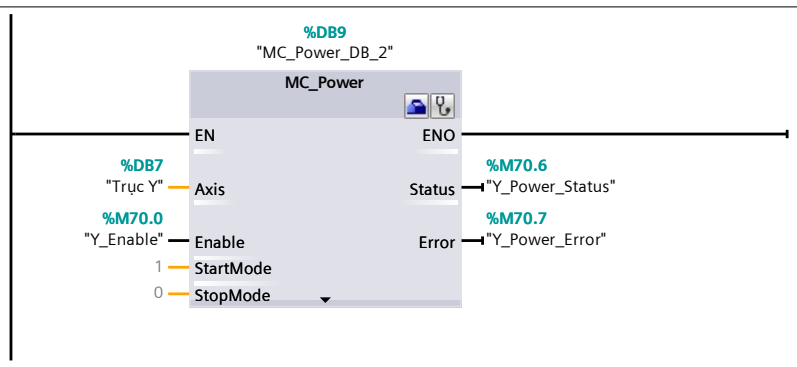


Network 7:

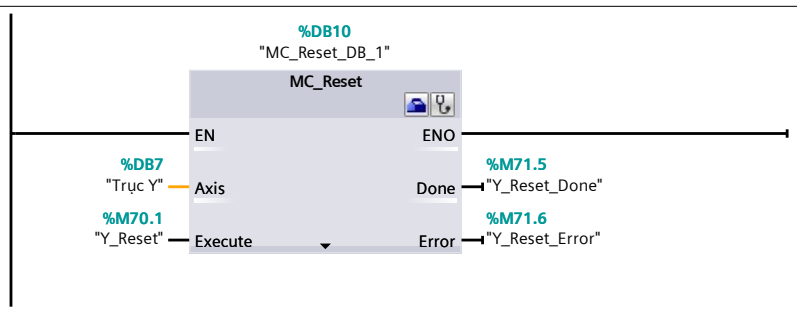


Network 8:

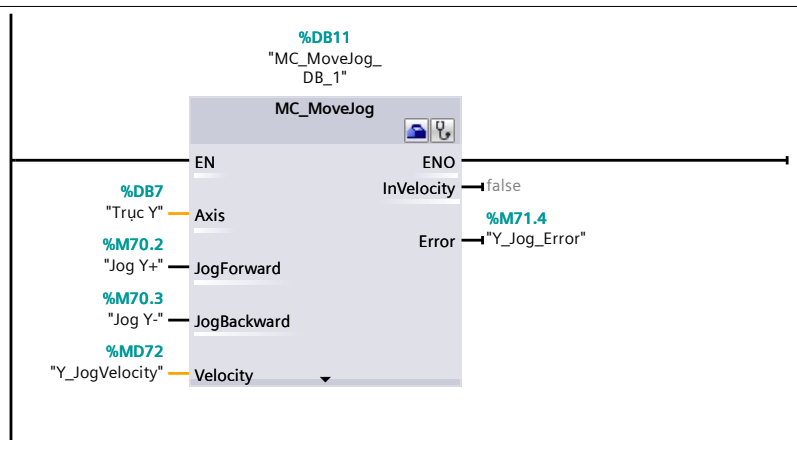


Network 9:

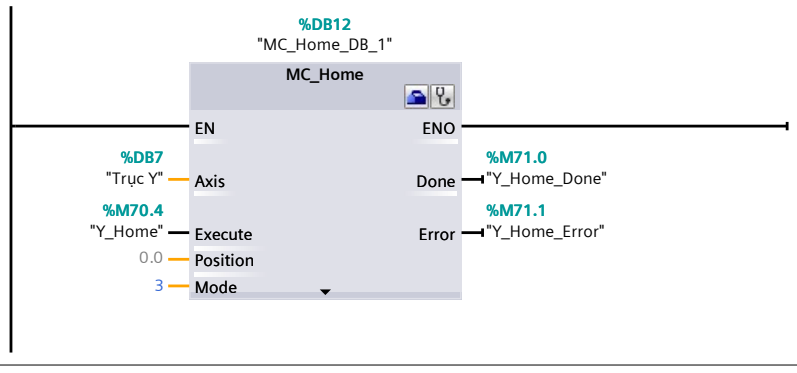


Network 10:

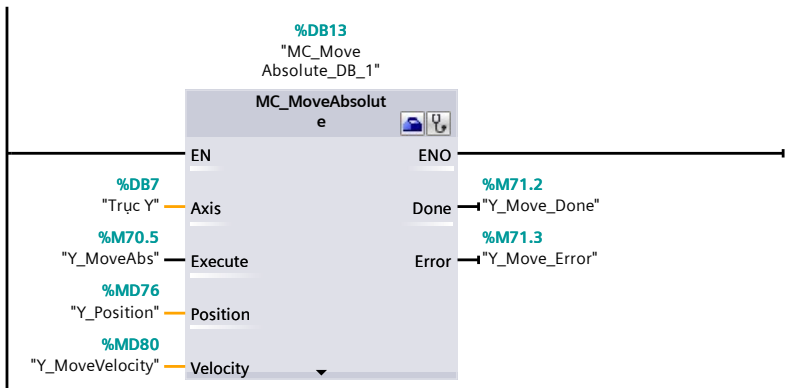


Network 11:

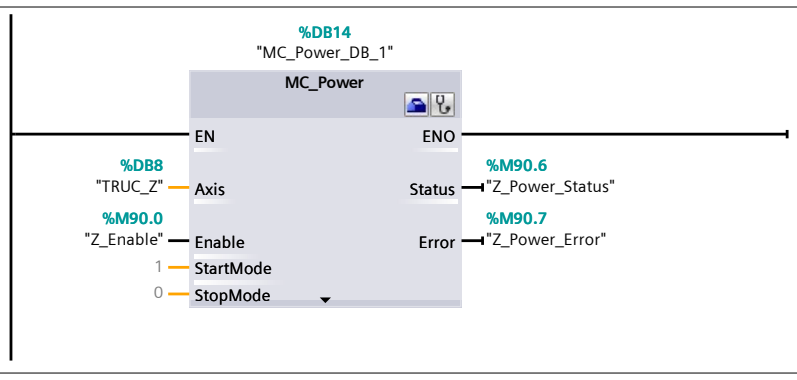


Network 12:

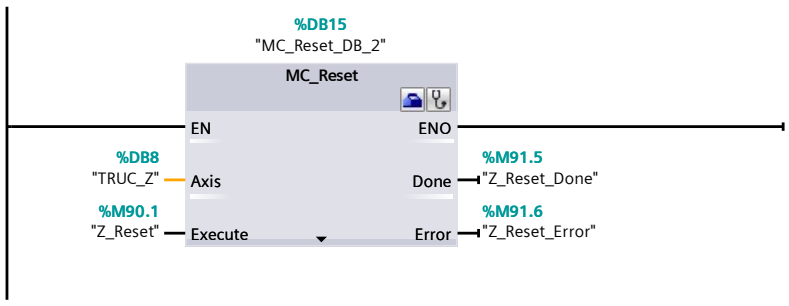


Network 13:

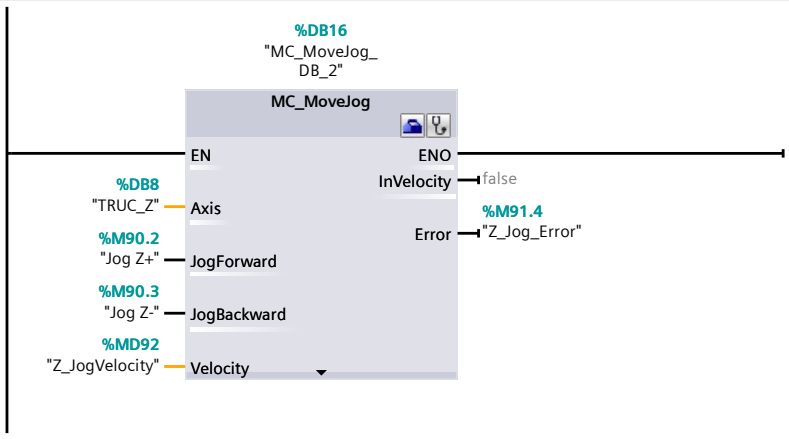


Network 14:

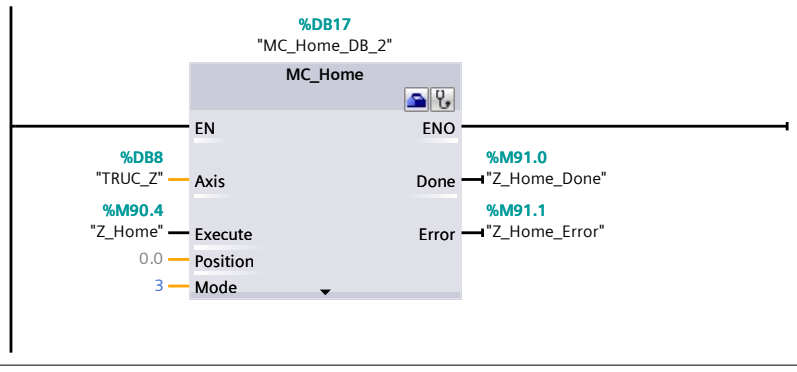


Network 15:

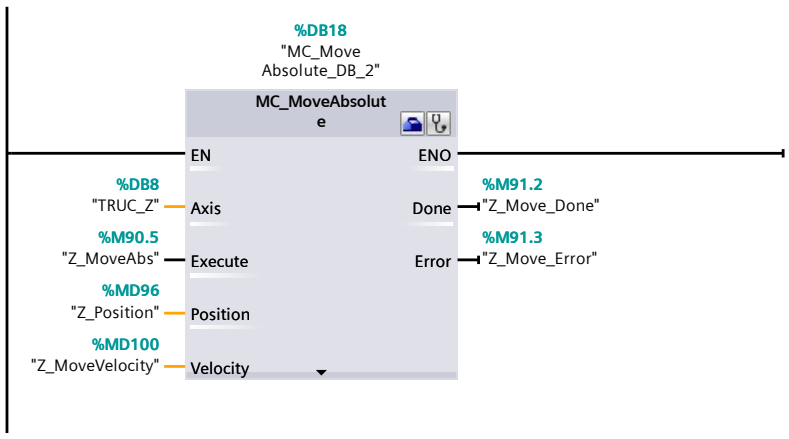


Network 16: MANUAL

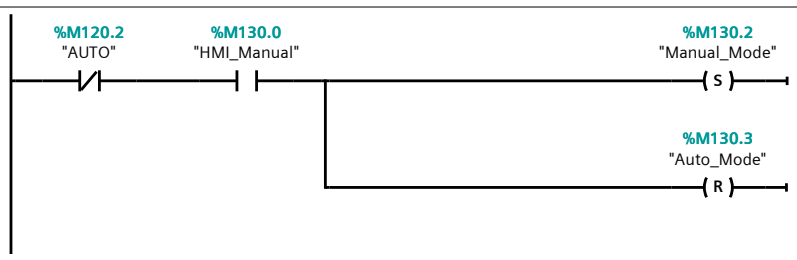

Network 17:

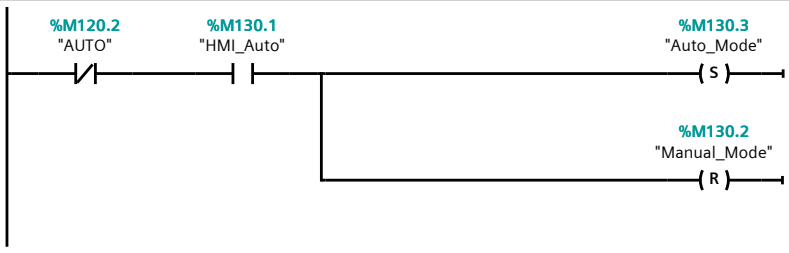


Network 18:

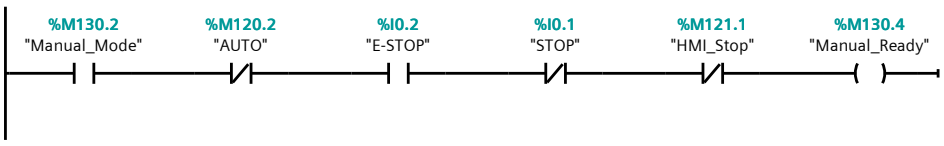


Network 19:




Network 20:

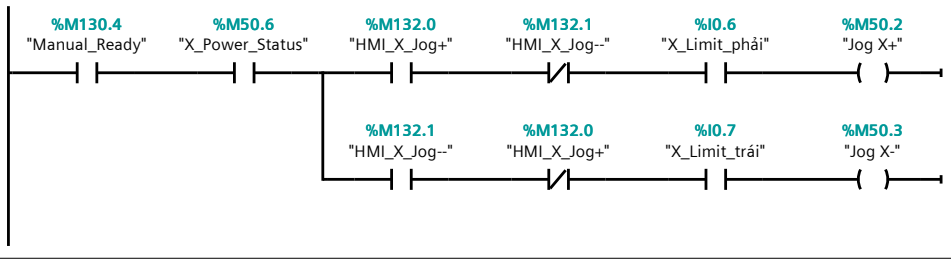


Network 21:

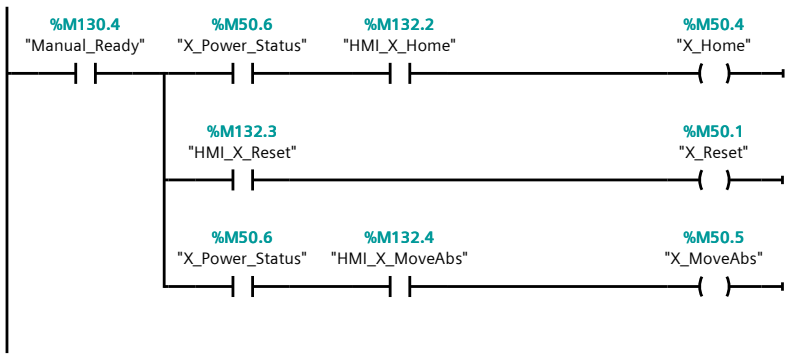


Network 22:

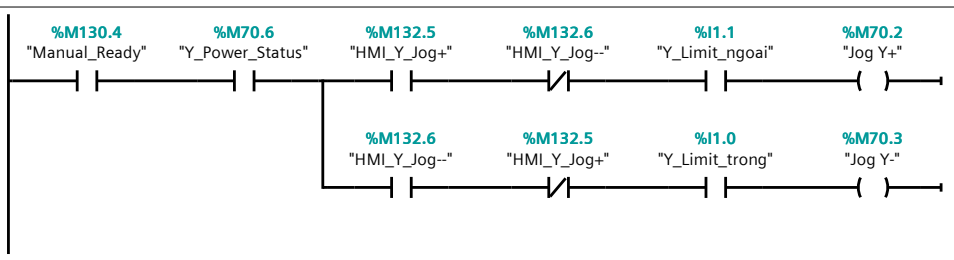

Network 23:

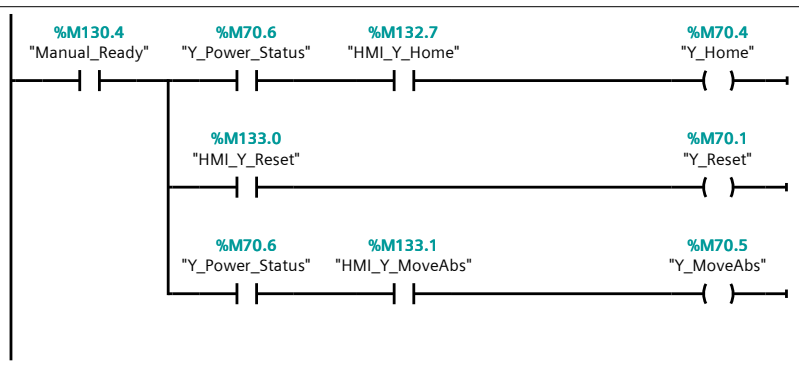


Network 24:

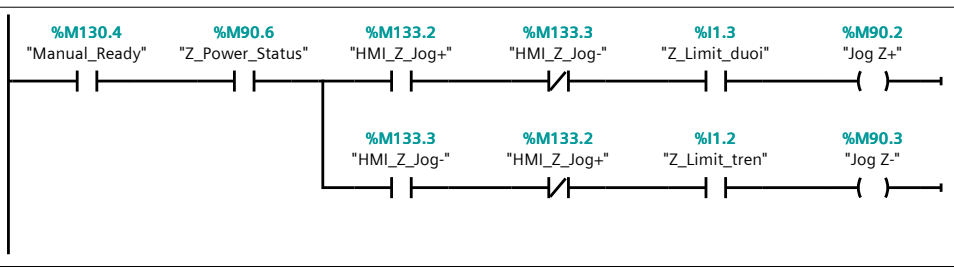


Network 25:


Network 26:

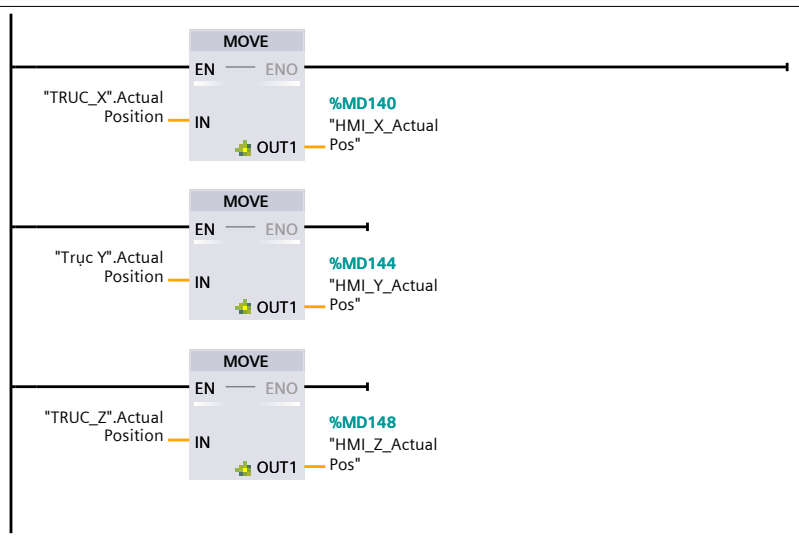


Network 27:

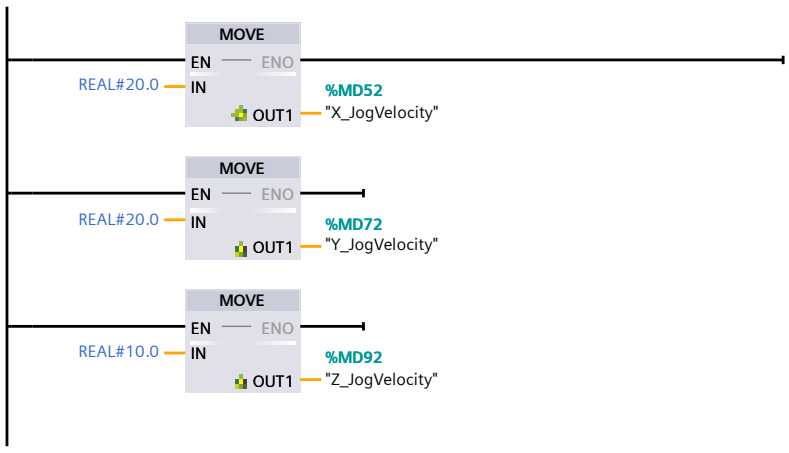


Network 28:




Network 31:

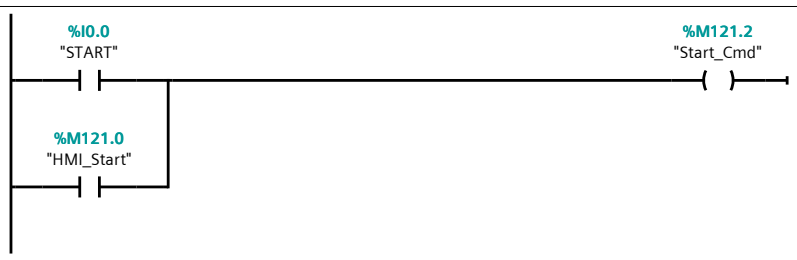


Network 32:

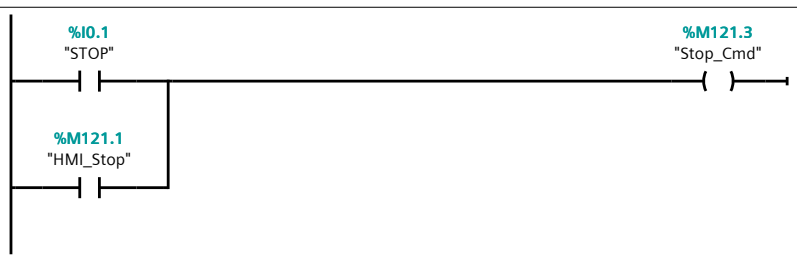


Network 33:

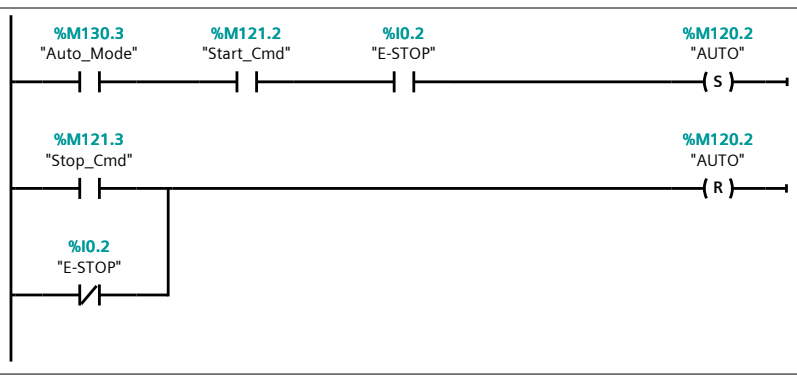

Network 34:

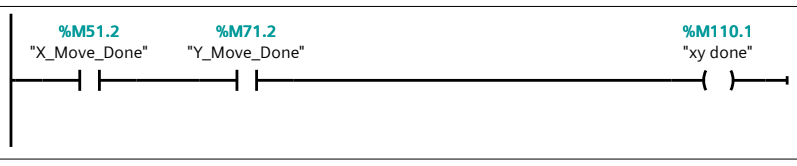


Network 35:

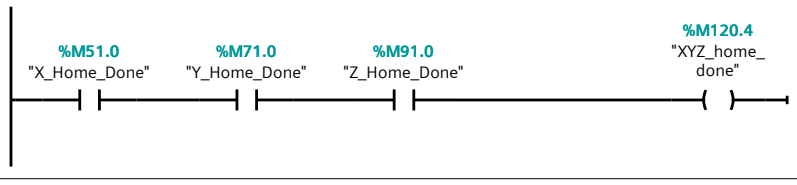

Network 36:


%M120.2
"AUTO"
MOVE
EN
ENO
0
IN
OUT1
%MW124
"AUTO_Step"

Network 37:

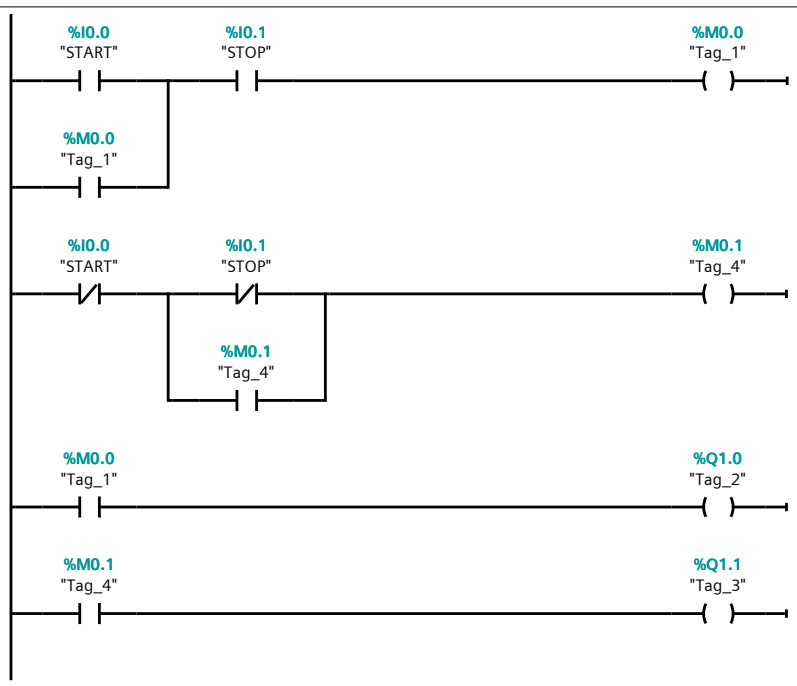
%I0.0
"START"
%I0.1
"STOP"
%M0.0
"Tag_1"
%M0.0
"Tag_1"
%I0.0
"START"
%I0.1
"STOP"
%M0.1
"Tag_4"
%M0.1
"Tag_4"
%M0.0
"Tag_1"
%Q1.0
"Tag_2"
%M0.1
"Tag_4"
%Q1.1
"Tag_3"

Program blocks / System blocks / Program resources

MC_Power [FB1107]

MC_Power Properties							
General							
Name	MC_Power	**Number**	1107	**Type**	FB	**Language**	SCL
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Power				

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
▼ Axis	TO_Axis			False	False	False	False		Used technology object "Axis"
▼ Base	TO_AnyMotionObject			False	False	False	False		
Input									
Output									
InOut									
▼ Static									
▼ Header	TO_Struct_Header		Non-retain	False	False	False	False		Version information of technology object
VersionMaj	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
VersionMin	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Type	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Reserved1	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Reserved2	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Input									
Output									
InOut									
Static									
Enable	Bool	false	Non-retain	True	True	True	False		Enable axis
StartMode	Int	1	Non-retain	True	True	True	False		Start mode on enabling of axis
StopMode	Int	0	Non-retain	True	True	True	False		Stop mode when disabling axis
▼ Output									
Status	Bool	false	Non-retain	True	True	True	False		Axis is enabled
Busy	Bool	false	Non-retain	True	True	True	False		MC_Power is active
Error	Bool	false	Non-retain	True	True	True	False		Error at MC_Power or associated technology object
ErrorID	Word	16#0	Non-retain	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	Non-retain	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	Non-retain	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_Power_DB [DB2]

MC_Power_DB Properties							
General							
Name	MC_Power_DB	**Number**	2	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Power				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
Axis	TO_Axis		False	False	False	False	False		Used technology object "Axis"
Enable	Bool	false	False	True	True	True	False		Enable axis
StartMode	Int	1	False	True	True	True	False		Start mode on enabling of axis
StopMode	Int	0	False	True	True	True	False		Stop mode when disabling axis
▼ Output									
Status	Bool	false	False	True	True	True	False		Axis is enabled
Busy	Bool	false	False	True	True	True	False		MC_Power is active
Error	Bool	false	False	True	True	True	False		Error at MC_Power or associated technology object
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_Reset [FB1108]

MC_Reset Properties							
General							
Name	MC_Reset	**Number**	1108	**Type**	FB	**Language**	SCL
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Reset				

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
▼ Axis	TO_Axis			False	False	False	False		Used technology object "Axis"
▼ Base	TO_AnyMotionObject			False	False	False	False		
Input									
Output									
InOut									
▼ Static									
▼ Header	TO_Struct_Header		Non-retain	False	False	False	False		Version information of technology object
VersionMaj	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
VersionMin	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Type	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Reserved1	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Reserved2	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Input									
Output									
InOut									
Static									
Execute	Bool	false	Non-retain	True	True	True	False		Start command
Restart	Bool	false	Non-retain	True	True	True	False		Execute axis restart
▼ Output									
Done	Bool	false	Non-retain	True	True	True	False		Job is completed
Busy	Bool	false	Non-retain	True	True	True	False		Job is being executed
Error	Bool	false	Non-retain	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	Non-retain	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	Non-retain	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	Non-retain	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_Reset_DB [DB3]

MC_Reset_DB Properties							
General							
Name	MC_Reset_DB	**Number**	3	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Reset				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Input									
Axis	TO_Axis		False	False	False	False	False		Used technology object "Axis"
Execute	Bool	false	False	True	True	True	False		Start command
Restart	Bool	false	False	True	True	True	False		Execute axis restart
▼ Output									
Done	Bool	false	False	True	True	True	False		Job is completed
Busy	Bool	false	False	True	True	True	False		Job is being executed
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_MoveJog [FB1103]

MC_MoveJog Properties							
General							
Name	MC_MoveJog	**Number**	1103	**Type**	FB	**Language**	SCL
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_MvJog				

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
▼ Axis	TO_SpeedAxis			False	False	False	False		Used technology object "Axis"
▼ Base	TO_Axis			False	False	False	False		
▼ Base	TO_AnyMotionObject			False	False	False	False		
Input									
Output									
InOut									
▼ Static									
▼ Header	TO_Struct_Header		Non-retain	False	False	False	False		Version information of technology object
VersionMaj	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
VersionMin	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Type	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Reserved1	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Reserved2	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Input									
Output									
InOut									
Static									
Input									
Output									
InOut									
Static									
JogForward	Bool	false	Non-retain	True	True	True	False		Jogging in positive direction
JogBackward	Bool	false	Non-retain	True	True	True	False		Jogging in negative direction
Velocity	Real	10.0	Non-retain	True	True	True	False		Target velocity of axis
PositionControlled	Bool	true	Non-retain	True	True	True	False		Position-controlled mode
▼ Output									
InVelocity	Bool	false	Non-retain	True	True	True	False		Target velocity of axis was reached
Busy	Bool	false	Non-retain	True	True	True	False		Job is being executed
CommandAborted	Bool	false	Non-retain	True	True	True	False		Job was cancelled
Error	Bool	false	Non-retain	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	Non-retain	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	Non-retain	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	Non-retain	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_MoveJog_DB [DB4]

MC_MoveJog_DB Properties							
General							
Name	MC_MoveJog_DB	**Number**	4	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_MvJog				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
Axis	TO_SpeedAxis		False	False	False	False	False		Used technology object "Axis"
JogForward	Bool	false	False	True	True	True	False		Jogging in positive direction
JogBackward	Bool	false	False	True	True	True	False		Jogging in negative direction
Velocity	Real	10.0	False	True	True	True	False		Target velocity of axis
PositionControlled	Bool	true	False	True	True	True	False		Position-controlled mode
▼ Output									
InVelocity	Bool	false	False	True	True	True	False		Target velocity of axis was reached
Busy	Bool	false	False	True	True	True	False		Job is being executed
CommandAborted	Bool	false	False	True	True	True	False		Job was cancelled
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_Home [FB1101]

MC_Home Properties							
General							
Name	MC_Home	**Number**	1101	**Type**	FB	**Language**	SCL
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Home				

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
▼ Axis	TO_Axis			False	False	False	False		Used technology object "Axis"
▼ Base	TO_AnyMotionObject			False	False	False	False		
Input									
Output									
InOut									
▼ Static									
▼ Header	TO_Struct_Header		Non-retain	False	False	False	False		Version information of technology object
VersionMaj	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
VersionMin	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Type	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Reserved1	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Reserved2	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Input									
Output									
InOut									
Static									
Execute	Bool	false	Non-retain	True	True	True	False		Start command
Position	Real	0.0	Non-retain	True	True	True	False		Reference point position of axis
Mode	Int	0	Non-retain	True	True	True	False		Homing mode
▼ Output									
Done	Bool	false	Non-retain	True	True	True	False		Job is completed
Busy	Bool	false	Non-retain	True	True	True	False		Job is being executed
CommandAborted	Bool	false	Non-retain	True	True	True	False		Job was cancelled
Error	Bool	false	Non-retain	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	Non-retain	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	Non-retain	True	True	True	False		Error info ID for parameter "ErrorID"
ReferenceMarkPosition	Real	0.0	Non-retain	True	True	True	False		Position at which the technology object was homed
InOut									
▼ Static									
FB_ID	DInt	0	Non-retain	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_Home_DB [DB5]

MC_Home_DB Properties							
General							
Name	MC_Home_DB	**Number**	5	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Home				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
Axis	TO_Axis		False	False	False	False	False		Used technology object "Axis"
Execute	Bool	false	False	True	True	True	False		Start command
Position	Real	0.0	False	True	True	True	False		Reference point position of axis
Mode	Int	0	False	True	True	True	False		Homing mode
▼ Output									
Done	Bool	false	False	True	True	True	False		Job is completed
Busy	Bool	false	False	True	True	True	False		Job is being executed
CommandAborted	Bool	false	False	True	True	True	False		Job was cancelled
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
ReferenceMarkPosition	Real	0.0	False	True	True	True	False		Position at which the technology object was homed
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_MoveAbsolute [FB1102]

MC_MoveAbsolute Properties							
General							
Name	MC_MoveAbsolute	**Number**	1102	**Type**	FB	**Language**	SCL
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_MvAbs				

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Input									
Axis	TO_PositioningAxis			False	False	False	False		Used technology object "Axis"
Base	TO_SpeedAxis			False	False	False	False		
Base	TO_Axis			False	False	False	False		
Base	TO_AnyMotionObject			False	False	False	False		
Input									
Output									
InOut									
Static									
Header	TO_Struct_Header		Non-retain	False	False	False	False		Version information of technology object
VersionMaj	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
VersionMin	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Type	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Reserved1	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Reserved2	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Input									
Output									
InOut									
Static									
Input									
Output									
InOut									
Static									
Input									
Output									
InOut									
Static									
Position	Real		Non-retain	False	False	False	False		Current axis position
Velocity	Real		Non-retain	False	False	False	False		Current axis velocity
ActualPosition	Real		Non-retain	False	False	False	False		Actual position of the axis
ActualVelocity	Real		Non-retain	False	False	False	False		Actual velocity of the axis
Actor	TO_Struct_Actor		Non-retain	False	False	False	False		Configuration data of drive connection
Type	DInt		Non-retain	False	False	False	False		Type of drive connection
InverseDirection	Bool		Non-retain	False	False	False	False		Invert direction signal
DirectionMode	Int		Non-retain	False	False	False	False		Permitted direction of rotation
DataAdaption	DInt		Non-retain	False	False	False	False		Automatic transfer of drive parameters to the CPU
PTOSliceTime	Int		Non-retain	False	False	False	False		Segment time for PTO
Interface	TO_Struct_ActorInterface		Non-retain	False	False	False	False		Configuration data of drive interface
AddressIn	VREF		Non-retain	False	False	False	False		Drive telegram (internal parameter)
RID	DWord		Non-retain	False	False	False	False		
AREA	Byte		Non-retain	False	False	False	False		
DB_NUMBER	UInt		Non-retain	False	False	False	False		
OFFSET	UDInt		Non-retain	False	False	False	False		
AddressOut	VREF		Non-retain	False	False	False	False		Drive telegram (internal parameter)
RID	DWord		Non-retain	False	False	False	False		
AREA	Byte		Non-retain	False	False	False	False		
DB_NUMBER	UInt		Non-retain	False	False	False	False		
OFFSET	UDInt		Non-retain	False	False	False	False		
EnableDriveOutput	VREF		Non-retain	False	False	False	False		Enable output

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
RID	DWord		Non-retain	False	False	False	False		
AREA	Byte		Non-retain	False	False	False	False		
DB_NUMBER	UInt		Non-retain	False	False	False	False		
OFFSET	UDInt		Non-retain	False	False	False	False		
▼ DriveReadyInput	VREF		Non-retain	False	False	False	False		Ready input
RID	DWord		Non-retain	False	False	False	False		
AREA	Byte		Non-retain	False	False	False	False		
DB_NUMBER	UInt		Non-retain	False	False	False	False		
OFFSET	UDInt		Non-retain	False	False	False	False		
PTO	DWord		Non-retain	False	False	False	False		Pulse output
▼ DriveParameter	TO_Struct_ActorDriveParameter		Non-retain	False	False	False	False		Configuration data of drive parameters
ReferenceSpeed	Real		Non-retain	False	False	False	False		Enter reference speed of drive
MaxSpeed	Real		Non-retain	False	False	False	False		Enter maximum drive speed
PulsesPerDriveRevolution	DInt		Non-retain	False	False	False	False		Pulses per motor revolution
▼ Sensor	Array[1..1] of TO_Struct_Sensor		Non-retain	False	False	False	False		Configuration data of encoder
▼ Sensor[1]	TO_Struct_Sensor		Non-retain	False	False	False	False		Configuration data of encoder
Type	DInt		Non-retain	False	False	False	False		Encoder type (internal parameter)
InverseDirection	Bool		Non-retain	False	False	False	False		Invert rotation direction of encoder signals
System	DInt		Non-retain	False	False	False	False		Encoder system
MountingMode	DInt		Non-retain	False	False	False	False		Select encoder mounting type
DataAdaption	DInt		Non-retain	False	False	False	False		Automatic transfer of encoder parameters to the CPU
▼ Interface	TO_Struct_SensorInterface		Non-retain	False	False	False	False		Configuration data of encoder interface
▼ AddressIn	VREF		Non-retain	False	False	False	False		Encoder telegram (internal parameter)
RID	DWord		Non-retain	False	False	False	False		
AREA	Byte		Non-retain	False	False	False	False		
DB_NUMBER	UInt		Non-retain	False	False	False	False		
OFFSET	UDInt		Non-retain	False	False	False	False		
▼ AddressOut	VREF		Non-retain	False	False	False	False		Encoder telegram (internal parameter)
RID	DWord		Non-retain	False	False	False	False		
AREA	Byte		Non-retain	False	False	False	False		
DB_NUMBER	UInt		Non-retain	False	False	False	False		
OFFSET	UDInt		Non-retain	False	False	False	False		
Type	DInt		Non-retain	False	False	False	False		Encoder connection (internal parameter)
HSC	DWord		Non-retain	False	False	False	False		High speed counter
Number	UDInt		Non-retain	False	False	False	False		Encoder number
▼ Parameter	TO_Struct_SensorParameter		Non-retain	False	False	False	False		Configuration data of encoder
Resolution	Real		Non-retain	False	False	False	False		Distance between two increments
StepsPerRevolution	UDInt		Non-retain	False	False	False	False		Number of encoder steps per revolution
FineResolutionXist1	UDInt		Non-retain	False	False	False	False		Number of bits for fine resolution in incremental actual value (Gn_XIST1)
FineResolutionXist2	UDInt		Non-retain	False	False	False	False		Bits in abs. actual value (GN_XIST2)
DeterminableRevolutions	UDInt		Non-retain	False	False	False	False		Number of encoder steps per revolution
DistancePerRevolution	Real		Non-retain	False	False	False	False		Load revolutions per number of motor revolutions
BehaviourGx_XIST1	DInt		Non-retain	False	False	False	False		Evaluation of the bits Gx_XIST1
▼ ActiveHoming	TO_Struct_SensorActiveHoming		Non-retain	False	False	False	False		Configuration data for active homing
Mode	DInt		Non-retain	False	False	False	False		Active homing mode
SideInput	Bool		Non-retain	False	False	False	False		Side of reference point switch to which homing is executed with "active homing"
▼ DigitalInputAddress	VREF		Non-retain	False	False	False	False		Input address of homing switch
RID	DWord		Non-retain	False	False	False	False		
AREA	Byte		Non-retain	False	False	False	False		
DB_NUMBER	UInt		Non-retain	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
OFFSET	UDInt		Non-retain	False	False	False	False		
HomePositionOffset	Real		Non-retain	False	False	False	False		Home position offset
SwitchLevel	Bool		Non-retain	False	False	False	False		Selection of signal level pending with approached homing switch at the CPU input
▼ PassiveHoming	TO_Struct_SensorPassiveHoming		Non-retain	False	False	False	False		Configuration data for passive homing
Mode	DInt		Non-retain	False	False	False	False		Passive homing mode
SideInput	Bool		Non-retain	False	False	False	False		Side of reference point switch to which homing is executed with "passive homing"
▼ DigitalInputAddress	VREF		Non-retain	False	False	False	False		Input address of homing switch
RID	DWord		Non-retain	False	False	False	False		
AREA	Byte		Non-retain	False	False	False	False		
DB_NUMBER	UInt		Non-retain	False	False	False	False		
OFFSET	UDInt		Non-retain	False	False	False	False		
SwitchLevel	Bool		Non-retain	False	False	False	False		Selection of signal level pending with approached homing switch at the CPU input
▼ Units	TO_Struct_Units		Non-retain	False	False	False	False		Unit of measurement configuration data
LengthUnit	Int		Non-retain	False	False	False	False		Unit of measurement of parameters
▼ Mechanics	TO_Struct_Mechanics		Non-retain	False	False	False	False		Configuration data of mechanics
LeadScrew	Real		Non-retain	False	False	False	False		Distance per motor revolution
▼ DynamicLimits	TO_Struct_DynamicLimits		Non-retain	False	False	False	False		Configuration data of velocity limits
MaxVelocity	Real		Non-retain	False	False	False	False		Maximum velocity of axis
MinVelocity	Real		Non-retain	False	False	False	False		Start / stop velocity of axis
▼ DynamicDefaults	TO_Struct_DynamicDefaults		Non-retain	False	False	False	False		Configuration data of dynamic settings
Acceleration	Real		Non-retain	False	False	False	False		Acceleration of axis
Deceleration	Real		Non-retain	False	False	False	False		Deceleration of axis
EmergencyDeceleration	Real		Non-retain	False	False	False	False		Emergency stop deceleration of axis
Jerk	Real		Non-retain	False	False	False	False		Jerk of axis
▼ Modulo	TO_Struct_Modulo		Non-retain	False	False	False	False		Configuration data
Enable	Bool		Non-retain	False	False	False	False		Enable modulo property of axis
StartValue	Real		Non-retain	False	False	False	False		Define start value of modulo area
Length	Real		Non-retain	False	False	False	False		Define length of modulo area
▼ PositionLimits_SW	TO_Struct_PositionLimitsSW		Non-retain	False	False	False	False		Configuration data of software limit switches
Active	Bool		Non-retain	False	False	False	False		Enable software limit switches
MinPosition	Real		Non-retain	False	False	False	False		Position of lower software limit switch
MaxPosition	Real		Non-retain	False	False	False	False		Position of upper software limit switch
▼ PositionLimits_HW	TO_Struct_PositionLimitsHW		Non-retain	False	False	False	False		Configuration data of hardware limit switches
Active	Bool		Non-retain	False	False	False	False		Enable hardware limit switches
MinSwitchLevel	Bool		Non-retain	False	False	False	False		Voltage level at which the lower hardware limit switch reports "approach"
▼ MinSwitchAddress	VREF		Non-retain	False	False	False	False		Input address of lower hardware limit switch
RID	DWord		Non-retain	False	False	False	False		
AREA	Byte		Non-retain	False	False	False	False		
DB_NUMBER	UInt		Non-retain	False	False	False	False		
OFFSET	UDInt		Non-retain	False	False	False	False		
MaxSwitchLevel	Bool		Non-retain	False	False	False	False		Voltage level at which the upper hardware limit switch reports "approach"
▼ MaxSwitchAddress	VREF		Non-retain	False	False	False	False		Input address of upper hardware limit switch
RID	DWord		Non-retain	False	False	False	False		
AREA	Byte		Non-retain	False	False	False	False		
DB_NUMBER	UInt		Non-retain	False	False	False	False		
OFFSET	UDInt		Non-retain	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Homing	TO_Struct_Homing		Non-retain	False	False	False	False		Configuration data for homing
AutoReversal	Bool		Non-retain	False	False	False	False		Enable direction reversal on the hardware limit switch
ApproachDirection	Bool		Non-retain	False	False	False	False		Direction of approach and homing direction of axis
ApproachVelocity	Real		Non-retain	False	False	False	False		Approach velocity of axis
ReferencingVelocity	Real		Non-retain	False	False	False	False		Homing velocity of axis
PositionControl	TO_Struct_PositionControl		Non-retain	False	False	False	False		Configuration data
Kv	Real		Non-retain	False	False	False	False		Gain Kv of position control loop
Kpc	Real		Non-retain	False	False	False	False		Precontrol of position control loop
FollowingError	TO_Struct_FollowingError		Non-retain	False	False	False	False		Configuration data
EnableMonitoring	Bool		Non-retain	False	False	False	False		Enable following error monitoring
MinValue	Real		Non-retain	False	False	False	False		Permitted following error for small velocities
MaxValue	Real		Non-retain	False	False	False	False		Following error for maximum velocity
MinVelocity	Real		Non-retain	False	False	False	False		Velocity as of which the following error is to be adapted dynamically
PositioningMonitoring	TO_Struct_PositioningMonitoring		Non-retain	False	False	False	False		Configuration data
ToleranceTime	Real		Non-retain	False	False	False	False		Tolerance time in which the current position value must reach the positioning window
MinDwellTime	Real		Non-retain	False	False	False	False		Minimum dwell time in positioning window
Window	Real		Non-retain	False	False	False	False		Size of the window in which the current value must be located
StandstillSignal	TO_Struct_StandstillSignal		Non-retain	False	False	False	False		Configuration data
VelocityThreshold	Real		Non-retain	False	False	False	False		Size of the standstill window
MinDwellTime	Real		Non-retain	False	False	False	False		Minimum dwell time in standstill window
Simulation	TO_Struct_Simulation		Non-retain	False	False	False	False		Configuration data
Mode	UDInt		Non-retain	False	False	False	False		Simulation mode
StatusPositioning	TO_Struct_StatusPositioning		Non-retain	False	False	False	False		Current positioning status
Distance	Real		Non-retain	False	False	False	False		Current distance of axis to target position
TargetPosition	Real		Non-retain	False	False	False	False		Target position of axis
FollowingError	Real		Non-retain	False	False	False	False		Current axis following error
StatusDrive	TO_Struct_StatusDrive		Non-retain	False	False	False	False		Status of drive
InOperation	Bool		Non-retain	False	False	False	False		Operational status of the drive
CommunicationOK	Bool		Non-retain	False	False	False	False		Cyclic BUS communication between controller and drive
AdaptionState	DInt		Non-retain	False	False	False	False		Transfer status of the drive
StatusSensor	Array[1..1] of TO_Struct_StatusSensor		Non-retain	False	False	False	False		Status of encoder
StatusSensor[1]	TO_Struct_StatusSensor		Non-retain	False	False	False	False		Status of encoder
State	DInt		Non-retain	False	False	False	False		Status of the encoder value
CommunicationOK	Bool		Non-retain	False	False	False	False		Cyclic BUS communication between controller and encoder
AbsEncoderOffset	Real		Non-retain	False	False	False	False		Home position offset for value of an absolute value encoder
AdaptionState	DInt		Non-retain	False	False	False	False		Tranfer status of the encoder
StatusBits	TO_Struct_StatusBits		Non-retain	False	False	False	False		Status information of axis
Activated	Bool		Non-retain	False	False	False	False		Axis is activated
Enable	Bool		Non-retain	False	False	False	False		Axis is enabled
AxisSimulation	Bool		Non-retain	False	False	False	False		Simulation activated
NonPositionControlled	Bool		Non-retain	False	False	False	False		Position control deactivated
HomingDone	Bool		Non-retain	False	False	False	False		Axis is homed
Done	Bool		Non-retain	False	False	False	False		No Motion Control job is active on the axis

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Error	Bool		Non-retain	False	False	False	False		An error has occurred on the axis
Standstill	Bool		Non-retain	False	False	False	False		Axis is at a standstill
PositioningCommand	Bool		Non-retain	False	False	False	False		Axis executes a positioning job
VelocityCommand	Bool		Non-retain	False	False	False	False		Axis executes a job with velocity specification
HomingCommand	Bool		Non-retain	False	False	False	False		Axis executes a homing job
CommandTableActive	Bool		Non-retain	False	False	False	False		Command table is being processed
ConstantVelocity	Bool		Non-retain	False	False	False	False		Axis traverses with a constant velocity
Accelerating	Bool		Non-retain	False	False	False	False		Axis is accelerating
Decelerating	Bool		Non-retain	False	False	False	False		Axis is decelerating
ControlPanelActive	Bool		Non-retain	False	False	False	False		"Manual control" mode was enabled in the axis control panel
DriveReady	Bool		Non-retain	False	False	False	False		Drive is ready
RestartRequired	Bool		Non-retain	False	False	False	False		Restart required
SWLimitMinActive	Bool		Non-retain	False	False	False	False		Status of lower software limit switch
SWLimitMaxActive	Bool		Non-retain	False	False	False	False		Status of upper software limit switch
HWLimitMinActive	Bool		Non-retain	False	False	False	False		Status of lower hardware limit switch
HWLimitMaxActive	Bool		Non-retain	False	False	False	False		Status of upper hardware limit switch
▼ ErrorBits	TO_Struct_ErrorBits		Non-retain	False	False	False	False		Error information of axis
SystemFault	Bool		Non-retain	False	False	False	False		Internal system error
ConfigFault	Bool		Non-retain	False	False	False	False		Faulty configuration of axis
DriveFault	Bool		Non-retain	False	False	False	False		Drive has displayed an error due to failure of drive-ready signal
SWLimit	Bool		Non-retain	False	False	False	False		Software limit switch approached or overtraveled
HWLimit	Bool		Non-retain	False	False	False	False		Hardware limit switch approached or overtraveled
DirectionFault	Bool		Non-retain	False	False	False	False		Invalid movement direction
HWUsed	Bool		Non-retain	False	False	False	False		Another axis is using the same PTO (Pulse Train Output) and is enabled
SensorFault	Bool		Non-retain	False	False	False	False		Error in encoder system
CommunicationFault	Bool		Non-retain	False	False	False	False		Communication with a connected device is faulty
FollowingError	Bool		Non-retain	False	False	False	False		The maximum permitted following error has been exceeded
PositioningFault	Bool		Non-retain	False	False	False	False		The positioning axis was not positioned correctly at the end of a positioning motion
AdaptionError	Bool		Non-retain	False	False	False	False		The transfer of the drive or encoder parameters failed
▼ ControlPanel	TO_Struct_ControlPanel		Non-retain	False	False	False	False		Parameters of axis control table
▼ Input	TO_Struct_ControlPanelInput		Non-retain	False	False	False	False		Input parameters of axis control panel
TimeOut	DInt		Non-retain	False	False	False	False		Internal parameter; please do not change!
EsLifeSign	DInt		Non-retain	False	False	False	False		Internal parameter; please do not change!
▼ Command	Array[1..1] of TO_Struct_ControlPanelInputCmd		Non-retain	False	False	False	False		Internal parameter; please do not change!
▼ Command[1]	TO_Struct_ControlPanelInputCmd		Non-retain	False	False	False	False		Internal parameter; please do not change!
ReqCounter	DInt		Non-retain	False	False	False	False		Internal parameter; please do not change!
Type	DInt		Non-retain	False	False	False	False		Internal parameter; please do not change!
Position	Real		Non-retain	False	False	False	False		Internal parameter; please do not change!
Velocity	Real		Non-retain	False	False	False	False		Internal parameter; please do not change!
Acceleration	Real		Non-retain	False	False	False	False		Internal parameter; please do not change!
Jerk	Real		Non-retain	False	False	False	False		Internal parameter; please do not change!
Param	DInt		Non-retain	False	False	False	False		Internal parameter; please do not change!

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Output	TO_Struct_ControlPanelOutput		Non-retain	False	False	False	False		Output parameters of axis control panel
RTLifeSign	DInt		Non-retain	False	False	False	False		Internal parameter; please do not change!
Command	Array[1..1] of TO_Struct_ControlPanelOutputCmd		Non-retain	False	False	False	False		Internal parameter; please do not change!
Command[1]	TO_Struct_ControlPanelOutputCmd		Non-retain	False	False	False	False		Internal parameter; please do not change!
AckCounter	DInt		Non-retain	False	False	False	False		Internal parameter; please do not change!
ErrorID	Word		Non-retain	False	False	False	False		Internal parameter; please do not change!
ErrorInfo	Word		Non-retain	False	False	False	False		Internal parameter; please do not change!
Done	Bool		Non-retain	False	False	False	False		Internal parameter; please do not change!
Aborted	Bool		Non-retain	False	False	False	False		Internal parameter; please do not change!
Internal	Array[1..4] of TO_Struct_Internal		Non-retain	False	False	False	False		Parameters for internal use
Internal[1]	TO_Struct_Internal		Non-retain	False	False	False	False		Parameters for internal use
Id	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Value	Real		Non-retain	False	False	False	False		Internal parameter; please do not change!
Internal[2]	TO_Struct_Internal		Non-retain	False	False	False	False		Parameters for internal use
Id	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Value	Real		Non-retain	False	False	False	False		Internal parameter; please do not change!
Internal[3]	TO_Struct_Internal		Non-retain	False	False	False	False		Parameters for internal use
Id	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Value	Real		Non-retain	False	False	False	False		Internal parameter; please do not change!
Internal[4]	TO_Struct_Internal		Non-retain	False	False	False	False		Parameters for internal use
Id	Int		Non-retain	False	False	False	False		Internal parameter; please do not change!
Value	Real		Non-retain	False	False	False	False		Internal parameter; please do not change!
Execute	Bool	false	Non-retain	True	True	True	False		Start command
Position	Real	0.0	Non-retain	True	True	True	False		Absolute target position of axis
Velocity	Real	10.0	Non-retain	True	True	True	False		Velocity of axis
Direction	Int	1	Non-retain	True	True	True	False		Direction specification
Output									
Done	Bool	false	Non-retain	True	True	True	False		Job is completed
Busy	Bool	false	Non-retain	True	True	True	False		Job is being executed
CommandAborted	Bool	false	Non-retain	True	True	True	False		Job was cancelled
Error	Bool	false	Non-retain	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	Non-retain	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	Non-retain	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
Static									
FB_ID	DInt	0	Non-retain	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_MoveAbsolute_DB [DB6]

MC_MoveAbsolute_DB Properties							
General							
Name	MC_MoveAbsolute_DB	**Number**	6	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_MvAbs				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Input									
Axis	TO_Positionin-gAxis		False	False	False	False	False		Used technology object "Axis"
Execute	Bool	false	False	True	True	True	False		Start command
Position	Real	0.0	False	True	True	True	False		Absolute target position of axis
Velocity	Real	10.0	False	True	True	True	False		Velocity of axis
Direction	Int	1	False	True	True	True	False		Direction specification
▼ Output									
Done	Bool	false	False	True	True	True	False		Job is completed
Busy	Bool	false	False	True	True	True	False		Job is being executed
CommandAborted	Bool	false	False	True	True	True	False		Job was cancelled
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_Power_DB_2 [DB9]

MC_Power_DB_2 Properties							
General							
Name	MC_Power_DB_2	**Number**	9	**Type**	DB	**Language**	DB
Numbering	Manual						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Power				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
Axis	TO_Axis		False	False	False	False	False		Used technology object "Axis"
Enable	Bool	false	False	True	True	True	False		Enable axis
StartMode	Int	1	False	True	True	True	False		Start mode on enabling of axis
StopMode	Int	0	False	True	True	True	False		Stop mode when disabling axis
▼ Output									
Status	Bool	false	False	True	True	True	False		Axis is enabled
Busy	Bool	false	False	True	True	True	False		MC_Power is active
Error	Bool	false	False	True	True	True	False		Error at MC_Power or associated technology object
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_Reset_DB_1 [DB10]

MC_Reset_DB_1 Properties							
General							
Name	MC_Reset_DB_1	**Number**	10	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Reset				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Input									
Axis	TO_Axis		False	False	False	False	False		Used technology object "Axis"
Execute	Bool	false	False	True	True	True	False		Start command
Restart	Bool	false	False	True	True	True	False		Execute axis restart
▼ Output									
Done	Bool	false	False	True	True	True	False		Job is completed
Busy	Bool	false	False	True	True	True	False		Job is being executed
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_MoveJog_DB_1 [DB11]

MC_MoveJog_DB_1 Properties							
General							
Name	MC_MoveJog_DB_1	**Number**	11	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_MvJog				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Input									
Axis	TO_SpeedAxis		False	False	False	False	False		Used technology object "Axis"
JogForward	Bool	false	False	True	True	True	False		Jogging in positive direction
JogBackward	Bool	false	False	True	True	True	False		Jogging in negative direction
Velocity	Real	10.0	False	True	True	True	False		Target velocity of axis
PositionControlled	Bool	true	False	True	True	True	False		Position-controlled mode
▼ Output									
InVelocity	Bool	false	False	True	True	True	False		Target velocity of axis was reached
Busy	Bool	false	False	True	True	True	False		Job is being executed
CommandAborted	Bool	false	False	True	True	True	False		Job was cancelled
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_Home_DB_1 [DB12]

MC_Home_DB_1 Properties							
General							
Name	MC_Home_DB_1	**Number**	12	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Home				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
Axis	TO_Axis		False	False	False	False	False		Used technology object "Axis"
Execute	Bool	false	False	True	True	True	False		Start command
Position	Real	0.0	False	True	True	True	False		Reference point position of axis
Mode	Int	0	False	True	True	True	False		Homing mode
▼ Output									
Done	Bool	false	False	True	True	True	False		Job is completed
Busy	Bool	false	False	True	True	True	False		Job is being executed
CommandAborted	Bool	false	False	True	True	True	False		Job was cancelled
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
ReferenceMarkPosition	Real	0.0	False	True	True	True	False		Position at which the technology object was homed
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_MoveAbsolute_DB_1 [DB13]

MC_MoveAbsolute_DB_1 Properties							
General							
Name	MC_MoveAbsolute_DB_1	**Number**	13	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_MvAbs				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
Axis	TO_PositioningAxis		False	False	False	False	False		Used technology object "Axis"
Execute	Bool	false	False	True	True	True	False		Start command
Position	Real	0.0	False	True	True	True	False		Absolute target position of axis
Velocity	Real	10.0	False	True	True	True	False		Velocity of axis
Direction	Int	1	False	True	True	True	False		Direction specification
▼ Output									
Done	Bool	false	False	True	True	True	False		Job is completed
Busy	Bool	false	False	True	True	True	False		Job is being executed
CommandAborted	Bool	false	False	True	True	True	False		Job was cancelled
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_Power_DB_1 [DB14]

MC_Power_DB_1 Properties							
General							
Name	MC_Power_DB_1	**Number**	14	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Power				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
Axis	TO_Axis		False	False	False	False	False		Used technology object "Axis"
Enable	Bool	false	False	True	True	True	False		Enable axis
StartMode	Int	1	False	True	True	True	False		Start mode on enabling of axis
StopMode	Int	0	False	True	True	True	False		Stop mode when disabling axis
▼ Output									
Status	Bool	false	False	True	True	True	False		Axis is enabled
Busy	Bool	false	False	True	True	True	False		MC_Power is active
Error	Bool	false	False	True	True	True	False		Error at MC_Power or associated technology object
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_Reset_DB_2 [DB15]

MC_Reset_DB_2 Properties							
General							
Name	MC_Reset_DB_2	**Number**	15	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Reset				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Input									
Axis	TO_Axis		False	False	False	False	False		Used technology object "Axis"
Execute	Bool	false	False	True	True	True	False		Start command
Restart	Bool	false	False	True	True	True	False		Execute axis restart
▼ Output									
Done	Bool	false	False	True	True	True	False		Job is completed
Busy	Bool	false	False	True	True	True	False		Job is being executed
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_MoveJog_DB_2 [DB16]

MC_MoveJog_DB_2 Properties							
General							
Name	MC_MoveJog_DB_2	**Number**	16	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_MvJog				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Input									
Axis	TO_SpeedAxis		False	False	False	False	False		Used technology object "Axis"
JogForward	Bool	false	False	True	True	True	False		Jogging in positive direction
JogBackward	Bool	false	False	True	True	True	False		Jogging in negative direction
Velocity	Real	10.0	False	True	True	True	False		Target velocity of axis
PositionControlled	Bool	true	False	True	True	True	False		Position-controlled mode
▼ Output									
InVelocity	Bool	false	False	True	True	True	False		Target velocity of axis was reached
Busy	Bool	false	False	True	True	True	False		Job is being executed
CommandAborted	Bool	false	False	True	True	True	False		Job was cancelled
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_Home_DB_2 [DB17]

MC_Home_DB_2 Properties							
General							
Name	MC_Home_DB_2	**Number**	17	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_Home				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Input									
Axis	TO_Axis		False	False	False	False	False		Used technology object "Axis"
Execute	Bool	false	False	True	True	True	False		Start command
Position	Real	0.0	False	True	True	True	False		Reference point position of axis
Mode	Int	0	False	True	True	True	False		Homing mode
▼ Output									
Done	Bool	false	False	True	True	True	False		Job is completed
Busy	Bool	false	False	True	True	True	False		Job is being executed
CommandAborted	Bool	false	False	True	True	True	False		Job was cancelled
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
ReferenceMarkPosition	Real	0.0	False	True	True	True	False		Position at which the technology ob-ject was homed
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!

Program blocks / System blocks / Program resources

MC_MoveAbsolute_DB_2 [DB18]

MC_MoveAbsolute_DB_2 Properties							
General							
Name	MC_MoveAbsolute_DB_2	**Number**	18	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	SIMATIC	**Comment**		**Family**	BasicMC
Version	7.0	**User-defined ID**	MC_MvAbs				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
Axis	TO_PositioningAxis		False	False	False	False	False		Used technology object "Axis"
Execute	Bool	false	False	True	True	True	False		Start command
Position	Real	0.0	False	True	True	True	False		Absolute target position of axis
Velocity	Real	10.0	False	True	True	True	False		Velocity of axis
Direction	Int	1	False	True	True	True	False		Direction specification
▼ Output									
Done	Bool	false	False	True	True	True	False		Job is completed
Busy	Bool	false	False	True	True	True	False		Job is being executed
CommandAborted	Bool	false	False	True	True	True	False		Job was cancelled
Error	Bool	false	False	True	True	True	False		Error during execution of the job
ErrorID	Word	16#0	False	True	True	True	False		Error ID for parameter "Error"
ErrorInfo	Word	16#0	False	True	True	True	False		Error info ID for parameter "ErrorID"
InOut									
▼ Static									
FB_ID	DInt	0	False	False	False	False	False		Internal parameter; please do not change!