


Main Features

- Excellent gain value for good coverage
- 2x2 MIMO application
- Low VSWR
- Low PIM, high reliability
- High power handling
- Compact design for easy installation
- Customized connector is available

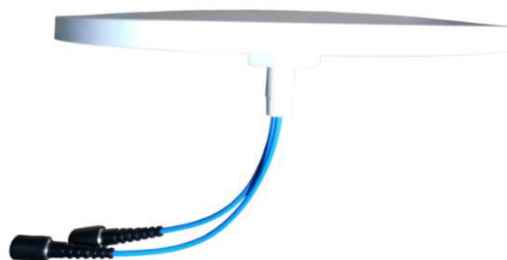

Electrical Specifications

Items	Value				
Frequency (MHz)	2x (698-960/1350-2700/3400-4000)				
Sub-band (MHz)	698-806	806-960	1350-1710	1710-2700	3400-4000
Gain (dBi)	1.5±0.5	2.2±0.5	3.5±0.5	4.5±1.0	6.0±1.0
Horizontal Beam width (°)	360	360	360	360	360
Vertical 3dB Beam width (°)	75±15	60±15	55±15	40±15	30±10
VSWR	≤1.8	≤1.8	≤1.8	≤1.8	≤1.8
Isolation (dB)	≥16	≥16	≥16	≥20	≥20
Polarization	Linear Horizontal				
Power handling	100W				
Intermodulation (3rd order)	≤-153dBc@2x43dBm				
Impedance	50Ω				



Environmental Specifications

Items	Value
Operating temperature range	-45°C to +55°C
Storage temperature range	-55°C to +85°C
Relative humidity	5%- 95%
Barometric pressure	55KPa -106KPa
Applications	Indoor (IP54)

Mechanical Specifications

Items	Value
Dimension	Φ266×18 (mm)
Weight	500g
Connectors type	2×N female
Mounting	Ceiling mounting
Packing	1Pcs in box

Patterns

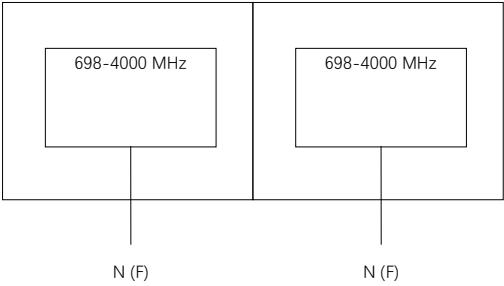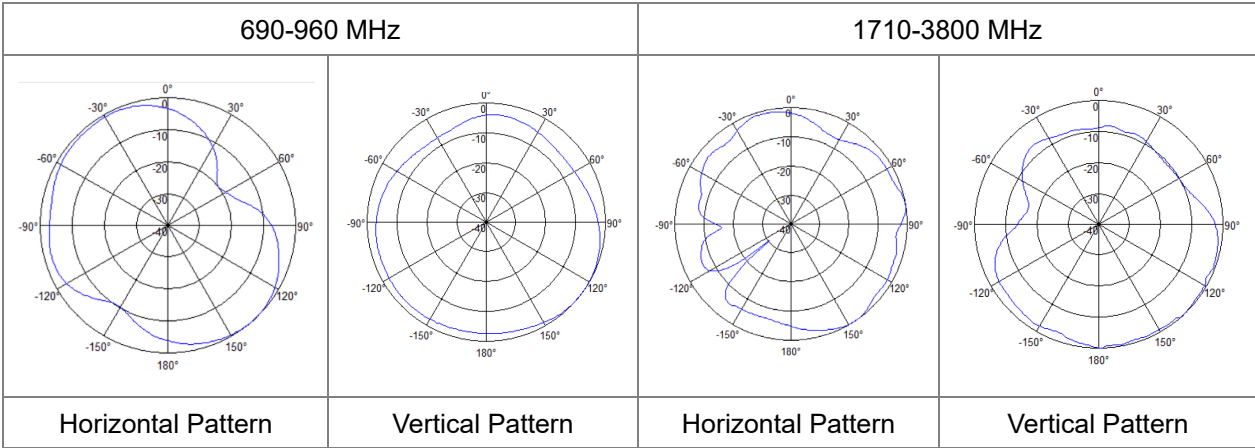

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.