

698-4000MHz MIMO Indoor Panel Antenna

S-Wave 0640/0640-65-9D-O7

PROSE

Main Features

- Ultra-wideband Panel MIMO Antenna
- Indoor GSM, DCS, WCDMA and LTE coverage
- Vertical and Horizontal Polarization
- Wall Mounting Installation
- Excellent PIM Performance



Electrical Specifications

Items	Value				
Frequency (MHz)	2× (698-960&1350-2170&2200-2700&3400-4000)				
Sub-band (MHz)	698-806	806-960	1350-2170	2200-2700	3400-4000
Gain (dBi)	5±0.5	6±0.5	7±0.5	7.5±0.5	7.5±0.5
Horizontal 3dB Beam width (°)	85 ±10	75 ±10	60 ±10	55 ±10	30 ±10
Vertical 3dB Beamwidth (°)	75 ±10	75 ±10	60 ±10	53 ±10	30 ±10
VSWR	≤2.0	≤2.0	≤2.0	≤2.0	≤2.0
Isolation (dB)	≥16	≥16	≥20	≥20	≥20
Polarization	Vertical and horizontal				
Power handling	50W				
Intermodulation (3rd order)	≤-153dBc@2x43dBm				
Impedance	50Ω				

Environmental Specifications

Items	Value
Operating temperature range	-30°C to +55°C
Storage temperature range	-40°C to +85°C
Relative humidity	0%- 95%
Barometric pressure	55KPa -106KPa
Applications	Indoor



Mechanical Specifications

698-4000MHz MIMO Indoor Panel Antenna
S-Wave 0640/0640-65-9D-O7



Items	Value
Dimension	400 x 180 x 62 mm
Weight	1.2kg
Pigtail length	300mm
Connectors type	2x N female
Radome Material	PVC
Packing	1Pcs in box

Patterns

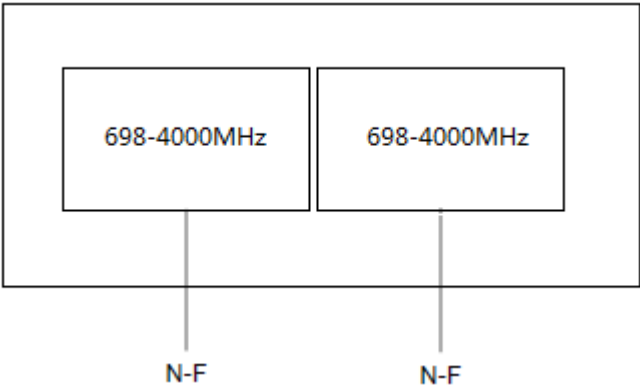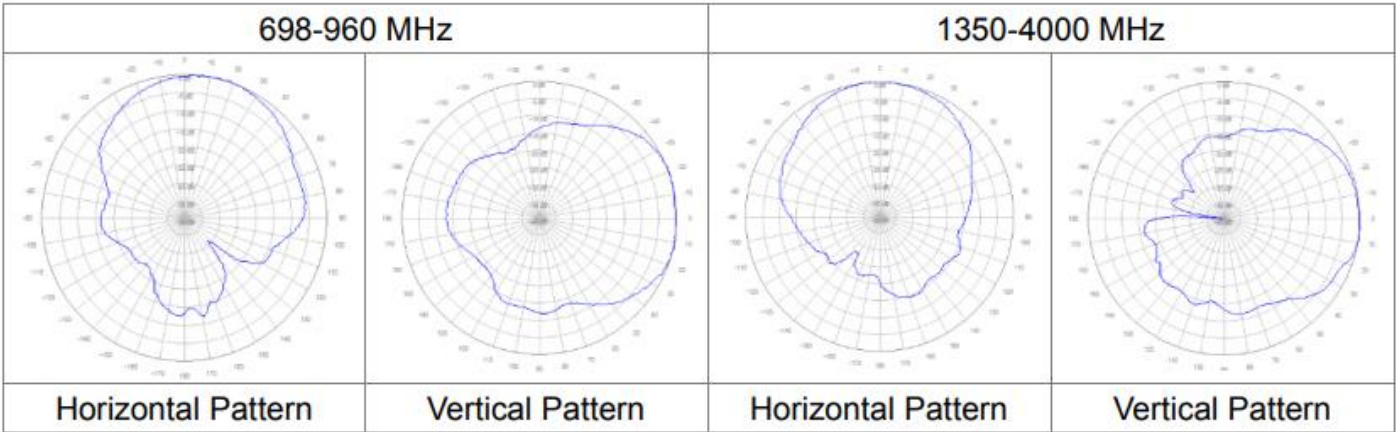

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.