

- The ORU-46-Q77M4-N-64F-D-01 is an outdoor remote radio unit. It is the radio frequency (RF) part of a distributed base station and can be located near antennas.
- Adopting an innovative design, ORU-46-Q77M4-N-64F-D-01 is able to work in 4 TX and 4 RX mode and therefore supports higher output power and larger carrier capacity.



Electrical Data


		Uplink	Downlink
Frequency	N77 (4x4 MIMO)	3800 - 4200 MHz	3800 - 4200 MHz
Instantaneous bandwidth		400 MHz	400 MHz
Operation bandwidth		100 MHz	100 MHz
Mode		NR	
RF Output Power		4x40W	
Power supply		-48V DC(-36V~-57V)	
ORAN Split option		Split option 8	
Quantity of SFP ports for Front Haul		2	
Data rate of Front Haul		Max. 10.1376Gbps	
Noise Figure(typical)		<3dB	
Power Consumption (DL:UL 75:25)		< 530W@100% load	
3GPP Compliant		TS38.104, TS38.141	

Environmental Data

Operating temperature	-40°C to +55°C (without solar radiation) , -40°C to +50°C (with solar radiation)
Relative humidity	5% RH to 100% RH
Absolute humidity	1 g/m3 to 30 g/m3
Atmospheric pressure	70 kPa to 106 kPa
Shockproof protection	NEBS GR63 zone4
Ingress Protection (IP) rating	IP65

Mechanical Data

Size	400x330x100(mm)
Volume	13.2L
Weight	15kg
RF connectors	4x4.3-10 Female

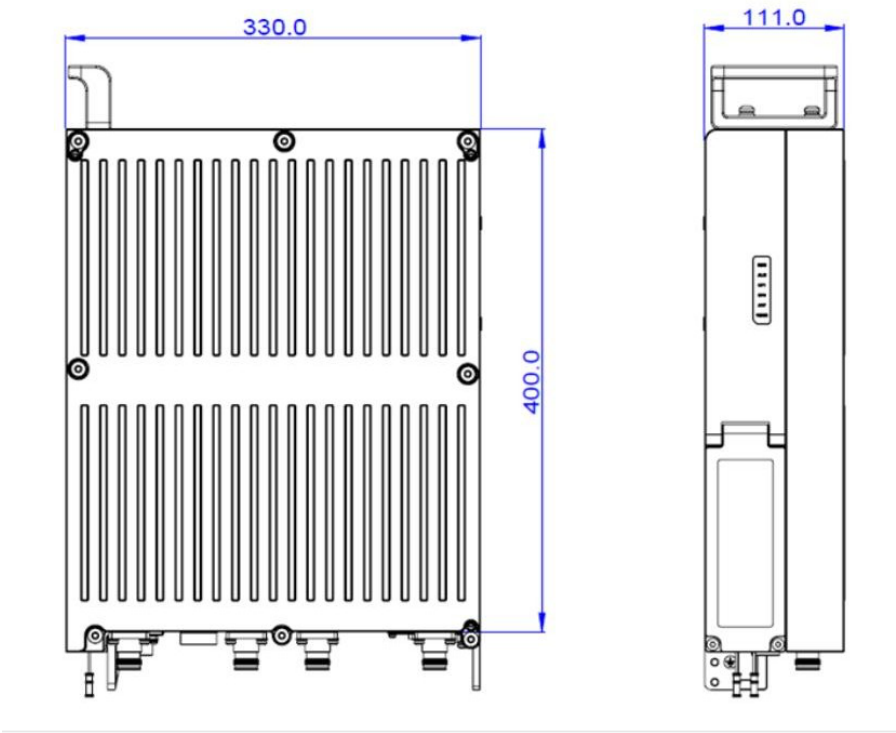

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.