


**DG126-5.0**

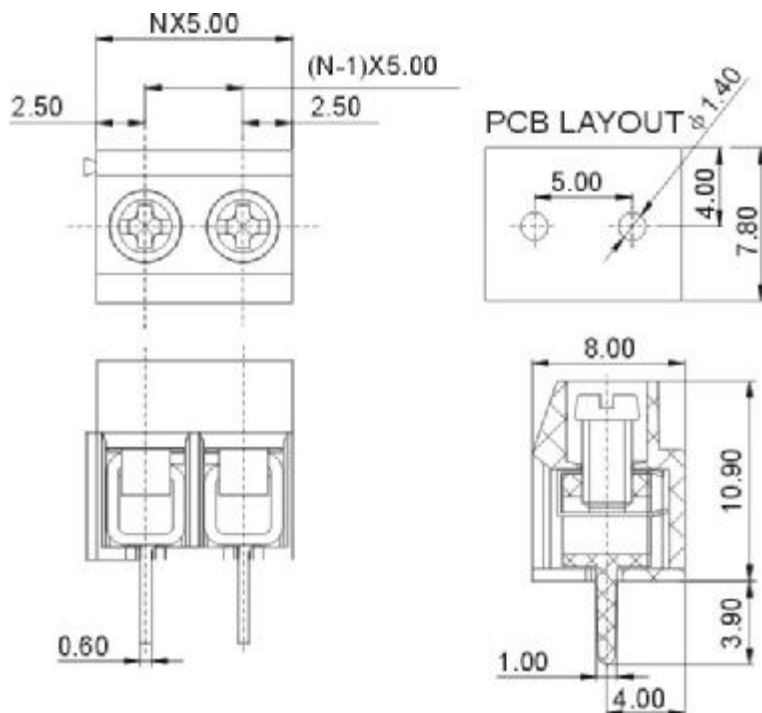

APPROVAL	UL	VDE
Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	18A
Wire range	26-14AWG	0.5-2.5mm <sup>2</sup>
Withstanding voltage	AC2000V/1Min	

Mechanical	
torque	0.4Nm(3.5Lb-In)
Ambient temperature	-40°C ~ +105 °C
Strip length	6-7mm
Dimensions	
pitch	5.0mm(.197" )
Poles	2P,3P-24P

Material	
Housing	PA66,UL94V-0
Screws	M2.5,steel, Cr <sup>3+</sup> Znplated
Pin header	Brass,Tin plated
Wire guard	Stainless steel

### HOW TO ORDER :

	-			P	-	1		-	X	X	X
									Customer Request		
Series number		No. of pole							Color		
									1 Grey	4 Green	7 Trans Parent
									2 Blue	5 Orange	8 Yellow
									3 Black	6 Red	9 White

mm (INCH)	DEGSON	DEGSON ELECTRONICS CO., LTD.
THROANGLE PROJECTION	NAME	DG126-5.0