


HIGH TORQUE HYBRID STEPPING MOTOR SPECIFICATIONS

General specifications		Electrical specifications	
Step Angle (°)	1.8	Rated Voltage (V)	4
Temperature Rise (°C)	80 Max (rated current, 2 phase on)	Rated Current (A)	1.2
Ambient temperature (°C)	-20~+50	Resistance Per Phase ($\pm 10\%$)	3.3 (25°C)
Number of Phase	2	Inductance Per Phase ($\pm 20\%$ mH)	2.8
Insulation Resistance	100M Ω , Min (500VDC)	Holding Torque (Kg.cm)	3.17
Insulation Class	Class B	Detent Torque (g.cm)	200
Max. radial force (N)	28 (20mm from the flange)	Rotor Inertia (g.cm ²)	68
Max. axial force (N)	10	Weight (Kg)	0.365



● Pull out torque curve:

VOLTAGE: 28VDC, CONSTANT CURRENT: 1.2A, HALF STEP

● Wiring Diagram:



● Dimensions: (unit=mm)

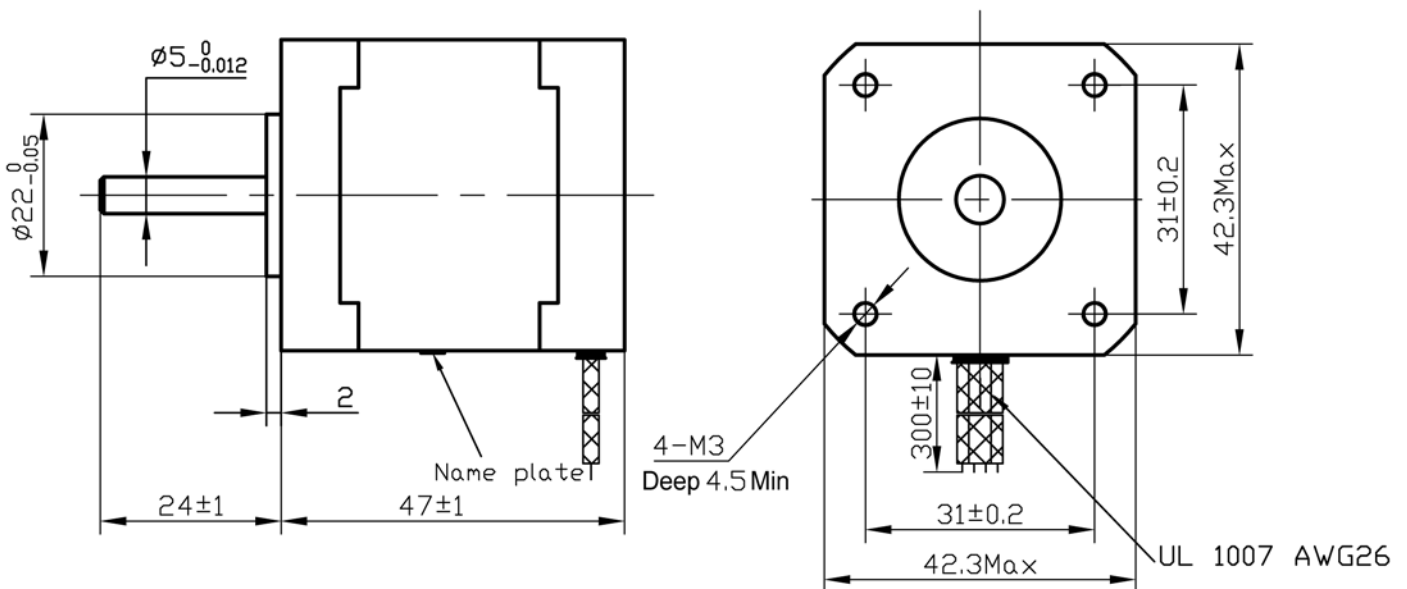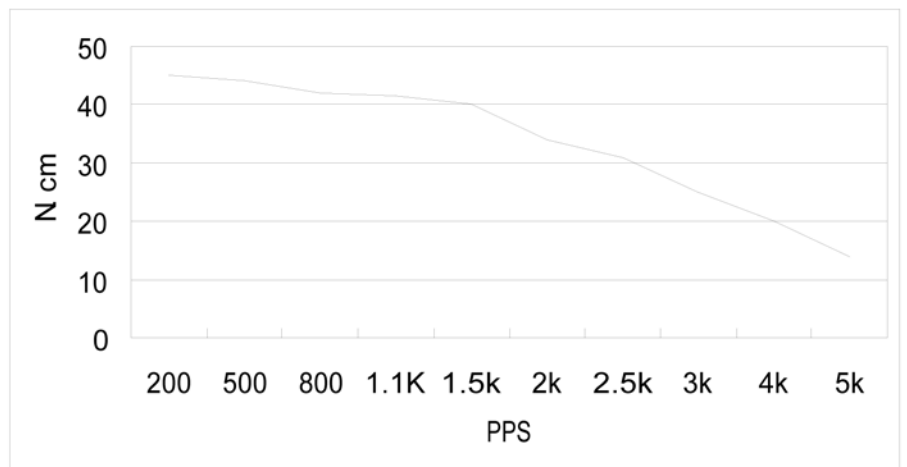

					SY42STH47-1206A	<div>Unit 1 Sovereign Business Park, Willis Way, Poole, Dorset, United Kingdom BH15 3TB www.zappautomation.com enquiries@zappautomation.com</div>
						
REV	REVISIONS	DESCRIPTION	BY	DATE		
DRAW						
CHECK						
APPROVE						