


Fixing pattern



Notes:

- IP rating: IP65
- max load on the end strokes: 50daN on the top of the handle
- operating temp range: -10°C ; $+60^{\circ}\text{C}$
- supply: 4,8V - 5,2V
- output: 0,5V - 4,5V at 5V (ratiometric)
- max output 2mA
- reverse battery and short circuit protected

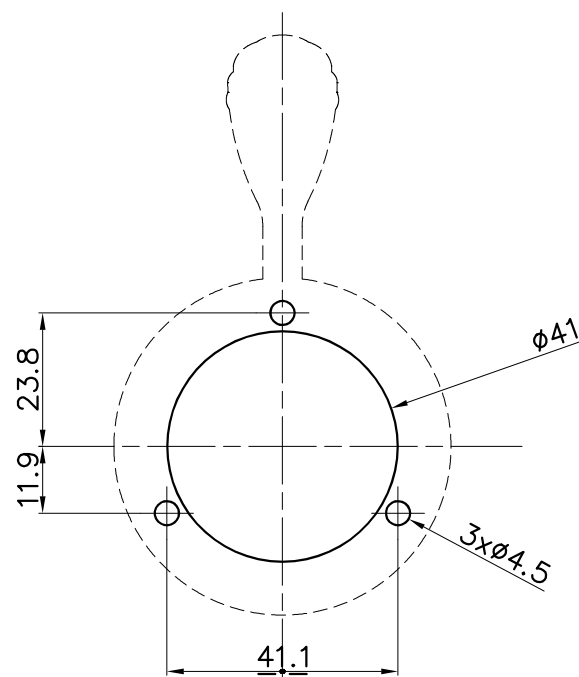

.
.
.
M VISTO Descrizione (Dis, data) - Description (Designer, data)					
Sono vietate correzioni o modifiche manuali. Manual modifications are forbidden.			Quote senza tolleranze: UNI2768-m Quotes without tolerances: UNI2768-m		
Dimensione/Dimension [mm]	0.5÷6	6÷30	30÷120	120÷400	400÷1000
Tolleranza/Tolerance \pm [mm]	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8
Codice cliente/Customer's code	Materiale/Material			Normativa/Regulation	
Codice/Code 4103.E-L0100010	Finitura, trattamenti/Finishing, threatment			Normativa/Regulation	
Disegno/Drawing 1402/2d/4103.E_L0100010	Materiale grezzo/Raw material			Peso/Weight	Stampo/Tool
Revisione/Revision	Descrizione/Description Control 4103 CCW				
Disegnatore/Designer Raffaldi	Visto/Checked	Rugosità/Roughness \sqrt{Ra} ()			
Scala/Scale 1:1	Data/Date 17/02/23	Foglio/Paper A2			
Prodotto/Product	Q.tà/Q.ty				