
FİTA TEKNİK

1952'den Beri / *Since 1952*

SU SOĞUTMA GRUPLARI / CHILLERS

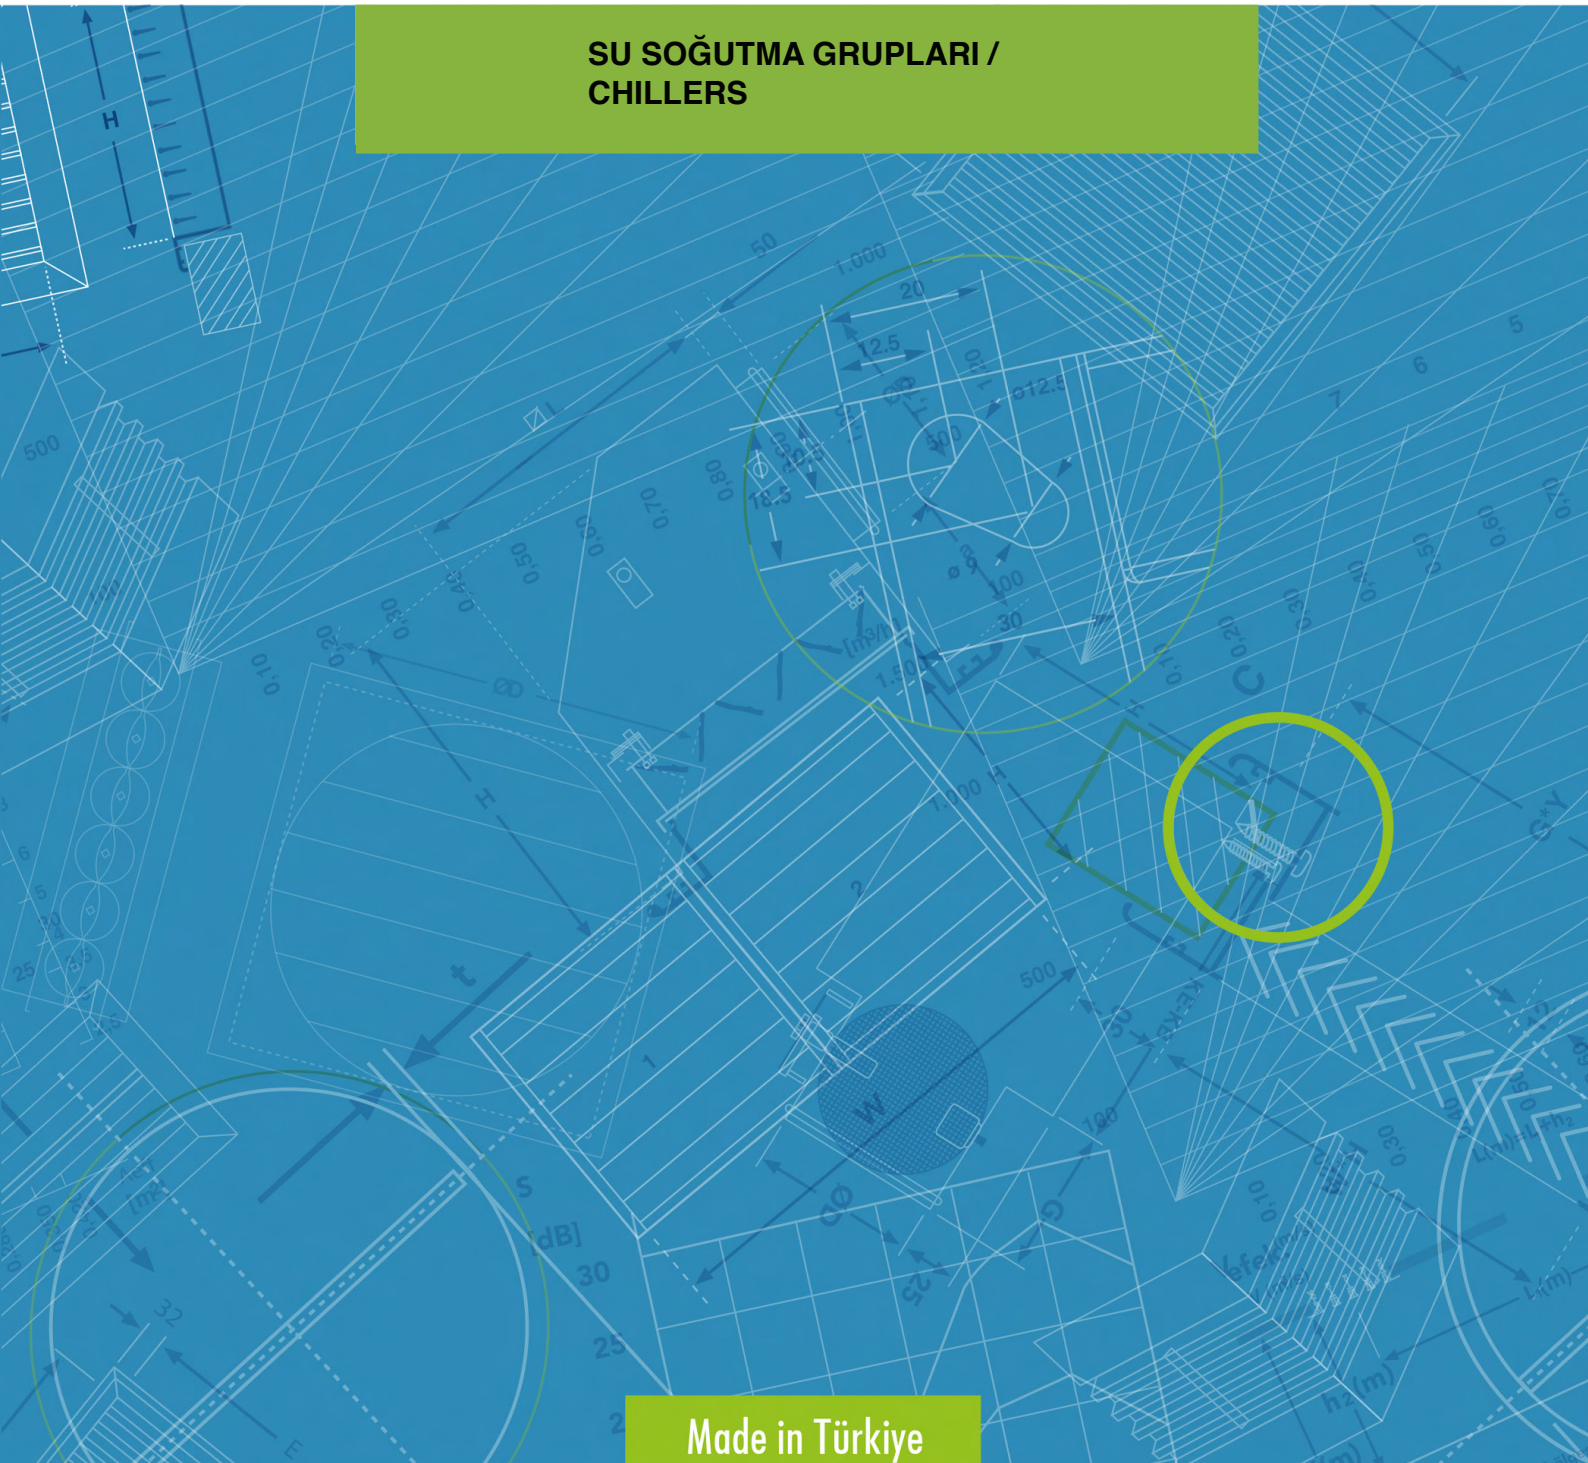

Made in Türkiye

Products

Air Cooled Chillers





Water Cooled Chillers



Condenserless Chillers



Condensing Units













Heat Pumps



Remote Condenser



Special Solutions



Enthalpy Selection Tool



Enthalpy Test Rooms



Air Cooled Chillers & Heat Pumps

Model	Picture	Compressor Type	Refrigerant	Capacity (kW) 250	500	1000	1500	2000	2600
EAS		Scroll Compressor(s)	R410A	81-1152					
				79-948					
			R454B	76-940					
EAS.HK		Scroll Compressor(s)	R410A	2,5-256					
				2-217					
			R454B	19-205					
EAS.VI+1		Scroll Compressor(s)	R410A	71-871					
			R454B	68-722					
EAW		Screw Compressor(s)	R134A	496-2245					
			R513A	479-1981					
EAW.VI+1		Screw Compressor(s)	R134A	353-1624					
			R513A	350-1572					

Cooling Capacity in kW Heating Capacity in kW

Model	Picture	Compressor Type	Refrigerant	Capacity (RT) 100	200	300	400	500	700
EAS		Scroll Compressor(s)	R410A	23-327					
				22-269					
			R454B	21-267					
EAS.HK		Scroll Compressor(s)	R410A	0,7-72					
				0,8-62					
			R454B	5,4-58					
EAS.VI+1		Scroll Compressor(s)	R134A	20-247					
			R513A	19-205					
EAW		Screw Compressor(s)	R134A	141-638					
			R513A	136-563					
EAW.VI+1		Screw Compressor(s)	R134A	100-461					
			R513A	99-446					

Cooling Capacity in RT Heating Capacity in RT

Data calculated in compliance with Standard EN 14511:2022 referred to the following conditions: Internal exchanger water temperature = 12/7°C; Outdoor heat exchanger inlet air temperature = 35°C
Data calculated in compliance with Standard EN 14511:2022 referred to the following conditions: Internal exchanger water temperature = 40/45°C; Outdoor heat exchanger inlet air temperature 7 D.B. /6 (°C) W.B

Free Cooling Chillers

Model	Picture	Compressor Type	Refrigerant	Capacity (kW)
				50 · 500 · 1000 · 1500 · 2000 · 2600
EAS.FC		Scroll Compressor(s)	R410A	78-1152
			R454B	77-930
EAW.FC		Screw Compressor(s)	R134A	488-2245
			R513A	479-1948
EAW.DC.FC.VI+1		Screw Compressor(s)	R134A	331-1557
			R513A	330-1620

Cooling Capacity in kW

Model	Picture	Compressor Type	Refrigerant	Capacity (RT)
				100 · 200 · 300 · 400 · 500 · 700
EAS.FC		Scroll Compressor(s)	R410A	22-327
			R454B	22-264
EAW.FC		Screw Compressor(s)	R134A	139-638
			R513A	136-553
EAW.DC.FC.VI+1		Screw Compressor(s)	R134A	94-442
			R513A	94-460

Cooling Capacity in RT

Data calculated in compliance with Standard EN 14511:2022 referred to the following conditions: Internal exchanger water temperature = 12/7°C; Outdoor heat exchanger inlet air temperature = 35°C

Condenserless Chillers

Model	Picture	Compressor Type	Refrigerant	Capacity (kW)
				50 · 500 · 1000 · 1500 · 2000 · 2600
EAS.CC		Scroll Compressor(s)	R410A	82-1152
			R454B	78-952
EAW.CC		Screw Compressor(s)	R134A	519-2344
			R513A	502-2078

Cooling Capacity in kW

Model	Picture	Compressor Type	Refrigerant	Capacity (RT)
				50 · 150 · 300 · 450 · 600 · 750
EAS.CC		Scroll Compressor(s)	R410A	23-327
			R454B	22-270
EAW.CC		Screw Compressor(s)	R134A	147-666
			R513A	143-590

Cooling Capacity in RT

Data calculated in compliance with Standard EN 14511:2022 referred to the following conditions: Internal exchanger water temperature = 12/7°C; Outdoor heat exchanger inlet air temperature = 35°C

Remote Condenser

Model	Picture	Compressor Type	Refrigerant	Capacity (kW)					
				50	500	1000	1500	2000	2600
COR		-	R410A	80-1836					

Cooling Capacity in kW

Model	Picture	Compressor Type	Refrigerant	Capacity (RT)					
				50	150	300	450	600	750
COR		-	R410A	22-522					

Cooling Capacity in RT

Condensing Unit

Model	Picture	Compressor Type	Refrigerant	Capacity (kW)					
				50	500	1000	1500	2000	2600
CUA		-	R410A	10-1234					

Cooling Capacity in kW

Model	Picture	Compressor Type	Refrigerant	Capacity (RT)					
				50	150	300	450	600	750
CUA		-	R410A	2,8-350					

Cooling Capacity in RT

Data calculated in compliance with Standard EN 14511:2022 referred to the following conditions: Internal exchanger water temperature = 12/7°C; Outdoor heat exchanger inlet air temperature = 35°C

Water Cooled Chillers

Model	Picture	Compressor Type	Refrigerant	Capacity (kW)
				50 500 1000 1500 2000 2600
EWS		Scroll Compressor(s)	R410A	46-1255
			R454B	43-1023
EWS.HK		Scroll Compressor(s)	R410A	10-172
			R454B	21-140
EWS.VI+1		Scroll Compressor(s)	R410A	78-392
			R454B	74-330
EWW		Screw Compressor(s)	R134A	592-2539
			R513A	547-2259
EWW.VI+1		Screw Compressor(s)	R134A	405-1831
			R513A	407-1805

Cooling Capacity in kW

Model	Picture	Compressor Type	Refrigerant	Capacity (RT)
				50 150 300 450 600 750
EWS		Scroll Compressor(s)	R410A	13-356
			R454B	12-291
EWS.HK		Scroll Compressor(s)	R410A	2,8-49
			R454B	6-40
EWS.VI+1		Scroll Compressor(s)	R410A	22-111
			R454B	21-94
EWW		Screw Compressor(s)	R134A	168-721
			R513A	155-642
EWW.VI+1		Screw Compressor(s)	R134A	115-520
			R513A	115-512

Cooling Capacity in ton

Dry Cooler

Model	Picture	Compressor Type	Refrigerant	Capacity (kW)					
				50	500	1000	1500	2000	2600
ER.FCV		-	Water		146-1606				

Cooling Capacity in kW

Model	Picture	Compressor Type	Refrigerant	Capacity (RT)					
				50	150	300	450	600	750
ER.FCV		-	Water		41-456				

Cooling Capacity in RT

Mold Temperature Unit

Model	Picture	Compressor Type	Refrigerant	Capacity (kW)					
				5	15	30	45	60	75
KSI		-	-		6-24		26-70		

Cooling Capacity in kW Heating Capacity in kW

Model	Picture	Compressor Type	Refrigerant	Capacity (RT)					
				5	10	15	20	25	30
KSI		-	-	1,7-6,8		7,3-19,9			

Cooling Capacity in RT Heating Capacity in RT

Film Inflation Cooler

Model	Picture	Compressor Type	Refrigerant	Capacity (kW)					
				5	10	20	30	40	50
ER.IC		-	Water				16-48		

Cooling Capacity in kW

Model	Picture	Compressor Type	Refrigerant	Capacity (RT)					
				5	10	15	30	35	40
ER.IC		-	Water		4,5-13				

Cooling Capacity in RT

Laser Chiller

Model	Picture	Compressor Type	Refrigerant	Capacity (kW)					
				5	15	30	45	60	75
LSR		-	R410A			14-72			

Cooling Capacity in kW

Model	Picture	Compressor Type	Refrigerant	Capacity (RT)					
				5	10	15	20	25	30
LSR		-	R410A		4-20				

Cooling Capacity in RT

For Cooling Ambient: +35°C - Water Inlet/Outlet: +12°/+7°C

İLETİŞİM / CONTACT

Office Adress: Şenlikköy Mahallesi, Florya Caddesi, Florya Konakları, B Blok, Daire: 3, **Bakırköy, İstanbul, Türkiye**

Factory 1: Fener Mah . Gökun Cad. No: 9 34582
Silivri, İstanbul, Türkiye

Telephone: +90 212 641 00 21
+90 212 641 08 50

Web: www.fitateknik.com

E-mail: info@fitateknik.com
export@fitateknik.com

