


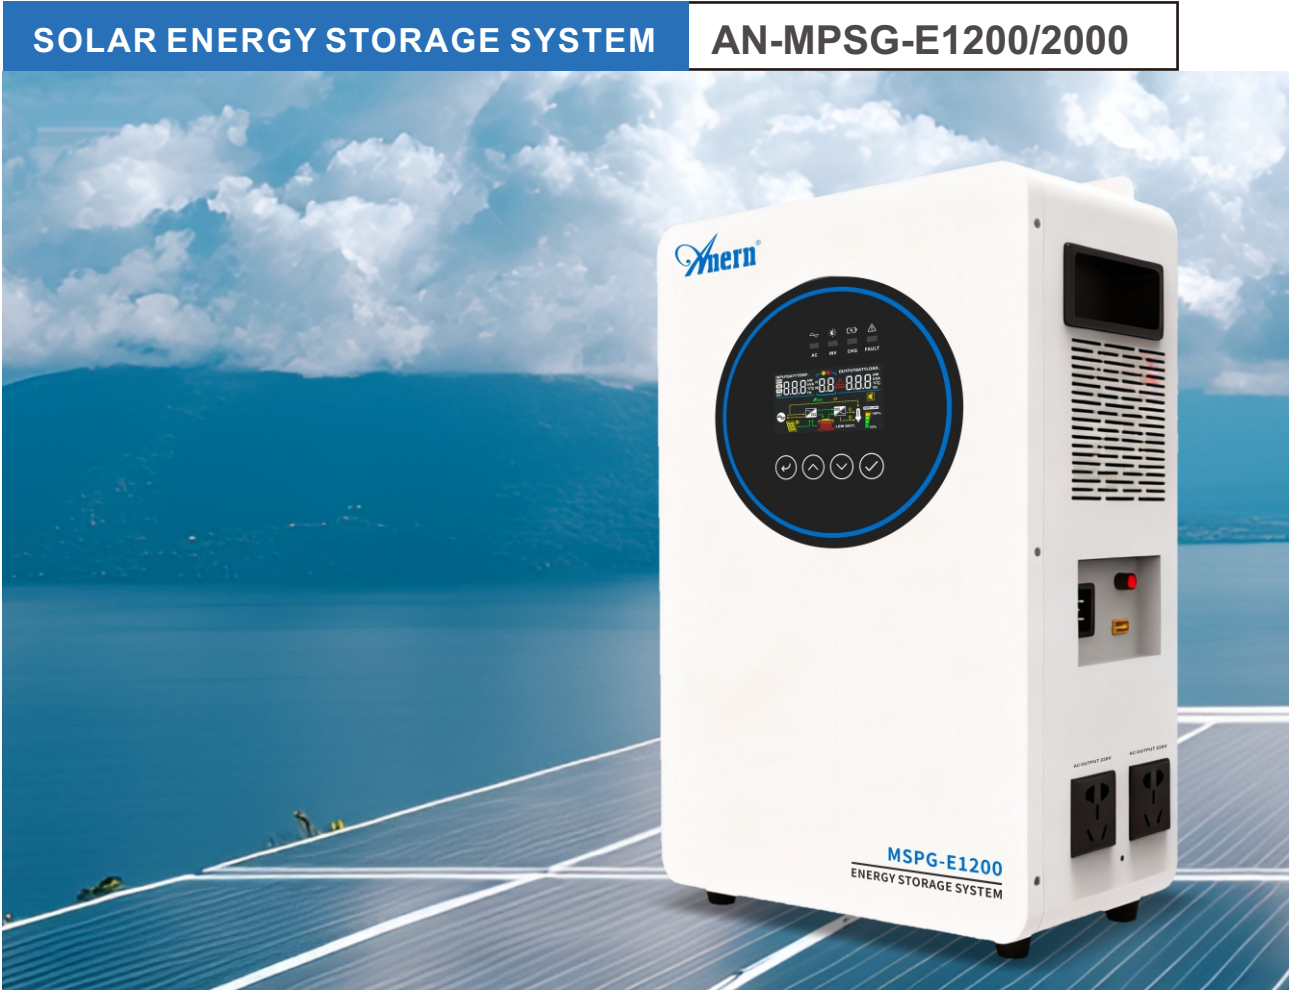

»» Features

- Pure Sine Wave Solar Inverter;
- Built-in A Grade LiFePo4 lithium battery;
- Convenient and practical 5VDC-USB output port and 12VDC output port;
- Built-in MPPT solar controller, max charge current 100A (PV+AC);
- Wide PV input voltage range;
- Built-in anti-dusk kit for harsh environment;
- Smart battery charge design to maximize battery lifespan;
- Wall mounted and floor mounted installation for optional

MODEL	AN-MPSG-E1200	AN-MPSG-E2000
Rated Output Power	1200W	2000W
Battery Capacity	1280WH	2560WH
AC Input		
Rated Input Voltage	208/220/230/240VAC; L+N+PE	
Voltage Range	90-280VAC(APP mode); 170~280VAC(UPS mode)	
Frequency	50/60Hz(Auto Adaptive)	
AC Output		
Rated Capacity	1.2KW (Output Power rating will be reduced to 90%, when setting the Output Voltage to 208V)	
Surge Power	2.4kVA	
Voltage	208/220/230/240	
Power Factor	1PF	
Frequency	50/60Hz±0.1%	
Switch Time	10ms (APP/UPS/GEN mode)	
Wave Form	Pure SineWave	
Overload Capacity (Battery Mode)	60s@102%~110%load; 10s@120%~200%load	
Maximum Efficiency(Battery Mode)	90%12VDC	
PV/AC CHARGER		
Solar Charger Type	MPPT	
Maximum PV Input Current/Power	18A/800W	18A/3000W
MPPT Range@Operating Voltage	17~115VDC	30~400VDC
PV Start-up Voltage	20VDC	40VDC
Maximum PV Open Circuit Voltage	115VDC	450VDC
Maximum PV Charge Current	50A	100A
Maximum AC Charge Current	50A	100A
Maximum Charge Current (PV+AC)	100A	100A
BATTERY		
Normal Voltage	12V	
Battery Type	LiFePO4 12.8V	
Capacity	100Ah	200Ah
Charging Current	≤50A	
Discharging Current	≤100A	
Charging Temperature	0°C~55°C	
Discharging Temperature	-20°C~60°C	
Storage Temperature	-30°C~60°C	
PHYSICAL		
Dimension, D xWx H(mm)	465x305x160mm	545x356x211mm
GENERAL DATA		
HMI	LCD	
Communication Port	Rs232	
Monitoring	NA	
USB Output	5V/2A x4	
DC Output	12V/2.5A x4	

PORTABLE SOLAR GENERATOR

AN-MPSG-N



»» Features

- Dual CPU intelligent control with excellent performance technology
- Built-in LiFePo4 lithium battery
- The mains supply mode/energy-saving mode/battery mode can be set flexibly
- Convenient and practical 5VDC-USB output port and 12VDC output port
- MPPT controller greatly improving the charging efficiency to more than 20%
- Overcharge and overdischarge protections to get a longer battery life
- Safe and reliable intelligent exhaust fan control
- Overall automatic protections and alarms including AC output overload protection, short circuit protection, etc

Model	MPSG-N500	MPSG-N1000	MPSG-N2000	MPSG-N3000	MPSG-N5000
Battery Voltage	12.8V	25.6V	25.6V	25.6V	48V
Inverter					
Rated Power	500W	1000W	2000W	3000W	5000W
Input Voltage Range	110/220VAC±10%				
Input Frequency	45-65Hz				
Output Voltage	110/120/220/240VAC(optional)				
Output Frequency	50/60Hz				
Output Wave	Pure Sine Wave				
Specification Of Built-in Lithium Battery	600WH	1200WH	2500WH	3000WH	5000WH
Communication	RS485/WIFI(optional)				
Solar Input					
Max.PV Power	240W	480W	800W	1500W	3000W
Range Of Charging Voltage	15-90VDC	30-90VDC	30-90VDC	30-130VDC	60-160VDC
Rated Charge Current	20A		30A	60A	
DC Output					
5VDC USB Output	2 units / MAX2A				
12VDC Output Ports	2 units/ MAX2A				
Physical					
Transfer Time	Typical: 5-8ms(Including detection time)				
Heat Dissipation/Cooling	Temperature control by intelligent exhaust fan				
Display	Digital LCD				
Electricity Charging	Yes				
Operating Temperature	-10°C-+50°C				
Operating Humidity	10%-90%				
Short Circuit Protection	Software Protection				
External Size(mm)	410*210*300	410*210*385	460*275*495	460*275*495	550*300*600
Package Size(mm)	458*258*348	458*258*433	495*290*640	495*290*640	585*315*760
G.W.(Gross Weight)	18kg	27kg	50kg	59kg	90kg

