

PORTABLE POWER STATION

pecron




Company Profile

Founded in 2012, with headquarter located in Shenzhen, PECRON is specializing in the business of portable power station and offering outdoor & indoor energy solutions.

PECRON, is an origianl factory, designing, producing and selling products worldwide. With more than ten years of R&D experience and expertise in the field of high-quality portable energy storage, PECRON has developed a number of advanced technologies in this field and has become one of the leading contributors in the business.



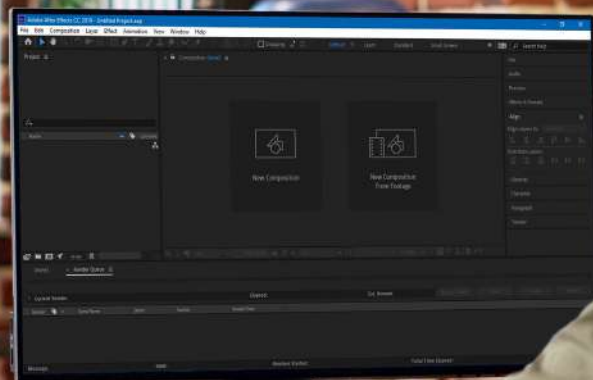





Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR

E300 LFP

288Wh 600W



Capacity

288Wh (19.2V/15Ah)



Battery Type

LiFePO4 (3500+ Cycles to 80%)



AC Input

300W Max



Solar Input

Voc 12Vdc~28Vdc, 100W Max, 7A Max



Car Input

12Vdc/28Vdc, 100W Max



USB-C Input

100W Max



UPS Power

600W Max



Charging time

1.3 Hour



AC Output

600W Max



DC 12V Output

12V/10A Max



DC 24V Output

24V/5A Max



USB-C Output

5V,9V,12V,20V/100W



USB-A Output

5V,9V,12V / 18W Max*2



Wireless Charging Pad Output

15W Max*1



Weight

About 4.8KG / 10.5lbs



Size

L254xW172xH154mm / L10xW6.8xH6.1in



Discharge Temperature

-20°C~45°C / -4°F-113°F



APP networking control



pecron

pecron E500



Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR

E500 LFP

576Wh 600W



Capacity

576Wh (19.2V/30Ah)



Battery Type

LiFePO4 (3500+ Cycles to 80%)



AC Input

500W Max



Solar Input

Voc 12Vdc~28Vdc, 100W Max, 7A Max



Car Input

12Vdc/24Vdc, 100W Max



USB-C Input

100W Max



UPS Power

600W Max



Charging time

1.5 Hour



AC Output

600W Max



DC 12V Output

12V10A*1/12V5A*1



DC 24V Output

24V/5A Max



USB-C Output

5V,9V,12V,20V/100W



USB-A Output

5V,9V,12V / 18W Max*2



Wireless Charging Pad Output

15W Max*1



Weight

About 6.75KG / 14lbs



Size

L252xW170xH187mm / L10xW6.7xH7.3in



Discharge Temperature

-20°C~45°C / -4°F~113°F



APP networking control



LED Lighting lamp





E1000 LFP

1024Wh 1800W

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR



Capacity

1024Wh (51.2V/20Ah)



Battery Type

LiFePO4 (3500+ Cycles to 80%)



AC Input

1000W Max



Solar Input

Voc 11Vdc~60Vdc, 600W Max, 20A Max



Car Input

11Vdc~60Vdc, 600W Max



UPS Power

1800W Max



Charging time

1.3 Hour



AC Output

1800W Max



DC Output

12V20A*1/12V10A*1/12V5A*1



USB-C Output

5V,9V,12V,20V,100W Max*2



USB-A Output

5V,9V,12V,18W Max*2



Weight

About 13.5KG / 30lbs



Size

L378xW239xH255mm / L14.9xW9.4xH10in



Discharge Temperature

-20°C~45°C / -4°F~113°F



APP networking control



Battery Expansion





E1500 LFP

1536Wh 2200W



 Capacity	1536Wh (51.2V/30Ah)
 Battery Type	LiFePO4 (3500+ Cycles to 80%)

 AC Input	1400W Max
 Solar Input	Voc 11Vdc~60Vdc / 1000W Max
 Car Input	12Vdc~18Vdc, 100W Max
 UPS Power	1800W Max
 Charging time	1.8 Hour

 AC Output	2200W Max
 DC 12V Output	12V30A*1/12V10A*1/12V5A*1
 USB-C Output	5V,9V,12V,20V/100W ; 5V,9V,12V/18W
 USB-A Output	5V,9V,12V / 18W Max*2
 Wireless Charging Pad Output	15W Max*1

 weight	17.4KG / 38.4lbs
 Size	L377xW237xH305mm / L14.8xW9.4xH12in
 Discharge Temperature	-20°C~45°C / -4°F~113°F

 APP networking control	 Battery Expansion
--	---

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR



E2400 LFP

2304Wh 3000W

 Capacity 2304Wh (51.2V/45Ah)

 Battery Type LiFePO4 (3500+ Cycles to 80%)

 AC Input 100Vac~120Vac / 1800W Max

 Solar Input Voc 11Vdc~100Vdc / 800W Max / 15A Max*2

 UPS Power 1800W Max

 Charging time 1.5 Hour

 AC Output 100Vac~120Vac / 50-60Hz / 3000W

 DC 12V Output 12V30A*1/12V10A*1/12V5A*1

 USB-C Output PD100W*1/PD140W*2

 USB-A Output 5V,9V,12V / 18W Max*3

 Weight 25KG / 55lbs

 Size L412xW257.1xH289mm / L16.2xW10.1xH11.3in

 Discharge Temperature -20°C~45°C / -4°F~113°F

 APP networking control

 Battery Expansion

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR





E3600 LFP

3072Wh 3600W

	Capacity	3072Wh (51.2V/60Ah)
	Battery Type	LiFePO4 (3500+ Cycles to 80%)
	AC Input	3200W Max
	Solar Input	Voc 12Vdc~30Vdc, 150W Max, 7A Max Voc 32Vdc~150Vdc, 1200W Max, 20A Max*2
	Car Input	12Vdc~30Vdc, 150W Max
	UPS Power	1800W(15A AC Cable) / 3600W(30A AC Cable)
	Charging time	1.3 Hour

	AC Output	3600W Max
	DC 12V Output	12V30A*1/12V10A*1/12V5A*1
	USB-C Output	5V,9V,12V,20V/100W ; 5V,9V,12V/18W
	USB-A Output	5V,9V,12V / 18W Max*4
	Wireless Charging Pad Output	15W Max*2

	Weight	About 36KG / 79lbs
	Size	L445xW307xH350mm / L17.5xW12.1xH13.8in
	Discharge Temperature	-20°C~45°C / -4°F-113°F

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR



APP networking control



Battery Expansion



240V Split Phase Bonding



IPS touch screen



Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR

E3800 LFP

3840Wh 4200W



Capacity

3840Wh (51.2V/75Ah)



Battery Type

LiFePO4 (3500+ Cycles to 80%)



AC Input

3200W Max



Solar Input

Voc 12Vdc~30Vdc, 150W Max, 7A Max
Voc 32Vdc~150Vdc, 1500W Max, 20A Max*2



Car Input

12Vdc~30Vdc, 150W Max



UPS Power

1800W(15A AC Cable) / 3600W(30A AC Cable)



Charging time

1.5 Hour



AC Output

4200W Max



DC 12V Output

12V30A*1/12V10A*1/12V5A*1



USB-C Output

5V,9V,12V/18W ; 5V,9V,12V,20V/100W



USB-A Output

5V,9V,12V / 18W Max*4



Weight

About 39.6KG / 87.3lbs



Size

L445xW307xH373mm / L17.5xW12.1xH14.7in



Discharge Temperature

-20°C~45°C / -4°F~113°F



APP networking control



Battery Expansion



240V Split Phase Bonding



IPS touch screen





EP3800-48V

3840Wh



Optional



Capacity

3840Wh (51.2V/75Ah)



Battery Type

LiFePO4 (3500+ Cycles to 80%)



Weight

About 26KG / 57.3lbs



Size

L441xW312xH223mm / L17.3xW12.2xH7.8in



Discharge Temperature

-20°C~45°C / -4°F-113°F



Battery Expansion



F1000LFP

960Wh 1500W

 Capacity 960Wh (64V/15Ah)

 Battery Type LiFePO4 (3500+ Cycles to 80%)

 AC Input 1000W Max

 Solar Input Voc 11Vdc~60Vdc/600W Max

 Car Input 600W

 UPS Power 1500W

 Charging time 1.1 Hour

 AC Output 1500W Max

 DC 12V Output 12V10A*1/12V5A*1

 USB-C Output PD100W*1+PD33W*1

 USB-A Output 18W*2

 Weight About 10.85KG / 23.9lbs

 Size L380xW217xH214mm / L15xW8.5xH8.4in

 Discharge Temperature -20°C~45°C / -4°F~113°F

 APP networking control  LED Lighting lamp

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR



F2000LFP

1920Wh 2400W

Capacity 1920Wh (64V/30Ah)

Battery Type 磷酸铁锂 (80%@3500+ Cycles)

AC Input 1800W Max

Solar Input Voc 11Vdc~100Vdc/1200W Max

UPS Power 1800W Max

Charging time 1.1 Hour

AC Output 2400W Max

DC 12V Output 12V10A*1/12V5A*1

USB-C Output 65W*1/PD140W*1

USB-A Output 18W*2

Weight About 19.5KG / 42.99bs

Size L442xW240xH250mm / L17.4xW9.4xH9.8in

Discharge Temperature -20°C~45°C / -4°F~113°F

APP networking control LED Lighting lamp

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR





F3000LFP

3072Wh 3600W

Capacity 3072Wh (51.2V/60Ah)

Battery Type LiFePO4 (3500+ Cycles to 80%)

AC Input 1800W Max

Solar Input Voc 25Vdc~120Vdc/1600W Max

UPS Power 1800W Max

Charging time 1.5 Hour

AC Output 3600W

DC 12V Output 12V-10A / 12V-5A / Cigar Port *1 / 5525 Output *2

USB-C Output PD100W*1 ; 18W*1

USB-A Output 18W*2

Weight About 28.7KG / 63.3lbs

Size L489xW295xH282mm / L19.3xW11.6xH11.1in

Discharge Temperature -20°C~45°C / -4°F~113°F

Battery Expansion APP networking control

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR



F4000LFP

3840Wh 6000W

Capacity 3840Wh (51.2V/75Ah)

Battery Type LiFePO4 (3500+ Cycles to 80%)

AC Input 3600W Max

Solar Input Voc 25Vdc~150Vdc/3000W Max/30A Max

UPS Power 6000W Max

Charging time 1.3 Hour

AC Output 6000W

DC 12V Output DC5525*1; XT60*1

USB-C Output PD100W*1

USB-A Output 18W*2

Weight About 48KG / 63.25lbs

Size L567xW351xH310mm / L22.32xW13.8xH12.2in

Discharge Temperature -20°C~45°C / -4°F~113°F

Battery Expansion APP networking control

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR





F5000LFP

5120Wh 7200W

Capacity 5120Wh (51.2V/100Ah)

Battery Type LiFePO4 (3500+ Cycles to 80%)

AC Input 3600W Max

Solar Input Voc 30Vdc~180Vdc/3200W Max/25A Max*2

UPS Power 100Vac~120Vac/30A(Max) (Low-voltage version)
220Vac~240Vac/15A(Max) (High-voltage version)

Charging time 1.8 Hour

AC Output 3600W/7200W

DC Output DC5525*1; XT60*1

USB-C Output PD100W*2

USB-A Output 18W*2

Weight About 56.2KG / 123.9lbs

Size L551xW381xH332mm / L21.7xW15xH13.1in

Discharge Temperature -20°C~45°C / -4°F~113°F

Battery Expansion IPS touch screen Statistics

APP networking control Split phase output Portable cart

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR



FP5000-48V

5120Wh

 Capacity 5120Wh (51.2V/100Ah)

 Battery Type LiFePO4 (3500+ Cycles to 80%)

 Weight About 40KG / 88lbs

 Size L551xW381xH190mm / L21.7xW15xH7.48in

 Discharge Temperature -20°C~45°C / -4°F~113°F

 Battery heating

Cascading hosts: E1500LFP,E1000LFP,E3600LFP,F3000LFP,F5000LFP
and other machines with 48V systems

Optional





D39

38.48Wh

Capacity	38.48Wh
Input Voltage	80~260Vac,50Hz/60HZ
Battery slot	4S (4-cell series Li-ion)
USB Output	5V 2.6A Max
DC Output	9V $\pm$ 0.3V, Max 2A, Max 18W 12V $\pm$ 0.3V, Max 2A, Max 24W 15V $\pm$ 0.4V, Max 1.5A, Max 22.5W 24V $\pm$ 0.4V Max 0.5A, Max 12W
Size	199.6 $\times$ 144.6 $\times$ 34.6mm / 7.9 $\times$ 5.7 $\times$ 1.4in
Weight	500g
Operating Temp	-20°C~45°C / -4°F~113°F



D77

76.96Wh

Capacity	79.96Wh
Input Voltage	80~260Vac,50Hz/60HZ
Battery slot	4S (4-cell series Li-ion)
USB Output	5V 2.6A Max
DC Output	9V $\pm$ 0.3V, Max 2A, Max 18W 12V $\pm$ 0.3V, Max 2A, Max 24W 15V $\pm$ 0.4V, Max 1.5A, Max 22.5W 24V $\pm$ 0.4V Max 0.5A, Max 12W
Size	199.6 $\times$ 144.6 $\times$ 34.6mm / 7.9 $\times$ 5.7 $\times$ 1.4in
Weight	700g
Operating Temp	-20°C~45°C / -4°F~113°F





WB12200

2560Wh



 Capacity 2560Wh (12.8V/200Ah)

 Battery Type LiFePO4 (3500+ Cycles to 80%)

 DC Output XT90*1; 10~14.4Vdc, 200A Max

 DC Input 14.2Vdc, 100A Max

 Weight About 22KG / 48.5lbs

 Size L536xW210xH212mm / L21.1xW8.3xH8.3in

 Discharge Temperature -20°C~45°C / -4°F~113°F

 Circuit protection  Quick-connect design

 Battery heating  Compatible with VICTRON ecosystem

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR



HP48100

5.12kWh



 Capacity 5.12kWh(51.2V/100Ah)

 Battery Type LiFePO4 (3500+ Cycles to 80%)

Max Charging Current 100A

Max Discharging Current 100A

Max Charging Voltage 58.4V

Cut-off Voltage (Discharge) 43.2V

Max.Number of parallel 15

Cell Configuration 16S1P

Storage Time/Temp 6 months @ 25°C; 3 months @ 35°C; 1 month @ 45°C

 Weight About 50KG / 110lbs

 Size L475xW178xH485mm / L18.7xW7xH19in

 Discharge Temperature -20°C~60°C

 LCD Screen

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR





HP48200

10.24kWh



 Capacity	10.24kWh(51.2V/200Ah)
 Battery Type	LiFePO4 (3500+ Cycles to 80%)

Max Charging Current	200A
Max Discharging Current	100A
Max Charging Voltage	58.4V
Cut-off Voltage (Discharge)	43.2V

Max.Number of parallel	15
Cell Configuration	16S1P
Storage Time/Temp	6 months @ 25°C; 3 months @ 35°C; 1 month @ 45°C

 Weight	About 87KG / 191.8lbs
 Size	L805xW178xH485mm / L31.69xW7xH19in
 Discharge Temperature	-20°C~60°C

 LCD Screen

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR



HP48314

16.07kWh

 Capacity	16.07kWh(51.2V/314Ah)
 Battery Type	LiFePO4 (3500+ Cycles to 80%)

Max Charging Current	100A
Max Discharging Current	200A
Max Charging Voltage	58.4V
Cut-off Voltage (Discharge)	43.2V

Max.Number of parallel	15
Cell Configuration	16S1P
Storage Time/Temp	6 months @ 25°C; 3 months @ 35°C; 1 month @ 45°C

 Weight	About 126.5KG / 278.85lbs
 Size	L390xW270xH815mm / L7.8xW10.6xH32in
 Discharge Temperature	-20°C~60°C

 LCD Screen

Optional



US/JP



CN



DE/UK



FR



IL



UK



IN/ZA



AU



IT



BR



100W Solar Panel

Rated Power : 105W $\pm$ 5%

Voltage at Max. Power (Vmp) : 19.2 $\pm$ 5%

Current at Max. Power (Imp) : 5.47A $\pm$ 5%

Cell Efficiency: 23.5%

Ingress Protection(IP) Rating: IP67

Operating Temperature : -10°C~65°C/-14°F~149°F

Dimension (Unfolded) : 1539x472x3.2 $\pm$ 1mm / 60x18.5x1in

Dimension (Folded) : 429x472x51 $\pm$ 1mm / 16.7x18.5x2in

Weight : 4.64KG / 10.2lb



200W Solar Panel

Rated Power : 200W $\pm$ 10%

Voltage at Max. Power (Vmp) : 38.5V $\pm$ 5%

Current at Max. Power (Imp) : 5.1A $\pm$ 5%

Cell Efficiency: 23.5%

Ingress Protection(IP) Rating: IP67

Operating Temperature : -10°C~65°C/-14°F~149°F

Dimension (Unfolded) : 2064x595x5 $\pm$ 0.5mm / 81x23x0.1in

Dimension (Folded) : 561x595x40 $\pm$ 35mm / 22x23x1.5in

Weight : 6.9KG / 15.2lb



300W Solar Panel

Rated Power : 300W $\pm$ 5%

Voltage at Max. Power (Vmp) : 38.5V $\pm$ 5%

Current at Max. Power (Imp) : 7.32A $\pm$ 5%

Cell Efficiency: 23.5%

Ingress Protection(IP) Rating: IP67

Operating Temperature : -10°C~65°C/-14°F~149°F

Dimension (Unfolded) : 2362x787x27 $\pm$ 1mm / 93x30x1in

Dimension (Folded) : 636x787x49 $\pm$ 1mm / 25x30x1.9in

Weight : 12.74KG / 28lb



PB400

384Wh

Capacity	384Wh
Battery Type	LiFePO4 (3500+ Cycles to 80%)
Solar Input	15~35V
DC 12V Output	USB-A*2 / DC12V*5



P500

460.8Wh 500W

Capacity	460.8Wh(12.8V/36Ah)
Battery Type	LiFePO4 (3500+ Cycles to 80%)
AC Output	500W Max*2
DC Output	DC 12V-5A 5521*6
USB-A Output	5V,9V,12V,18W Max*2
USB-C Output	5V,9V,12V,18W Max*2
DC Input	15Vdc~60Vdc,200W Max,5A Max 5521*1; 15Vdc~60Vdc,200W Max,7A Max XT60*1
LED Light	3W
Size	L280×W152×H222mm/L11×W5.98×H8.74in
Weight	5.5KG/12.1lbs
Discharge Temperature	-20°C~45°C / -4°F-113°F

DESCRIPTION

				
Model:	E300LFP	E500LFP	E1000LFP	E1500LFP
Capacity:	288Wh	576Wh	1024Wh	1536Wh
Rated Power:	600W	600W	1800W	2200W
Battery Type:	LiFePO4	LiFePO4	LiFePO4	LiFePO4
AC (Adapter) Input:	300W Max	300W Max	1000W Max	1400W Max
Solar Input:	12V~28V/100W Max	12V~28V/100W Max	12V~65V/600W Max	11V~60V/1000W Max
Car Input:	12V~24V/100W Max	12V~24V/100W Max	11V~60V/600W Max	\
Charging Time:	1.3 H	1.5 H	1.3 H	1.8 H
UPS Power:	600W Max	600W Max	1800W Max	1800W Max
DC 12V Output:	12V10A*1/12V5A*1/24V5A*1	12V10A*1/12V5A*1/24V5A*1	12V20A*1/12V10A*1/12V5A*1	12V30A*1/12V10A*1/12V5A*1
USB-C Output:	100W	100W	100W*2	100W*1/18W*1
USB-A Output:	18W Max*2	18W Max*2	18W Max*2	18W Max*2
Size:	L254xW172xH154mm	L254xW170xH187mm	L378xW239xH255mm	L377xW237xH305mm
Weight:	4.8KG	6.75KG	13.5KG	17.4KG
Wireless Charging:	15W Max	15W Max	\	15W Max
Battery Expansion:	\	\	√	√
APP Connection:	√	√	√	√



E2400LFP



E3600LFP



E3800LFP



EP3800-48V

2304Wh	3072Wh	3840Wh	3840Wh
3000W	3600W	4200W	\
LiFePO4	LiFePO4	LiFePO4	LiFePO4
1800W Max	3200W Max	3200W Max	\
11V~100V/800W Max*2	32V~150V/1200W Max*2	32V~150V/1500W Max*2	\
\	12V~30V/150W Max	12V~30V/150W Max	\
1.5 H	1.3 H	1.5 H	\
1800W	1800W(15A AC Cable)/ 3600W(30A AC Cable)	1800W(15A AC Cable)/ 3600W(30A AC Cable)	\
12V30A*1/12V10A*1/12V5A*1	12V30A*1/12V10A*1/12V5A*1	12V30A*1/12V10A*1/12V5A*1	\
PD100W*1+PD100W*2	100W*1/18W*1	100W*1/18W*1	\
18W*3	18W Max*4	18W Max*4	\
L412xW257.1xH289mm	L441xW312xH350mm	L445xW307xH373mm	L441xW312xH223mm
25KG	36KG	39.6KG	30.3KG
\	15W Max*2	\	\
√	√	√	√
√	√	√	\

DESCRIPTION

						
Model:	F1000LFP	F2000LFP	F3000LFP	F4000LFP	F5000LFP	FP5000-48V
Capacity:	960Wh	1920Wh	3072Wh	3840Wh	5120Wh	5120Wh
Rated Power:	1500W	2400W	3600W	6000W	7200W	\
Battery Type:	LiFePO4	LiFePO4	LiFePO4	LiFePO4	LiFePO4	LiFePO4
AC (Adapter) Input:	1000W Max	1800W Max	1800W Max	3600W Max	3600W Max	\
Solar Input:	11V~60V/600W Max	11V~60V/1200W Max	25V~120V/1600W Max	25V~150V/3000W Max	30V~180V/3200W Max	\
Charging Time:	1.1 H	1.1 H	1.5 H	1.3 H	1.8 H	\
UPS Power:	1500W Max	1800W Max	1800W Max	3600W Max	3600W Max	\
DC 12V Output:	12V10A*1/12V5A*1	12V10A*1/12V5A*1	12V10A*1/12V5A*2	XT60*1/5525*1	XT60*1/5525*1/800W Max	\
USB-C Output:	PD100W*1/PD33W*1	65W*1/PD140W*1	PD100W/18W*1	PD100W*2	PD100W*2	\
USB-A Output:	18W Max*2	18W Max*2	18W Max*2	18W Max*2	18W Max*2	\
Size:	L380xW217xH214mm	L442xW240xH250mm	L489xW295xH282mm	L567xW351xH310mm	L551xW381xH332mm	L551xW381xH190mm
Weight:	10.85KG	19.5KG	28.7KG	48KG	56.2KG	40KG
Battery Expansion:	\	\	√	√	√	√
APP Connection:	√	√	√	√	√	√



Shenzhen Pecron Technology Co.,Ltd

Website: www.pecron.com

Tel: 0755-28601668

Address: A503, No.2 Tian An Cyber Park, Longgang District, Shenzhen