LITE-ON SEMICONDUCTORS

BC857

PNP General Purpose Transistor





FEATURES

- Ideally suited for automatic insertion
- For Switching and AF Amplifier Applications

MECHANICAL DATA

- Case: SOT-23 Plastic
- Case material: “Green” molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl)
- Lead Free in RoHS 2002/95/EC Compliant

Maximum Ratings @ T_A = 25℃

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	-50	V
Collector-Emitter Voltage	V_{CEO}	-45	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current -Continuous	I_C	-100	mA
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_J	150	℃
Storage Temperature Range	T_{STG}	-65~+150	℃

Electrical Characteristics @ T_A = 25℃ unless otherwise specified

Characteristic	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Collector-base breakdown voltage	I_C=-10μA,I_E=0	V_{CBO}	-50			V
Collector-emitter breakdown voltage	I_C=-10mA,I_B=0	V_{CEO}	-45			V
Emitter-base breakdown voltage	I_E=-1μA,I_C=0	V_{EBO}	-5			V
Collector-base cut-off current	V_{CB}=-45V,I_E=0	I_{CBO}			-0.1	uA
Collector-emitter cut-off current	V_{CB}=-40V,I_B=0	I_{CEO}			-0.1	uA
Emitter-base cut-off current	V_{CB}=-5V,I_C=0	I_{EBO}			-0.1	uA
DC current gain	V_{CE}=-5V,I_C=-2mA A B C	h_{FE}	125 220 420		250 475 800	
Collector-emitter saturation voltage	I_C=-100mA,I_B=-5mA	V_{CE}(sat)			-0.5	V
Base-emitter saturation voltage	I_C=-100mA,I_B=-5mA	V_{BE}(sat)			-1.1	V
Transition frequency	V_{CE}=-5V,I_C=-10mA, f=100MHz	f_T	100			MHz
Collector output capacitance	V_{CB}=-10V,f=1MHz	C_{ob}			4.5	pF

REV. 2, Jun-2012, KSPR06

SOT-23 Outline Dimension

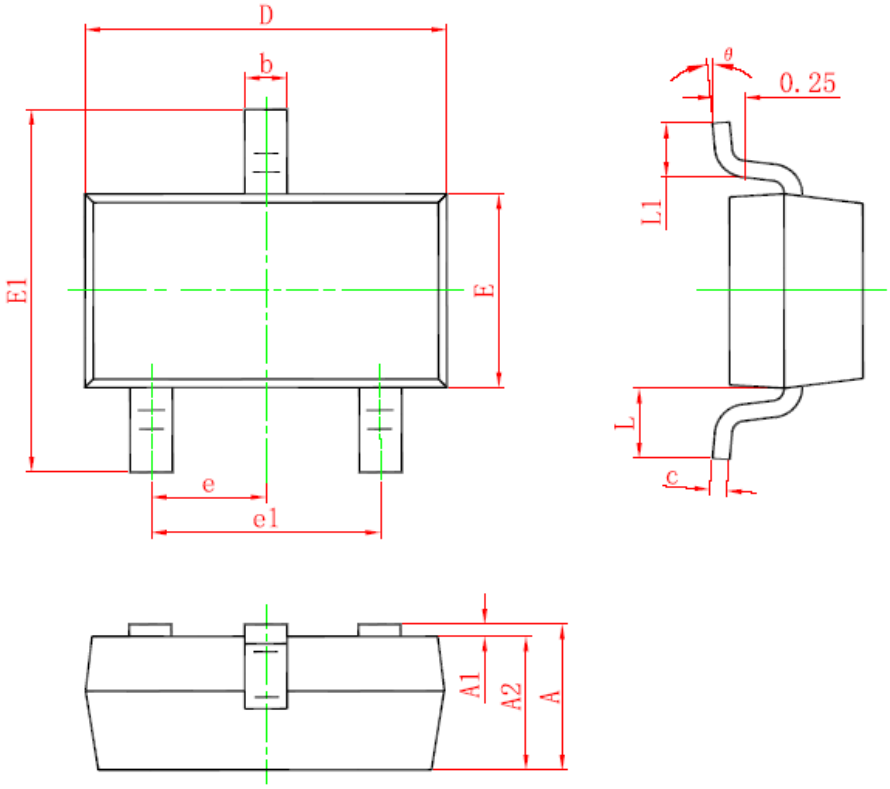

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	6°

Device Marking :

Device P/N	Classification of h_{FE}	Marking code
BC857A	125-250	3E
BC857B	220-475	3F
BC857C	420-800	3G

Electrical characteristic curves

Fig.1 DC Current Gain vs. Collector Current_BC857A

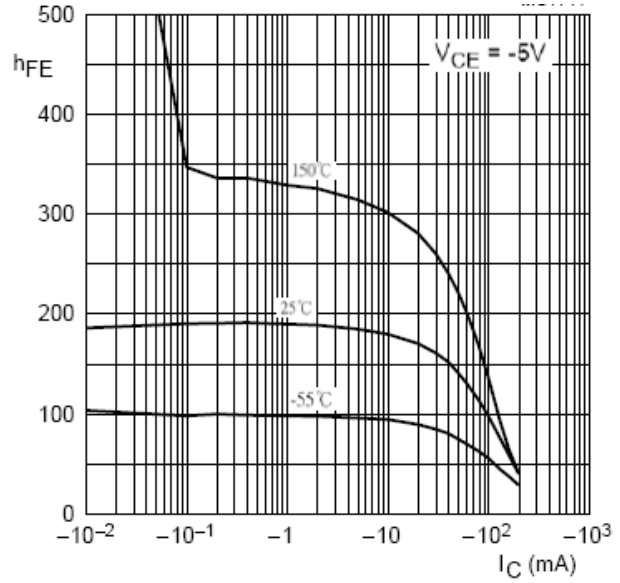

Fig.2 Grounded Emitter Propogation_BC857A

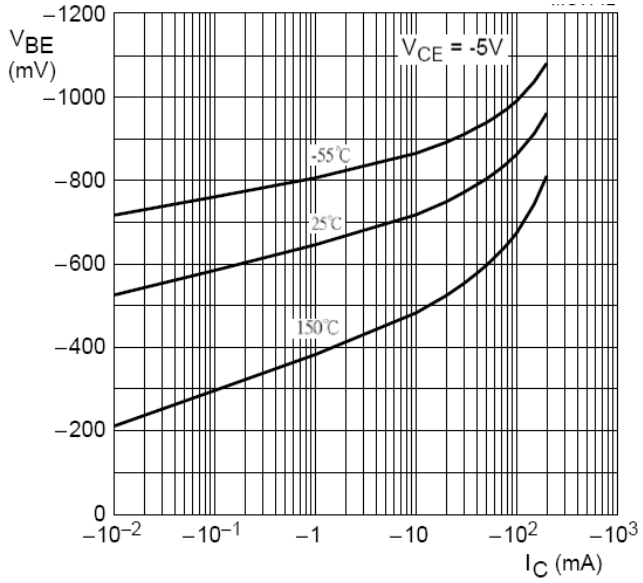

Fig.3 Collector Emitter Saturation Voltage vs. Collector Current_BC857A

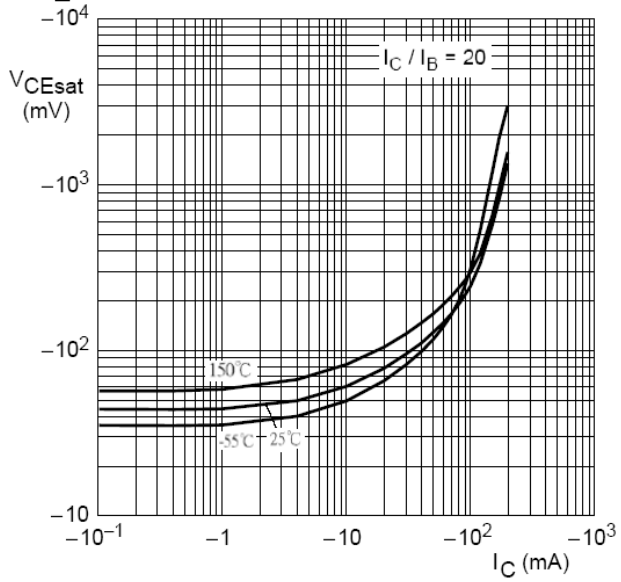

Fig.4 Base Emitter Saturation Voltage vs. Collector Current_BC857A

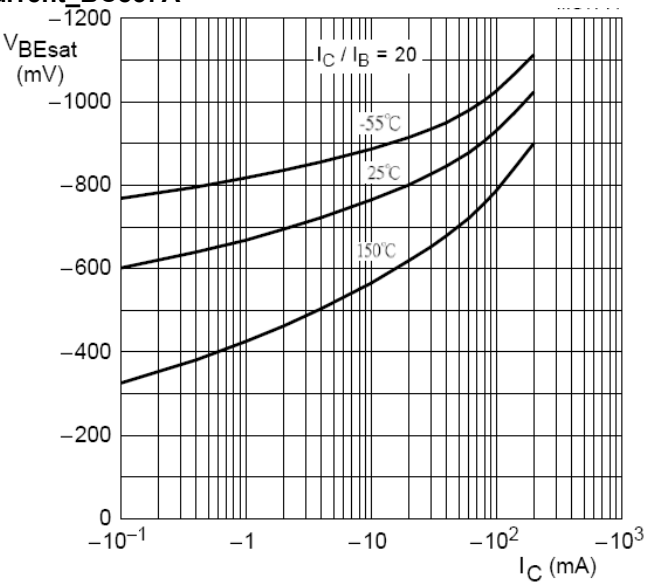

Fig.5 DC Current Gain vs. Collector Current_BC857B

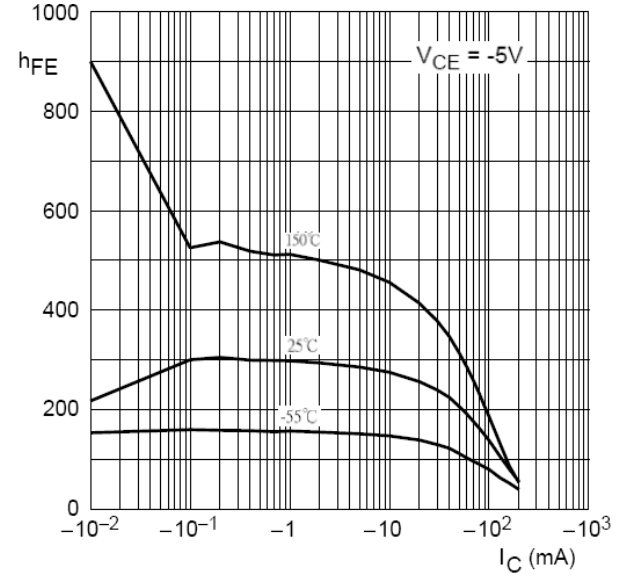

Fig.6 Grounded Emitter Propogation_BC857B

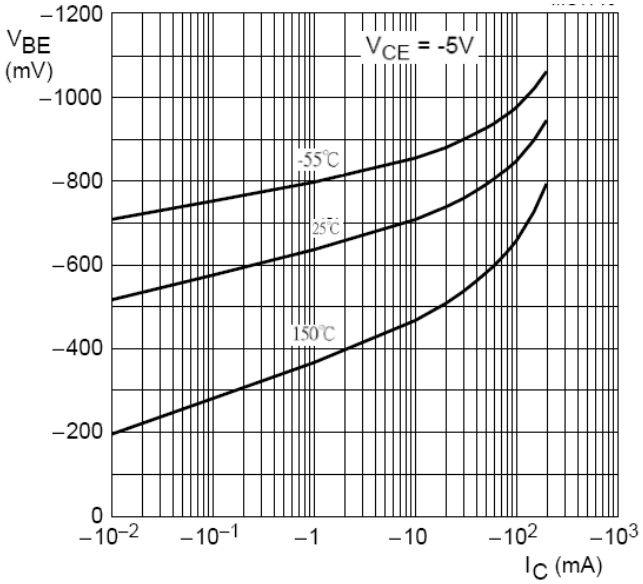

Fig.7 Collector Emitter Saturation Voltage vs. Collector Current_BC857B

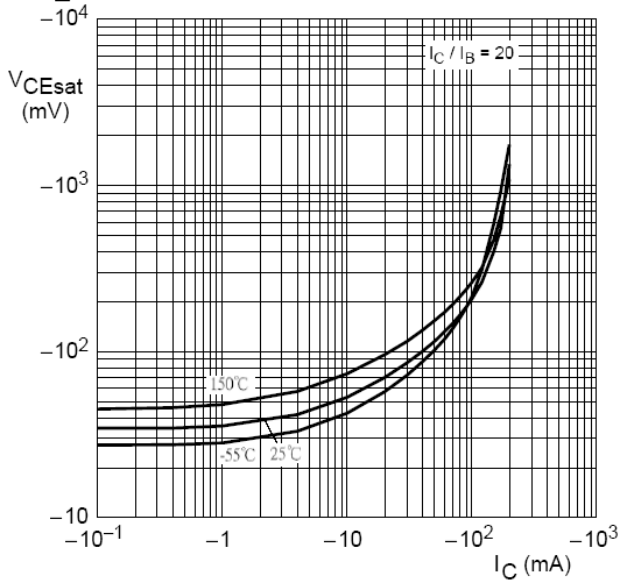

Fig.8 Base Emitter Saturation Voltage vs. Collector Current_BC857B

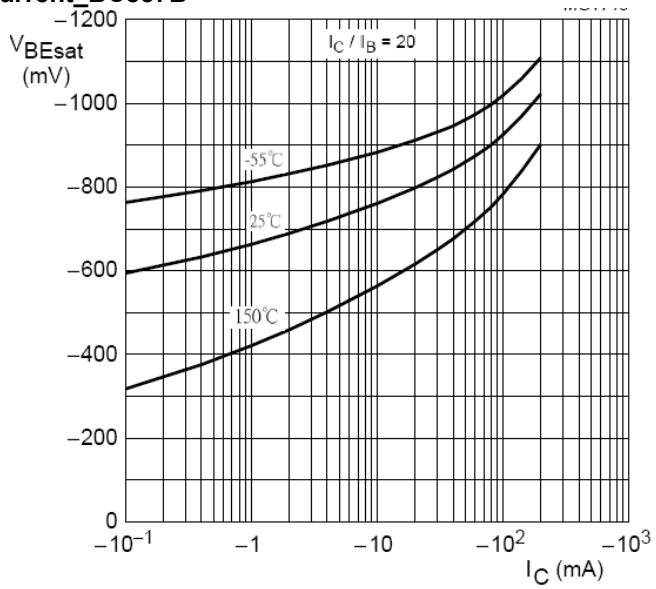

Fig.9 DC Current Gain vs. Collector Current_BC857C

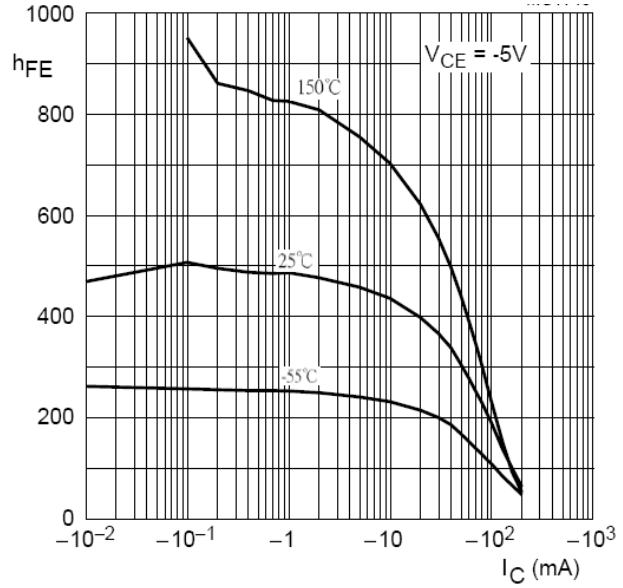

Fig.10 Grounded Emitter Propogation_BC857C

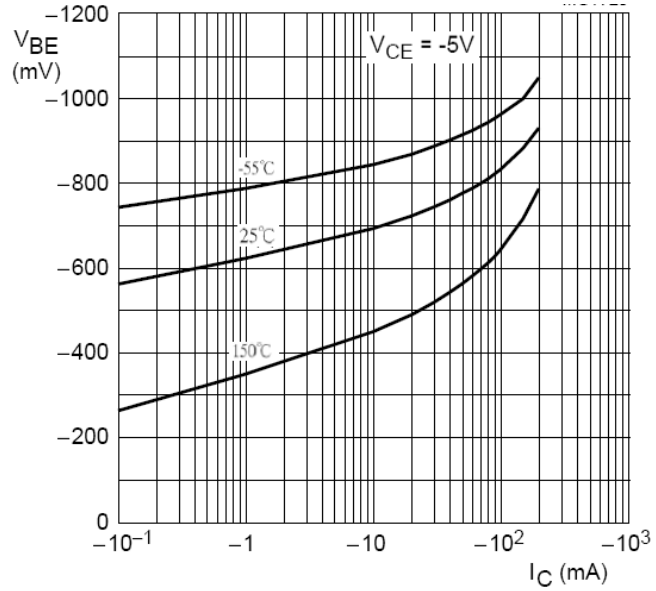

Fig.11 Collector Emitter Saturation Voltage vs. Collector Current_BC857C

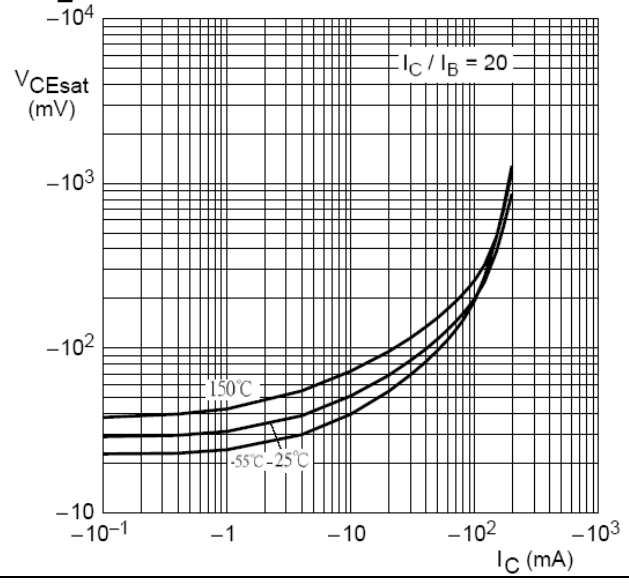

Fig.12 Base Emitter Saturation Voltage vs. Collector Current_BC857C

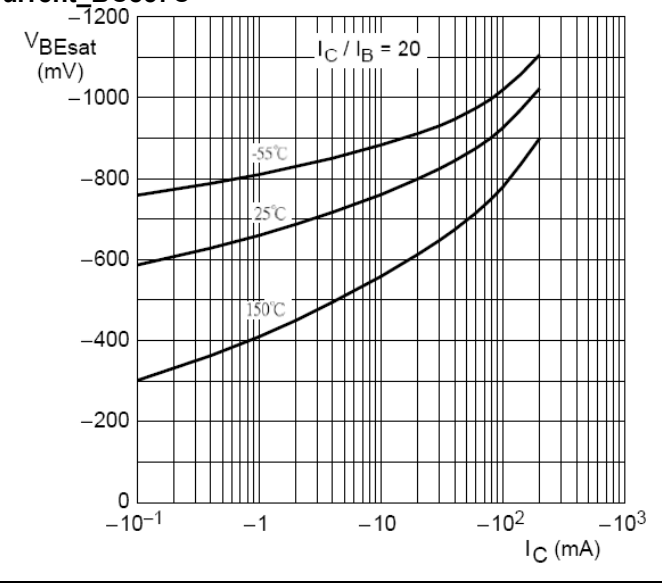

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.