

## Small Signal Product

## NPN Transistor

### FEATURES

- For switching and AF amplifier applications
- These types are subdivided into three groups A, B and C according to their current gain
- Moisture sensitivity level 1
- Driver transistor
- Pb free and RoHS compliant
- Green compound (Halogen free) with suffix "G" on packing code and prefix "G" on date code



1. Collector 2. Base 3. Emitter  
TO-92 Plastic Package



### MECHANICAL DATA

- Case: TO-92 small outline plastic package
- Terminal: Matte tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- High temperature soldering guaranteed: 260°C/10s
- Weight: 190 mg (approximately)

### TO-92

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T <sub>A</sub> =25°C unless otherwise noted)				
PARAMETER		SYMBOL	VALUE	UNIT
Total Power dissipation		P <sub>TOT</sub>	500	mW
Collector-Base Voltage	BC546	V <sub>CBO</sub>	80	V
	BC547, BC550		50	
	BC548, BC549		30	
Collector-Emitter Voltage	BC546	V <sub>CEO</sub>	65	V
	BC547, BC550		45	
	BC548, BC549		30	
Emitter-Base Voltage	BC546	V <sub>EBO</sub>	6	V
	BC547, BC550		6	
	BC548, BC549		6	
Collector Current		I <sub>C</sub>	100	mA
Peak Collector Current		I <sub>CM</sub>	200	mA
Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>STG</sub>	-65 to + 150	°C

PARAMETER			SYMBOL	MIN	MAX	UNIT
Collector-Base Breakdown Voltage	BC546	I <sub>C</sub> = 100μA	V <sub>(BR)CBO</sub>	80	-	V
	BC547, BC550			50		
	BC548, BC549			30		
Collector-Emitter Breakdown Voltage	BC546	I <sub>C</sub> = 10mA	V <sub>(BR)CEO</sub>	65	-	V
	BC547, BC550			45		
	BC548, BC549			30		
Emitter-Base Breakdown Voltage	BC546	I <sub>E</sub> = 100μA	V <sub>(BR)EBO</sub>	6	-	V
	BC547, BC550			6		
	BC548, BC549			6		
Collector Base Cutoff Current	V <sub>CB</sub> = 30V		I <sub>CBO</sub>	-	15	nA
Emitter Base Cutoff Current	V <sub>EB</sub> = 5 V		I <sub>EBO</sub>	-	100	nA
DC Current Gain	Current Gain Group: A B C		h <sub>FE</sub>	110	220	V
				200	450	
				420	800	

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

FIG.1 Static Characteristic

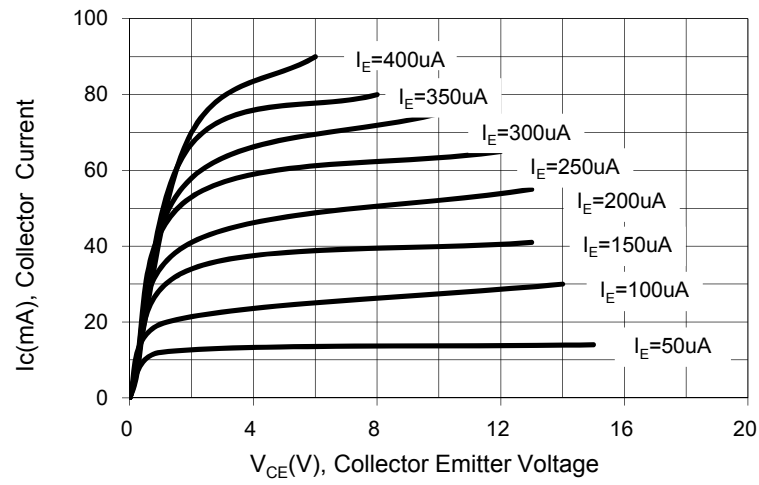


FIG. 2 Transfer Characteristic

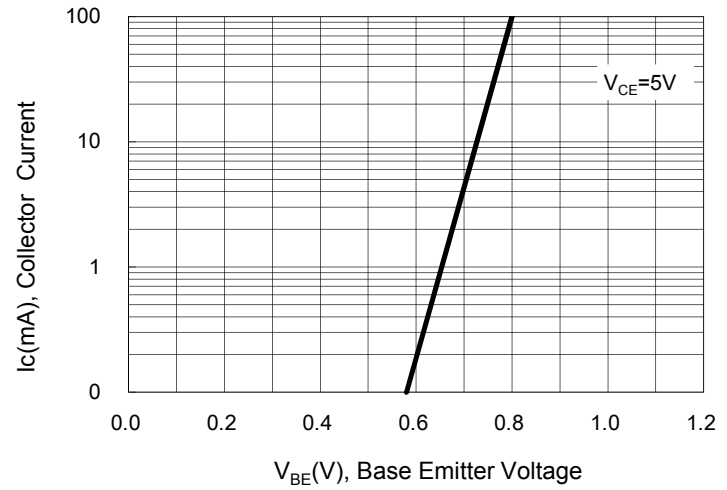


FIG. 3 DC Current Gain


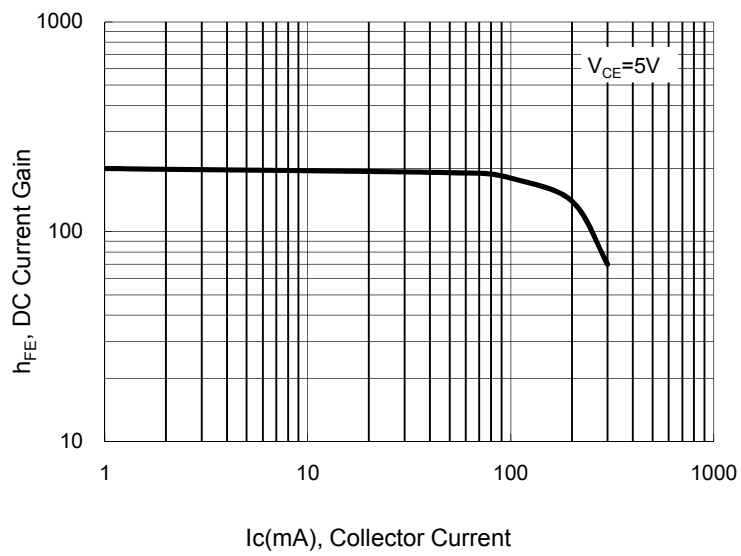


FIG. 4 Base Emitter Saturation Voltage  
Collector Emitter Saturation Voltage

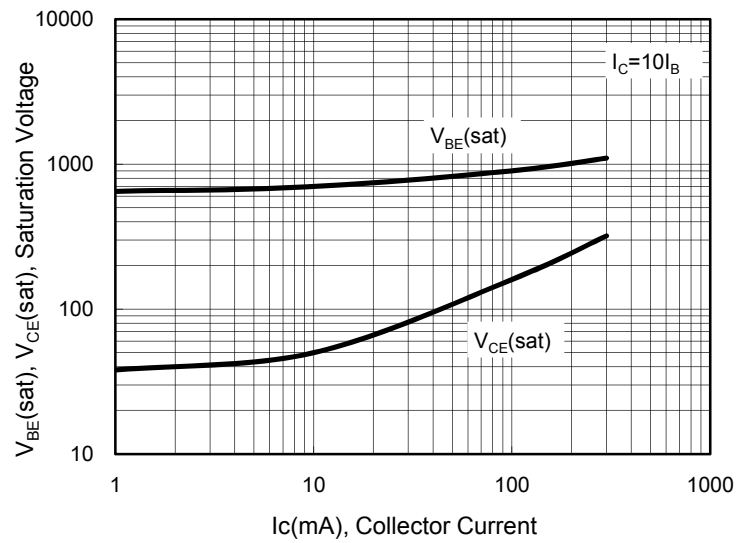

## Small Signal Product

ORDERING INFORMATION						
PART NO.	MANUFACTURE CODE (Note1)	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING	MARKING
BC5xxA/B/C (Note2)		A1	G	TO-92	4K / Ammo	BC5xxA/B/C (Note2)
BC5xxA/B/C (Note2)		B1	G	TO-92	5K / Bulk	BC5xxA/B/C (Note2)


Note1: Manufacture special control, if empty means no special control requirement.

Note2: "xx" is Device Code from "46" thru "50", and "MARKING" should follow the "PART NO."

EXAMPLE					
PREFERRED P/N	PART NO.	MANUFACTURE CODE	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
BC546A A1G	BC546A		A1	G	Green compound


Small Signal Product

DIMENSIONS  
TO-92 Bulk

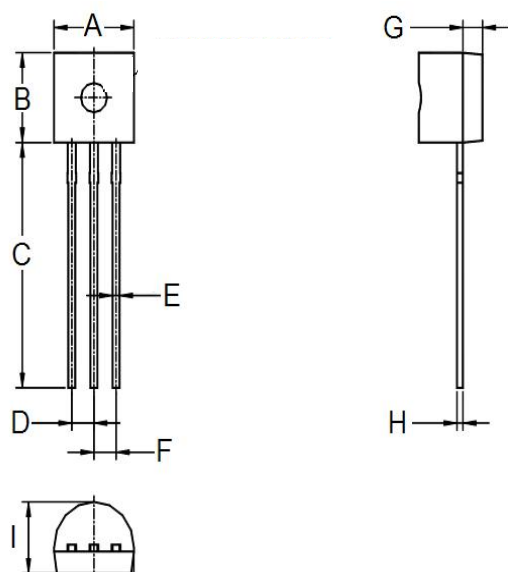

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	4.40	5.10	0.173	0.201
B	4.30	4.70	0.169	0.185
C	12.50	14.50	0.492	-
D	1.17	1.37	0.046	0.054
E	0.35	0.55	0.014	0.022
F	1.17	1.37	0.046	0.054
G	0.59	1.40	0.023	0.055
H	0.29	0.51	0.011	0.020
I	3.300	4.100	0.130	0.161

TO-92 Ammo

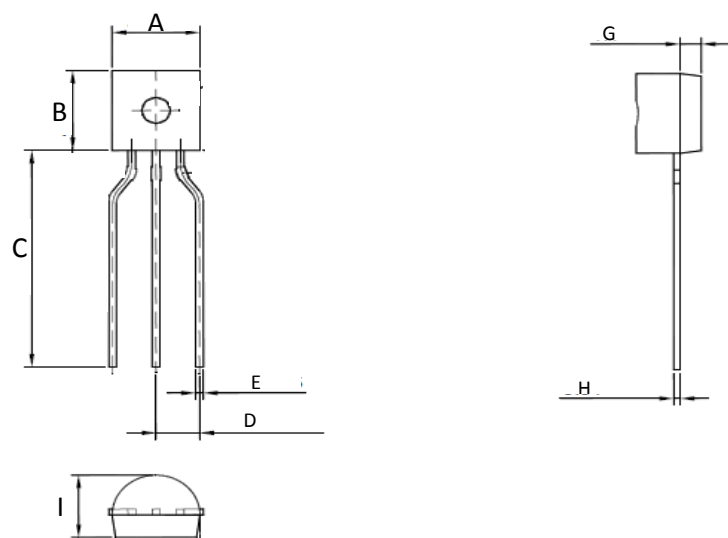

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	4.30	4.70	0.169	0.185
B	4.30	4.70	0.169	0.185
C	12.50	-	0.492	-
D	2.20	2.80	0.087	0.110
E	0.35	0.55	0.014	0.022
G	1.00	1.20	0.039	0.047
H	0.29	0.51	0.011	0.020
I	3.30	3.70	0.130	0.146

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Taiwan Semiconductor:](#)

[BC550B A1](#) [BC547B A1](#)