

# Waveoptics

## FYS2150 Lab Report

Nicholas Karlsen

May 18, 2018

### Abstract

Exploring how Laser light behaves when passed through slits and grating of varying kinds and using this behavior to observe the emission lines of Hydrogen, Helium and Cadmium and finally using FP-inferometry to find the Bohr magneton.

## 1 Introduction

This report contains a summary and analysis of a lab day in which my lab and I partner performed experiments in which we explored how measurements could be made using the wave-like behavior of light, in particular, diffraction and interference. To begin with, we start by looking at the behavior of Laser light diffracted through a wide array of different singular slits, parallel slits and circular slits. After which we measured some of the emission lines of Hydrogen and Helium by the use of diffraction grating and lastly, by the use of an FP-interferometer the split, and slightly shifted emission lines of Cadmium subject to a magnetic field we deduced the Bohr magneton,  $\mu_B$ , experimentally.

## 2 Theory

### 2.1 Diffraction & Interference

When a monochromatic light wave of wavelength  $\lambda$  is passed through a slit of width  $a$ , the emerging diffraction pattern's measured intensity,  $E$ , in line,  $x$ , tangential to the path of the light satisfies the proportionality Eqn. 1, where  $u \equiv x/\lambda R$ ,  $R$  denoting the distance between the slit and the line,  $x$ .

$$E_1(x) \propto a^2 \left( \frac{\sin(\pi au)}{\pi au} \right) \quad (1)$$

The intensity is at a minimum when  $\sin(\pi au) = 0$ , which occurs when  $au$  is an integer and not zero.

For two parallel slits with a distance  $A$  between, the intensity is instead given by Eqn. 2, which will have intensity minimum when either  $au = n$  for nonzero  $n \in \mathbb{Z}$  or  $Au = 2n$  for  $n \in \mathbb{Z}$ .

$$E_2(x) \propto 4a^2 \cos^2(\pi Au) \left( \frac{\sin(\pi au)}{\pi au} \right)^2 \quad (2)$$

This can be generalized for N parallel slits satisfying Eqn. 3

$$E_N(x) \propto a^2 \left( \frac{\sin(N\pi Au)}{\sin(\pi Au)} \cdot \frac{\sin(\pi au)}{\pi au} \right)^2 \quad (3)$$

Lastly, for a circular slit the diffraction pattern instead follows a circular symmetry, and its intensity given by Eqn. 4 where  $w \equiv \frac{\pi ar}{\lambda R}$ , where r denotes the radial distance from the line of light and  $J_1$  is the first order bessel function. The first order bessel function is equal to zero for 0, 0.832, 7.016, 10.173 and 13.324, which can then be used to predict the expected minima of the intensity distribution.

$$E \propto \left( \frac{2J_1(w)}{\lambda R} \right)^2 \quad (4)$$

## 2.2 Spectral lines



Figure 1: Visible spectrum of hydrogen (Source: [https://no.wikipedia.org/wiki/Fil:Visible\\_spectrum\\_of\\_hydrogen.jpg](https://no.wikipedia.org/wiki/Fil:Visible_spectrum_of_hydrogen.jpg))

For each chemical element, there is an associated set of discrete wavelengths which its emitted light can have. These discrete wavelength are due to internal changes in energy levels, and can be predicted by looking at all the possible changes  $\Delta E$  and calculating the wavelength of the photon with this energy by using the Energy-momentum relation [3] and de Broglies equation [4].

The spectral lines of hydrogen, and other hydrogen-like elements are predicted by Eqn. 5, The Rydenberg formula, where  $Z$  denotes the atomic number of the element,  $R = 1.09737 \times 10^7 \text{ m}^{-1}$  the Rydenberg constant and  $n, n'$  are the principal quantum numbers of the electron before and after its transition. For hydrogen, the visible lines are found in the Balmer series,  $n' = 2$  and  $n = 3, 4, 5, \dots$ , shown in table 1 and visually in Fig. 1

$$\lambda_n = \frac{1}{RZ^2 \left[ \left( \frac{1}{n'} \right)^2 - \left( \frac{1}{n} \right)^2 \right]} \quad (5)$$

Table 1: The Balmer series.

n	3	4	5	6	7	$\infty$
$\lambda$	656.3nm	486.1nm	434.0nm	410.2nm	397.0nm	364.6nm

## 2.3 The Zeeman Effect

When subject to a uniform magnetic field,  $B$ , the energy levels of a molecule are shifted [1]. Resulting in additional, slightly shifted emission lines of wavelengths  $\lambda \pm \delta\lambda$ . See fig. 2. with tangential polarization relative to the emission lines for  $B = 0$ .

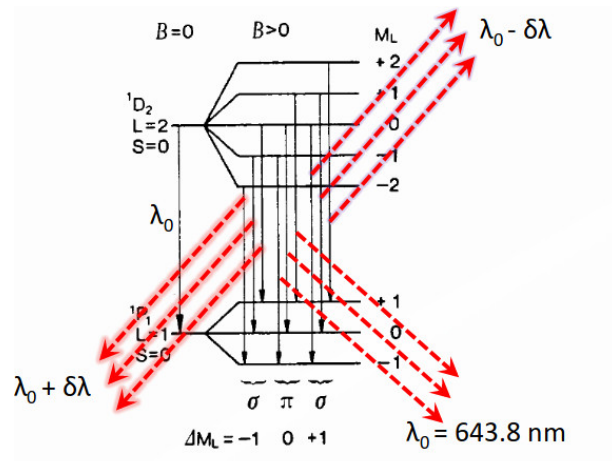


Figure 2: Some permitted  $\Delta E$  for cadmium, both in and outside of a magnetic field.

## 3 Experimental Procedure

### 3.1 Diffraction Grating

To investigate the specifications of a selection of slits, and their effect on laser, we used an apparatus as sketched in Fig. 3, where a laser lined up with two lenses and a diffraction slit(s) secured on an optical track. Laser passing through is then reflected by a mirror onto a screen in order to effectively increase the distance  $R$ , in which the laser has passed. This reflection does presumably cause the measurements to deviate slightly from the theoretical model used, but for the purposes of this experiment this deviation is taken to be negligible. Additionally, neither the laser source nor the optical track were fastened to the table and both were easily moved. We took care not to move them, but due to a very limited workspace this may have happened.

As we swapped between different types slits, the patterns projected onto the screen was recorded by outlining their features on a piece of paper held up to the screen with a pen. Drawing the lines in the "correct" position was not easy to do in a precise manner, and is likely the source of a significant error in our final results across all of the different measurements. Afterwards, distance between the lines was measured using a ruler.

Also, every time either the mirror or the screen were moved, the distance  $R_1$  and/or  $R_2$  was measured using a Bosch laser distance measurer.

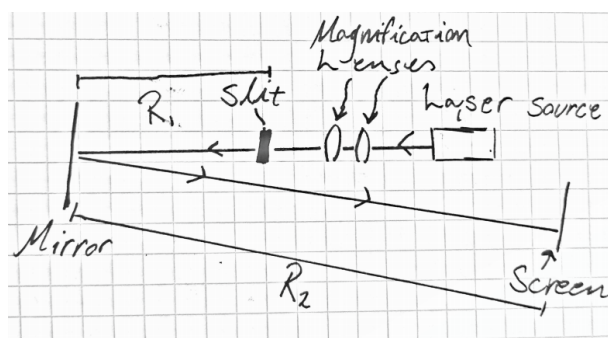


Figure 3: Sketch of apparatus used to measure diffraction lines of a laser

### 3.2 Diffraction spectroscopy

In order to determine the wavelength of some of the spectral lines in Hydrogen and helium, a spectrometer similar to the one depicted in Fig. 4 was used. Both the Collimator and the grating were fixed, and whilst the telescope was only fixed radially (relative to the center of the grating). The telescope was connected to a vernier scale, which read its angle  $\theta$  relative to the collimator.

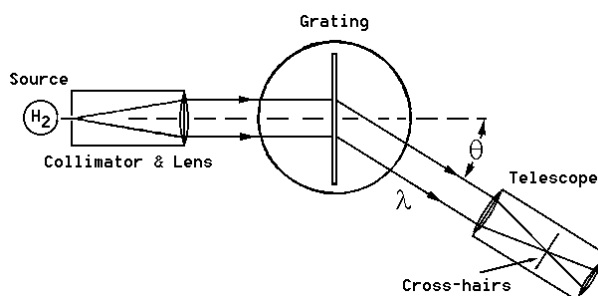


Figure 4: Sketch of spectrometer used to measure angle of diffraction(Source: [http://felix.physics.sunysb.edu/~allen/252/PHY251\\_H\\_spectrum\\_fig1.gif](http://felix.physics.sunysb.edu/~allen/252/PHY251_H_spectrum_fig1.gif))

Light coming from the source is passed through the collimator, hits the grating at a tangent and is diffracted. The visible wavelengths were then be observed through the telescope, and their angle of diffraction recorded by the vernier scale to an accuracy of  $10^{-1}$  deg. The diffracted wavelengths were mirrored on both sides, and by taking the difference in their angle on the vernier scale we get  $\theta$  satisfying Braggs' law for  $n = 1$ , used to determine the wavelength of the observed spectral line. In addition to recording the angle, we also made note of the color we "think" we saw, which was later used as a way to check the validity of our calculated wavelengths.

This procedure was performed for both Helium and Hydrogen, for which all clearly visible spectral lines were recorded in succession from the central top (parallel with the collimator) in both the "left" and "right" direction. The angles were recorded in succession from the center in order to ensure that each successive left angle would be in

accordance with the corresponding right angle. In addition, we made sure their recorded color matched and that we got the same number of measurements on both sides.

Lastly, in order for the lines to be visible, the room in which the experiment was performed was kept dark by covering the windows. For the Hydrogen source in particular, additional measures had to be taken by covering the apparatus in a plastic bag whilst finding the spectral lines, in an attempt to filter out make them more visible. This was only partially successful, as the lines were still quite difficult to see clearly.

### 3.3 Zeeman effect

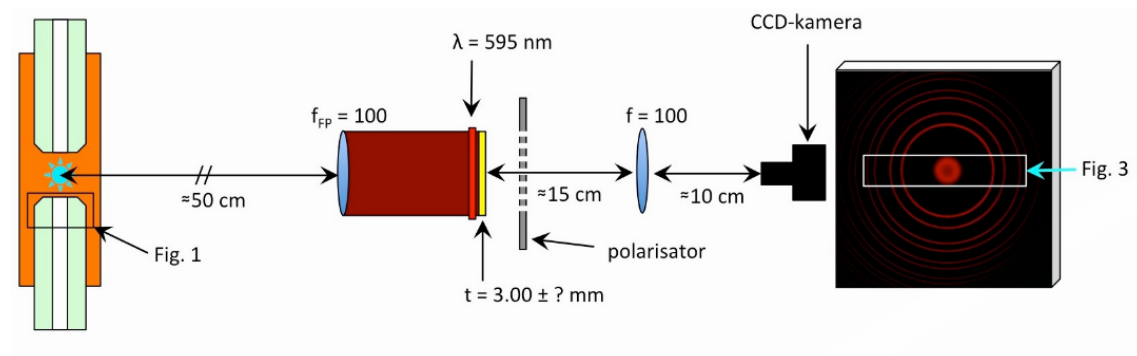


Figure 5: Simplified FP-interferometer

An FP-interferometer as was prepared as depicted in Fig. 5. The source being a cadmium lamp, which light is passed through a focusing lens, filtered by color and polarization, diffracted and focused through another lens before it is recorded by a sensitive camera which is connected to a computer. The exposure, contrast etc is then adjusted to make the diffraction lines as clear as possible.

Additionally, surrounding the source was an electromagnet connected to a power source. The calibration curve of the electromagnet used is shown in Fig. 7. By subjecting the cadmium lamp to a magnetic field, Zeeman splitting can be observed clearly by adjusting the polarization filter such that the original, diffraction pattern are not visible, and the new, "split" lines are fully luminous.

We saved pictures of these split lines when the current was set to 1, 2, 3 and 4 ampere.

These images were later processed using the script "zeemanread.py" included in appendix A. Which finds the diameter of the first 3 intensity maxima, excluding the central maximum. The script finds the inner and outer edge of each of the rings within 1 pixel, then finds the half-way point between the two as the position of the local intensity maximum. This is then used to deduce the diameter of the rings.

Whilst this method worked well for  $I = 4, 3, 2$  the image for  $I = 1$  did not have sufficiently separated lines for the script to work, so instead opted to read off the peaks manually by plotting the intensity distribution for a cross section of the image. As shown in Fig. 6.

From this data, i calculated the value of the Bohr magneton,  $\mu_B$  defined in Eqn. 6, where  $d_i$  denotes the diameter of the rings in succession from the center,  $hc = 1.98644568 \cdot 10^{-25}$  and  $t$ , the thickness of the glass plate in the FP-interferometer in Fig. 5.

$$\mu_b = \frac{hc}{4t} \frac{\sigma}{B}, \quad \sigma = \frac{d_2^2 - d_1^2}{d_3^2 - d_1^2} \quad (6)$$

As I am unable to quantify all of the uncertainties of this experiment, I will have to assume that most of them are negligible. The only uncertainty i am certain of, is that of  $\delta$ . The uncertainty of  $\sigma$  stems from only being able to determine the inner and outer locations of the diameters of the rings to an  $\pm 1$ px. This leads to  $\sigma$  having an uncertainty of  $\approx \pm 0.005$ . This was found using the formulae for the propogation of errors in Squires[2] and the derivation is shown in Eqn 8. Based on this error,  $\Delta\mu_B$  is then found by Eqn. 7, where the uncertainties of  $hc$ ,  $t$ , and  $B$  are neglected. The error of  $\sigma$  is found by the equations 8, where  $\Delta d = 1$ . This estimate of the uncertainty results in uncertainties of  $\mu_B$  in order of magnitude  $10^{-25}$ , approximately an order of magnitude less than the expected value of  $\mu_B$ .

$$\Delta\mu_B = \mu_B \sqrt{\left(\frac{\Delta\sigma}{\sigma}\right)^2} \quad (7)$$

$$\begin{aligned} \Delta d_i^2 &= 2d_i^2 \frac{\Delta d_i}{d} = 2d_i \Delta d \\ \Delta(d_i^2 - d_j^2) &= \sqrt{(\Delta d_i^2)^2 + (\Delta d_j^2)^2} = 2\Delta d \sqrt{(d_i)^2 + (d_j)^2} \\ \Delta\sigma &= \left(\frac{d_i^2 - d_j^2}{d_k^2 - d_j^2}\right) \sqrt{\left(\frac{2\Delta d \sqrt{(d_i)^2 + (d_j)^2}}{d_i^2 - d_j^2}\right)^2 + \left(\frac{2\Delta d \sqrt{(d_k)^2 + (d_j)^2}}{d_k^2 - d_j^2}\right)^2} \end{aligned} \quad (8)$$

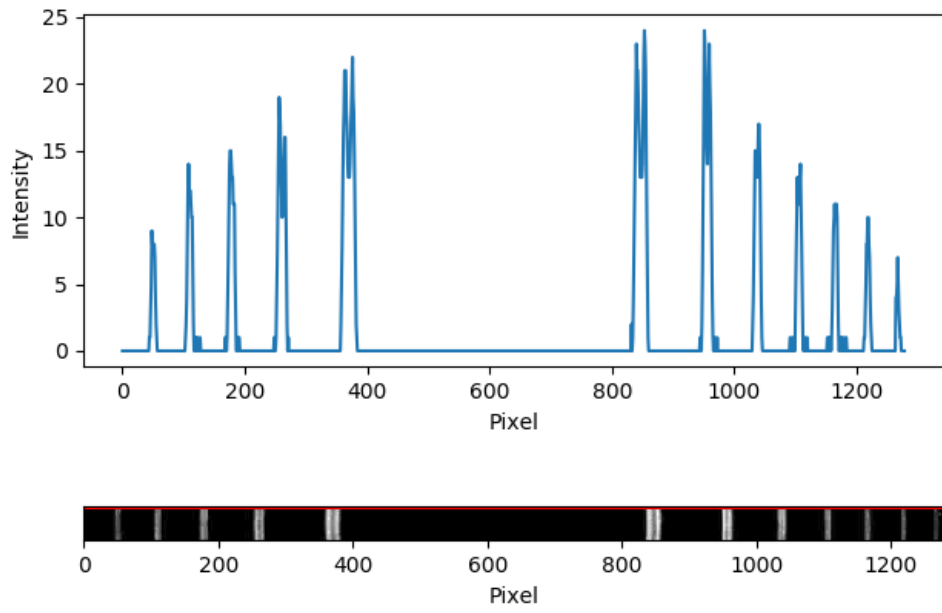


Figure 6: Intensity distribution for cross section of diffraction lines observed for  $I = 1A$  (top) as well as the associated image (bottom)

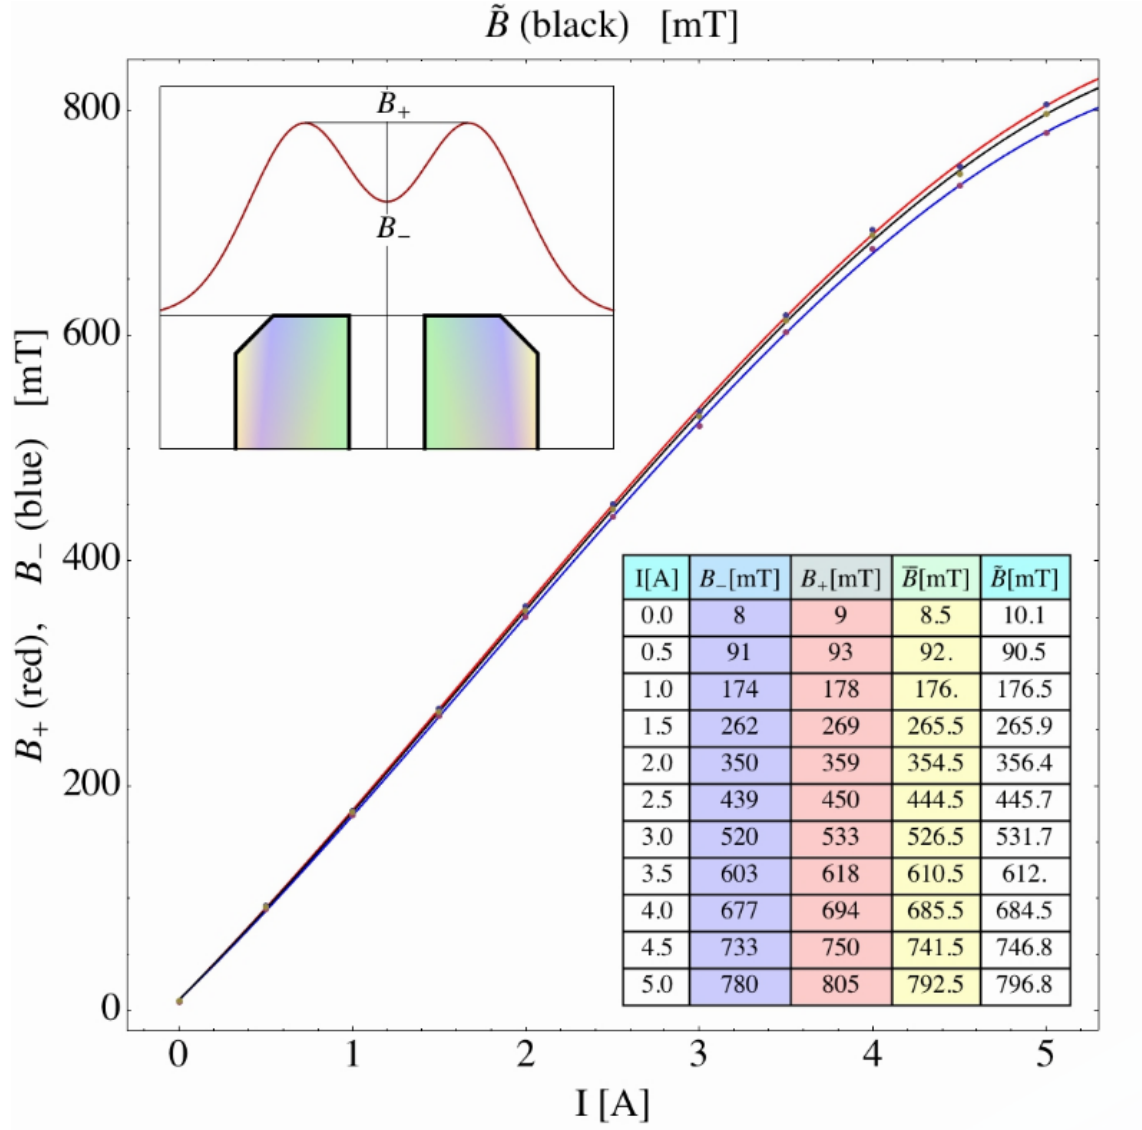


Figure 7: Calibration curve for the electromagnet used in the FP-inferometer

## 4 Results

### 4.1 Diffraction Patterns

In table 2, i have listed the measured diameter of the primary minimum, the predicted width of the slit based on this along with the width stated by the manufacturer in their data sheet. The length between the diffraction slit and the screen,  $R = 10.397 \pm 0.003m$ , was kept constant for the three single slits.

Similarly in table 4, the calculated diameter based on the inner minimum of the



intensity peaks and the length between the diffraction slit and the screen,  $R$ .

Lastly, in table 3 i have listed the observed peaks along with the expected number of visible peaks based on the Width and separation of the slits based on the manufacturers specifications.

Table 2: Single slit

Diameter of primary minima [cm]	Calculated Width of Slit [mm]	Stated Width of Slit [mm]
2.35	0.56	0.48
4.70	0.28	0.24
10.60	0.12	0.12

Table 3: Two parallel slits

Observed No. Peaks	Expected No. Peaks	Width of slits [mm]	Separation of slits [mm]
9	9	0.12	0.6
5	5	0.24	0.6
9	11	0.24	1.2

Table 4: Circular Slit

$d_1$ [cm]	$d_2$ [cm]	$d_3$ [cm]	$R$ [m]	Calculated slit diameter [mm]	Stated slit diameter [mm]
$1.2 \pm 0.1$	$2.4 \pm 0.1$	$3.6 \pm 0.1$	$1.302 \pm 0.003$	$0.14 \pm 0.01$	0.12
$1.0 \pm 0.1$	$2.0 \pm 0.1$	$3.1 \pm 0.1$	$2.159 \pm 0.003$	$0.26 \pm 0.01$	0.24
$1.3 \pm 0.1$	$2.6 \pm 0.1$	$3.8 \pm 0.1$	$4.961 \pm 0.003$	$0.51 \pm 0.01$	0.48

## 4.2 Spectral Lines

In tables 5, 6 are the wavelengths of the observed emission lines for hydrogen and helium respectively, calculated from  $\alpha_v, \alpha_h$  the left and right angular position of the emission lines and  $\theta$  denoting the difference between the two.

Table 5: Hydrogen Lines

$\alpha_v$	$\alpha_h$	$\theta$	$\lambda$ [nm]
$167.40 \pm 0.01^\circ$	$228.80 \pm 0.01^\circ$	$30.70 \pm 0.01^\circ$	$432.28 \pm 5.17$
$163.10 \pm 0.01^\circ$	$223.30 \pm 0.01^\circ$	$30.10 \pm 0.01^\circ$	$424.63 \pm 5.20$
$146.10 \pm 0.01^\circ$	$248.80 \pm 0.01^\circ$	$51.35 \pm 0.01^\circ$	$661.25 \pm 3.82$

Table 6: Helium Lines

$\alpha_v$	$\alpha_h$	$\theta$	$\lambda$ [nm]
$144.40 \pm 0.01^\circ$	$248.70 \pm 0.01^\circ$	$52.15 \pm 0.01^\circ$	$668.57 \pm 3.76$
$152.80 \pm 0.01^\circ$	$240.90 \pm 0.01^\circ$	$44.05 \pm 0.01^\circ$	$588.70 \pm 4.36$
$160.40 \pm 0.01^\circ$	$233.70 \pm 0.01^\circ$	$36.65 \pm 0.01^\circ$	$505.42 \pm 4.84$
$160.60 \pm 0.01^\circ$	$233.40 \pm 0.01^\circ$	$36.40 \pm 0.01^\circ$	$502.45 \pm 4.86$
$161.50 \pm 0.01^\circ$	$232.70 \pm 0.01^\circ$	$35.60 \pm 0.01^\circ$	$492.88 \pm 4.90$
$163.20 \pm 0.01^\circ$	$231.00 \pm 0.01^\circ$	$33.90 \pm 0.01^\circ$	$472.24 \pm 5.00$
$165.20 \pm 0.01^\circ$	$229.10 \pm 0.01^\circ$	$31.95 \pm 0.01^\circ$	$448.06 \pm 5.11$

### 4.3 Zeeman Effect

The pictures taken of the split diffraction lines are shown in Fig.8 and the associated results computed using the script "zeemanread.py" (see appendix A) are shown in Table 7, where  $I$  denotes the current Applied to the electromagnet resulting in  $\vec{B}(I)$ , determined from the calibration curve 7.  $\bar{d}_i$ , the diameters of rings  $i = 1, 2, 3$  found using zeeman.py (Included in appendix A),  $\tilde{\mu}_B$ , the resulting values for the bohr magneton, along with the mean value,  $\langle \tilde{\mu}_B \rangle$ .

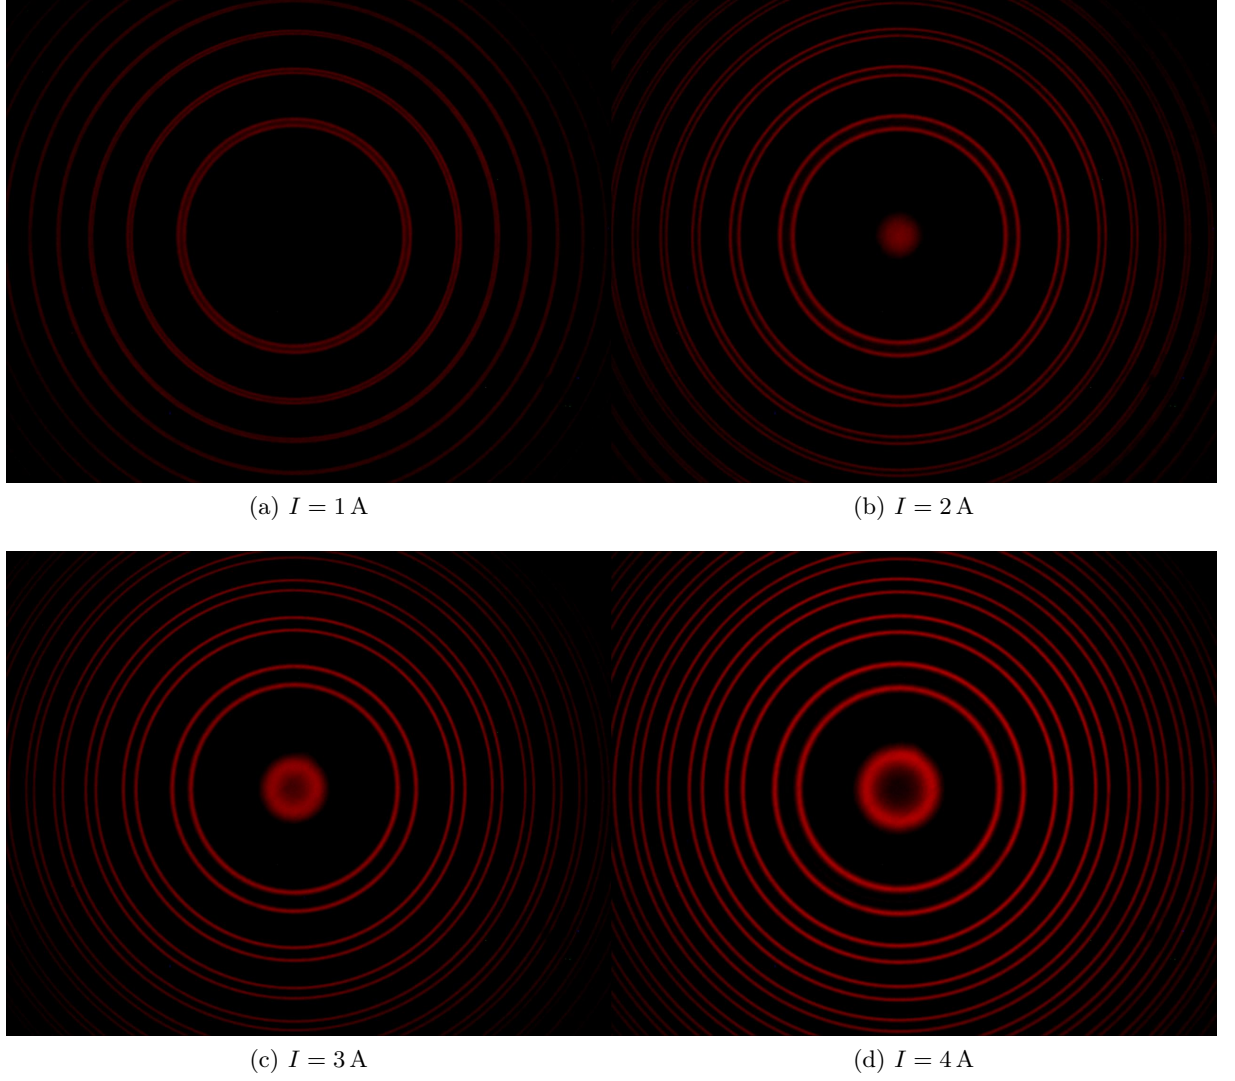


Figure 8: Split diffraction lines due to  $\sigma$ -transitions for different magnitudes of magnetic field

Table 7: Zeeman results

$I$ [A]	$\bar{B}(I)$ [mT]	$\bar{d}_1(I)$ [px]	$\bar{d}_2(I)$ [px]	$\bar{d}_3(I)$ [px]	$\tilde{\mu}_B$ [J T $^{-1}$ ]
4	685.5	$423.5 \pm 1$	$524.5 \pm 1$	$661.0 \pm 1$	$9.122 \pm 0.138 \cdot 10^{-24}$
3	526.5	$437.0 \pm 1$	$515.0 \pm 1$	$668.5 \pm 1$	$9.186 \pm 0.176 \cdot 10^{-24}$
2	354.5	$450.0 \pm 1$	$503.0 \pm 1$	$677.5 \pm 1$	$9.402 \pm 0.254 \cdot 10^{-24}$
1	176.0	$463 \pm 1$	$489 \pm 1$	$686 \pm 1$	$9.086 \pm 0.498 \cdot 10^{-24}$
					$\langle \tilde{\mu}_B \rangle = 9.199 \cdot 10^{-24}$

## 5 Discussion

### 5.1 Comparing stated and calculated slit widths based on intensity distribution

As mentioned in section 3.1, the experimental setup which was used for the measurements in tables 2, 4 were prone to systematic errors, to put it lightly. As such, it is very likely that the instrumental error due from measuring the distance between the slits and the screen, and the separation of the lines drawn where we "think" the minima were located on the projection screen are essentially negligible compared to the other uncertainties and sources of inaccuracies introduced in the experiment.

However, even though the uncertainties are not quite accounted for, the results do seem to correlate with the stated diameter of the slit. One interesting fact to note however, is that every single measurement results in a value greater than (or equal) to the stated width, suggesting that the results may be skewed uniformly in one direction.

### 5.2 Checking the observed emission lines with theory

For the balmer series, i expect 4 visible emission lines at 410nm, 434nm, 486nm and 656nm. Looking at our measured data, the emission line  $\lambda = 661.25 \pm 3.82 \text{ nm}$  falls reasonably close to an expected emission line, but its range of uncertainty does not quite overlap. As mentioned before, it was noted by my partner that the lines were difficult to see clearly. This likely introduces another source of uncertainty in the measurement which has not been accounted for in the uncertainty calculation. Which along with the already existing instrumental uncertainty makes the two remaining spectral lines highly inaccurate, and matching the two with their theoretical counterpart becomes somewhat difficult due to the significant overlap between the two values and the fact that both of them may be attributed to the expected emission line at 434nm.

On the other hand, the emission lines from helium were quite distinct, and the observed lines all match up with the expected lines within the uncertainties.

Therefore, it is obvious that the intensity of the spectrum, and the environment<sup>1</sup> in which the measurements are made pays a significant part in the accuracy of the measurements. Additionally, a significant portion of the "expected" lines did not show up at all, presumably due to a low intensity, which as seen in table 3 can lead to "false" conclusions, where in the last row, observations pointed to 9 intensity peaks, but theory predicted 11. The two remaining peaks were simply too dim to be seen.

### 5.3 Comparison of measured $\mu_B$ and reference value

CODATA states that the value of the Bohr magneton,  $\mu_B = 9.274009994(57) \times 10^{-24} \text{ J T}^{-1}$ . The values found in table 7 all overlap with this value within their uncertainties, and as such, it seems a fair assumption that the main contributor of uncertainty was the due to the limitations of image processing, since i could only determine the inner and

---

<sup>1</sup>As in; the amount of light pollution present

outer diameter of the rings based on the discrete pixel values. Further, it seems as the current rises, the measured value of  $\mu_B$  tends toward the CODATA value, based on these few measurements. the uncertainty also becomes smaller, which further strenghtens the assumption that the main contributor of uncertainty is that of  $\sigma$ .

## 6 Conclusion

When performing experiments of this nature, quantifying the potential errors that may occur outside of the instrumental uncertainties seems quite a difficult task. Regardless, the deviation between what is expected and what is measured using these techniques seems to only deviate by a few percent, even when the methodology is seemingly prone to errors. And ultimately, considering the scales at which these macroscopic experiments measure, it is notable that the measurements "only" seems to deviate by a few percent of what is expected.

## References

- [1] D. J Griffiths. *Introduction to Quantum Mechanics*. Cambridge University Press, 2nd edition.
- [2] G. L Squires. *Practical Physics*. Cambridge University Press, 4th edition.
- [3] Wikipedia contributors. Energy–momentum relation — Wikipedia, the free encyclopedia. [https://en.wikipedia.org/w/index.php?title=Energy%E2%80%93momentum\\_relation&oldid=839578451](https://en.wikipedia.org/w/index.php?title=Energy%E2%80%93momentum_relation&oldid=839578451), 2018. [Online; accessed 14-May-2018].
- [4] Wikipedia contributors. Matter wave — Wikipedia, the free encyclopedia. [https://en.wikipedia.org/w/index.php?title=Matter\\_wave&oldid=830205957](https://en.wikipedia.org/w/index.php?title=Matter_wave&oldid=830205957), 2018. [Online; accessed 14-May-2018].

## A Scripts

scripts/zeemanread.py

```
1 #!/usr/bin/env python
2 # -*- coding: utf-8 -*-
3 '''
4 Finds diameter of diffraction rings from Zeeman experiment
5 in the FY2150 Waveoptics lab
6 '''
7
8 import numpy as np
9 import matplotlib.pyplot as plt
10 from matplotlib.image import imread
11 from scipy import ndimage
12 # from PIL import Image
13 # import skimage.morphology as morph
14 # from skimage import filters
15
16
17 def rgb2gray(rgb):
18     '''
19     Converts shape=(N,M,rgb) array to (N, M) grayscale array
20     '''
21     return np.dot(rgb[..., :3], [0.299, 0.587, 0.114]).astype(int)
22
23
24 def gray2binary(gray, limBW=128):
25     """Converts grayscale image to binary grayscale of 0 OR 255
26     image must be array of shape=(N, M)
27     gray: (N, M) array
28     limBW: threshold limit between B/W
29     """
30     bw = np.asarray(gray).copy()
31     bw[bw < limBW] = 0      # Black
32     bw[bw >= limBW] = 255  # White
33     return bw
34
35
36 def readZeeman(filename, lowerThresh, higherThresh, g2bThresh=20):
37     #import skimage.color
38     if isinstance(filename, basestring) is False:
39         raise TypeError("Filename argument not string")
40     img = imread(filename)
41     bwImg = rgb2gray(img)
42     binImg = gray2binary(bwImg, 21)    #17 works
43     binCrop = binImg[475:525, 0:-1]
44
45     plt.imshow(bwImg, cmap=plt.get_cmap('gray'))
46     plt.close()
47     plt.axhline(0, linestyle="-", color="r")
48     plt.imshow(binCrop, cmap=plt.get_cmap('gray'))
49     plt.close()
```

```

50 edge_horizont = ndimage.sobel(binCrop, 0)
51 edge_vertical = ndimage.sobel(binCrop, 1)
52 magnitude = np.hypot(edge_horizont, edge_vertical)
53 outlines = gray2binary(magnitude, g2bThresh)
54 plt.imshow(outlines, cmap=plt.get_cmap("gray"))
55
56 outline_indeces = []
57
58 for i in range(len(outlines)):
59     outline_indeces_row = [0] # Setting first element to zero to make
60 loop work
61     for j in range(len(outlines[i])):
62         if outlines[i, j] == 0:
63             pass
64         else:
65             if abs(j - outline_indeces_row[-1]) < 4:
66                 pass
67             else:
68                 outline_indeces_row.append(j)
69                 outline_indeces_row.pop(0) # remove the zero
70                 outline_indeces.append(outline_indeces_row)
71 d_outlines = outline_indeces[30]
72
73 plt.plot(d_outlines, np.zeros_like(d_outlines) + 30, "ro")
74 plt.title("Chose lower and higher threshold")
75 plt.close()
76
77 d_outlines = filter(lambda f: f < higherThresh and f > lowerThresh,
78 d_outlines)
79
80 if len(d_outlines)%2 != 0:
81     raise ValueError("outlines not even number, check threshold")
82
83 d_center = []
84 counter = 0
85 while counter < len(d_outlines):
86     d_center.append((d_outlines[counter] + d_outlines[counter + 1])
87 / 2.0)
88     counter += 2
89 plt.imshow(binCrop, cmap=plt.get_cmap("gray"))
90 plt.plot(d_center, np.zeros_like(d_center) + 30, "ro")
91 plt.yticks([])
92 plt.xticks(d_center, rotation=-25)
93 plt.close()
94
95 d_3 = d_center[-1] - d_center[0]
96 d_2 = d_center[-2] - d_center[1]
97 d_1 = d_center[-3] - d_center[2]
98
99 return d_1, d_2, d_3
100
101 d14, d24, d34 = readZeeman("figs/ZEEMAN4A.jpg", 255, 955)

```

```

100 d13, d23, d33 = readZeeman("figs/ZEEMAN3A.jpg", 255, 955)
101 d12, d22, d32 = readZeeman("figs/ZEEMAN2A.jpg", 255, 955)
102 #readZeeman("figs/ZEEMAN1A.jpg", 255, 955, 100)
103
104
105
106 def readZeemanAlt(filename):
107     #import skimage.color
108     if isinstance(filename, basestring) is False:
109         raise TypeError("Filename argument not string")
110     img = imread(filename)
111     bwImg = rgb2gray(img)
112     binImg = gray2binary(bwImg, 17)
113     binCrop = binImg[475:525, 0:-1]
114     bwCrop = bwImg[475:525, 0:-1]
115     bwRow = bwCrop[30]
116     plt.imshow(bwImg, cmap=plt.get_cmap('gray'))
117     plt.close()
118     plt.subplot(212)
119     plt.axhline(0, linestyle="-", color="r")
120     plt.imshow(bwCrop, cmap=plt.get_cmap('gray'))
121     plt.xlabel("Pixel")
122     plt.yticks([])
123     plt.subplot(211)
124     plt.plot(bwRow)
125     plt.ylabel("Intensity"); plt.xlabel("Pixel")
126     plt.tight_layout()
127     plt.savefig("zeeman_1a_intensity.png")
128     plt.close()
129
130 readZeemanAlt("figs/ZEEMAN1A.jpg")
131
132 def mu_B(B, d1, d2, d3):
133     hc = 1.98644568E-25 # [CODATA]
134     sigma = float(d2**2 - d1**2) / (d3**2 - d1**2)
135
136     tx4 = 3.0 * 4.0e-3
137
138     #errors
139     Dd = 1
140     P1 = 2 * Dd * np.sqrt(d2**2 + d1**2) / (d2**2 - d1**2)
141     P2 = 2 * Dd * np.sqrt(d3**2 + d1**2) / (d3**2 - d1**2)
142     sigma_err = sigma * np.sqrt(P1**2 + P2**2)
143
144     print "sigma error", sigma_err
145     muB = (hc / tx4) * (sigma / B)
146     muB_err = muB * (sigma_err / sigma)
147     print muB_err
148     return muB, muB_err
149
150 mu_B_4, err4 = mu_B(685.5e-3, d14, d24, d34)
151 mu_B_3, err3 = mu_B(526.5e-3, d13, d23, d33)
152 mu_B_2, err2 = mu_B(354.5e-3, d12, d22, d32)

```



```

153 mu_B_1, err1 = mu_B(176.0e-3, 463, 489, 686)
154
155 def print_diameters(list):
156     n = 1
157     for item in list:
158         print "d_%i = %.1f" % (n, item)
159         n += 1
160     return
161
162 print "\n4A Diameters"
163 print_diameters([d14, d24, d34])
164
165 print "\n3A Diameters"
166 print_diameters([d13, d23, d33])
167
168 print "\n2A Diameters"
169 print_diameters([d12, d22, d32])
170
171 print "\nMu_B:\n"
172 print "I = 4A -> %.3e" % mu_B_4, err4
173 print "I = 3A -> %.3e" % mu_B_3, err3
174 print "I = 2A -> %.3e" % mu_B_2, err2
175 print "I = 1A -> %.3e" % mu_B_1, err1
176
177
178 print "Mean mu_B %.3e" % np.mean([mu_B_4, mu_B_3, mu_B_2, mu_B_1])

```