

Polarization

FYS2150 Lab Report

Nicholas Karlsen

June 1, 2018

Abstract

Studying the properties of linearly and circularly polarized light and testing how well the properties match up to theoretical predictions.

1 Introduction

2 Theory

2.1 Birefringence

Certain materials, such as Calcite crystal exhibit birefringent behavior, where it effectively has two separate refractive indices for light polarized at right angle to each other, meaning that when unpolarized light is passed through the crystal, two displaced images will be visible. Birefringence can occur for different reasons, but in the case of crystalline Calcite, it is due to the uniaxial geometry of its lattice (See fig. 1). Where light which is polarized is perpendicular to this optical axis will follow a certain, set refractive index, regardless of the crystals orientation.

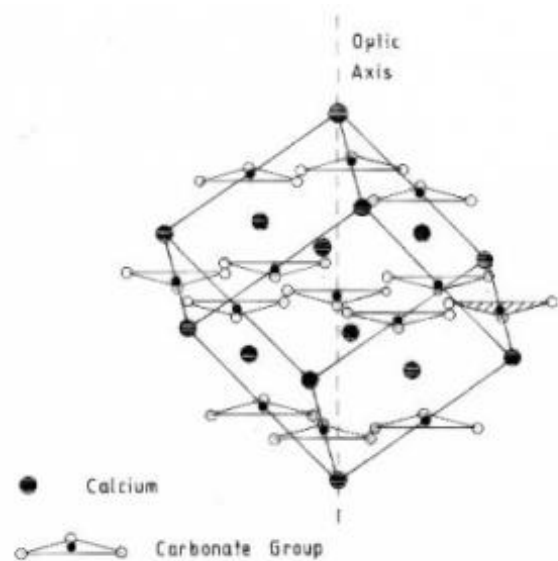


Figure 1: Crystalline structure of calcite (Source: <http://lecturedemo.ph.unimelb.edu.au/Optics/Crystal-optics/Oh-1-Calcite-Crystal-Model/Calcite-Diagram>)

3 Experimental Procedure

In order to minimize the effects that ambient light may have on the following experiments, the windows in the room were covered up and all lights not related to the experiment were turned off whilst data was being recorded, or observations were made.

In all subsequent parts of this report, the spectral lamp to which i refer is a sodium spectral lamp emitting close to monochromatic light of wavelength $\lambda = 589nm$ in air.

3.1 Checking the polarization of the spectral lamp

In order to determine whether or not the light emitted from the spectral lamp is polarized, the intensity of light was measured using a luxmeter[1] after having gone through a polarization filter of variable angle acting as an analyzer, depicted in Fig 2. When changing the angle of the analyzer, we defined a positive and negative direction, which was kept for all subsequent measurements using polarization filters. The angle of the polarization filter was changed in 10° increments in the range -90° to 90° and the intensity of the light measured by the luxmeter was noted for each angle.

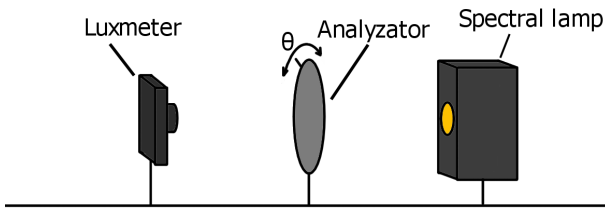


Figure 2: Apparatus to test the polarization of light emitted from a spectral lamp using a polarization filter with variable angle θ as an analyzer and measuring the intensity of the filtered light using the luxmeter.

3.2 Testing Malus' law

In order to test Malus' law experimentally, we added a second polarization filter to our existing apparatus (see sect. 3.1), setting the first polarization filter to a fixed angle at 0° whilst the second one is used as the analyzer, depicted in Fig. 3. In order to minimize the effects that ambient light and other potential contaminants, the apparatus was kept as tightly stacked as possible. The intensity registered by the luxmeter was again measured in 10° increments in the range -90° to 90° which was noted in the lab journal.

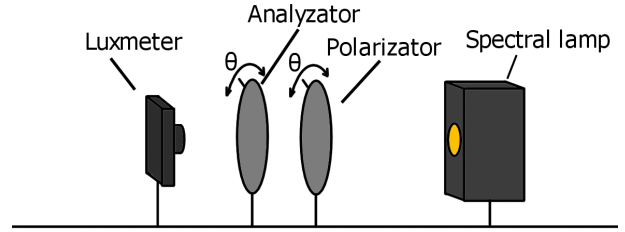


Figure 3: Apparatus to test Malus' law, where the polarizer is kept at a constant angle while the analyzer is varied.

Afterwards, a third polarization filter was placed after the analyzer and set to a fixed angle at 90° (see Fig. 4). The angle of the analyzer was once again varied as before, and the intensity recorded by the luxmeter was noted in the journal.

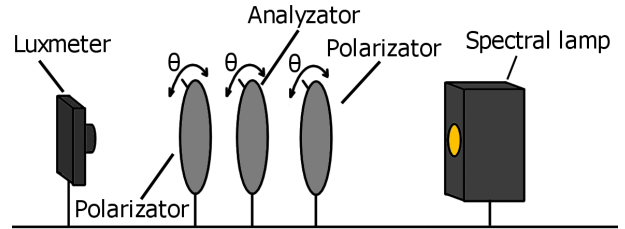


Figure 4: Alternative apparatus to test Malus' law, where the two polarizers are kept at a constant angle while the analyzer is varied.

3.3 Reflection of polarized light

In order to test how the intensity of S and P-polarized light, reflected from a prism with a varying angle of incidence, a modified spectroscope was used as shown in Fig. 5. The angle, and intensity was recorded digitally on a computer using capstone. The angle recorder only measured the change in angle from starting the recording, so there was a notable uncertainty in zeroing the apparatus before starting. The sights, used to read the angle manually were blocked by a cable, such that it could not be used properly, and the geometry of the spectrometer itself was not perfect. For large angles, i.e when the incident line is nearly parallel with the plane of reflection, it was observed that some of the light was transmitted through the prism rather than being reflected. This is likely due to the prism not being properly

aligned with the laser, which was reflected in the results. As such, the data for large angles ϕ do not follow what is expected, which must be taken into account when reading the results.

As for making the measurements, the polarisator was set either parallel or tangential to the reflective plane of the prism and the prism was adjusted such that the reflective plane was parallel to the laser beam. Captstone was then started and the luxmeter and prism were slowly rotated until the angle between the laser and the luxmeter was roughly 65° . This was repeated for both S and P-polarized light.

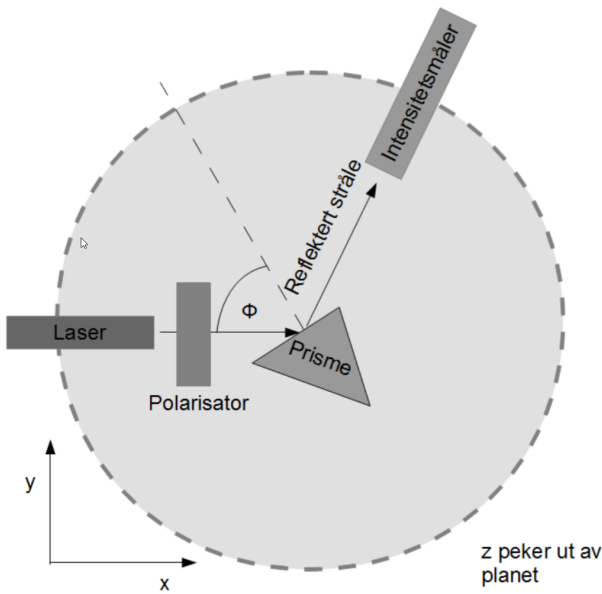


Figure 5: Modified spectrometer used to test how the intensity of reflected, polarized light changes with the angle of incidence.

3.4 Light transmitted through an angled glass plate

3.5 Observing birefringence in crystalline Calcite

We had two samples of crystalline calcite. One of which was naturally occurring sample, and another which was cut tangentially to its optical axis on two opposing sides. Both of the crystals were transparent¹, and text was clearly readable when looking through them. The crystals were placed

¹I believe the particular type of calcite used is named Iceland spar, or at the very least, it looks quite similar to it. See https://en.wikipedia.org/wiki/Iceland_spar

on an illuminated panel, on top of which was some text printed on transparent plastic. We then observed the text by looking through the two calcite crystals, both with and without a polarization filter acting as an Analyzer.

Afterwards, we used an apparatus as the one depicted in Fig. INSERT REFERENCE TO FIGURE HERE to investigate how the crystals affected a thin beam of light which is passed through it. The crystals were held in between the analyser and lens, and we investigated how the intensity of the dots projected on the screen varied as we changed the angle of the analyzer.

3.6 Circular polarization of light using Calcite waveplates

In order to investigate the effect of the polarization of light emitted by the spectral lamp when passed through $\lambda/2$ waveplates, where $\lambda = 589$, the most abundant wavelength of visible light emitted from the sodium spectral lamp, an apparatus as depicted in Fig INSERT REFERENCE was prepared. The apparatus allowed for the rotation of the waveplates along the axis parallel to the light being passed through it from the spectral lamp. There was however no markings on the waveplate to indicate its current orientation.

4 Results

The intensity measurements presented in table 1, where light from a spectral lamp is passed through a single polarization filter has a standard deviation of 19, which is used as the estimated uncertainty for further measurements made with the luxmeter.

Table 1: Measured intensity when passing unpolarized light through a single polarization filter, θ denoting the angle of the filter. Apparature depicted in Fig. 2

θ [deg]	Intensity [Lux]
0	705
-10	701
-20	706
-30	718
-40	726
-50	734
-60	743
-70	751
-80	756
-90	759
10	703
20	713
30	719
40	726
50	736
60	745
70	753
80	758
90	754

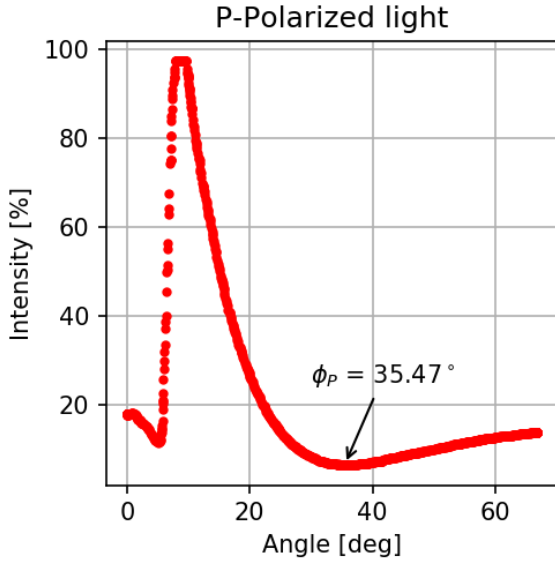


Figure 6: Intensity profile due to p-polarized light, where ϕ_P denotes the Brewster angle. Note that the measurements for angles prior to the peak are to be negated as discussed in the experimental section.

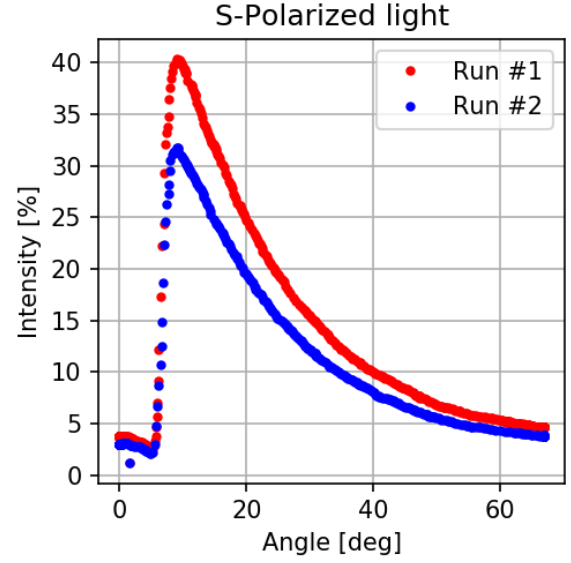


Figure 7: Intensity profile due to p-polarized light from two separate attempts of the experiment. Note that the measurements for angles prior to the peak are to be negated as discussed in the experimental section.

4.1 Observations when looking at light passed through crystalline Calcite

When observing text through the naturally occurring sample of crystalline calcite, the birefringence of calcite was observed by the text splitting into two, seemingly identical copies of each other. When placing a the small polarisation filter on top of the crystal and turning it, there were specific angles in which the text disappeared, one for each image. Without making any measurements, these angles seemed to be roughly 90° relative to each other. Meaning the two images of the text are tangentially polarized relative to each other.

When placing the sample in the aparature depicted in Fig. INSERT REFERENCE, there were two small circles of light projected onto the screen when the analyzer was set to 0° and 90° . Setting the analyzer to $+45^\circ$ resulted in one of the circle disappearing, and setting it to -45° made the other circle disappear.

When looking at the fabricated calcite sample, which was cut tangential to its optical axis. Only one image of the text was visible, and rotating a polarizing filter on top of it had no visible effect on the image. When investigating further, again us-

ing the aparature depcited in Fig. INSERT REFERENCE, there was only one circle projected onto the screen and rotating the analyzator had no visible effect on its illuminosity.

5 Discussion

6 Conclusion

References

- [1] Extech Instruments. Model 401025 digital light meter, http://www.uio.no/studier/emner/matnat/fys/FYS2150/v18/kursmateriell/datablader-og-brukermanualer/extech_lysma%CC%8Aler_401025_manual.pdf. http://www.uio.no/studier/emner/matnat/fys/FYS2150/v18/kursmateriell/datablader-og-brukermanualer/extech_lysma%CC%8Aler_401025_manual.pdf, 2005. [Online; accessed 30-May-2018].