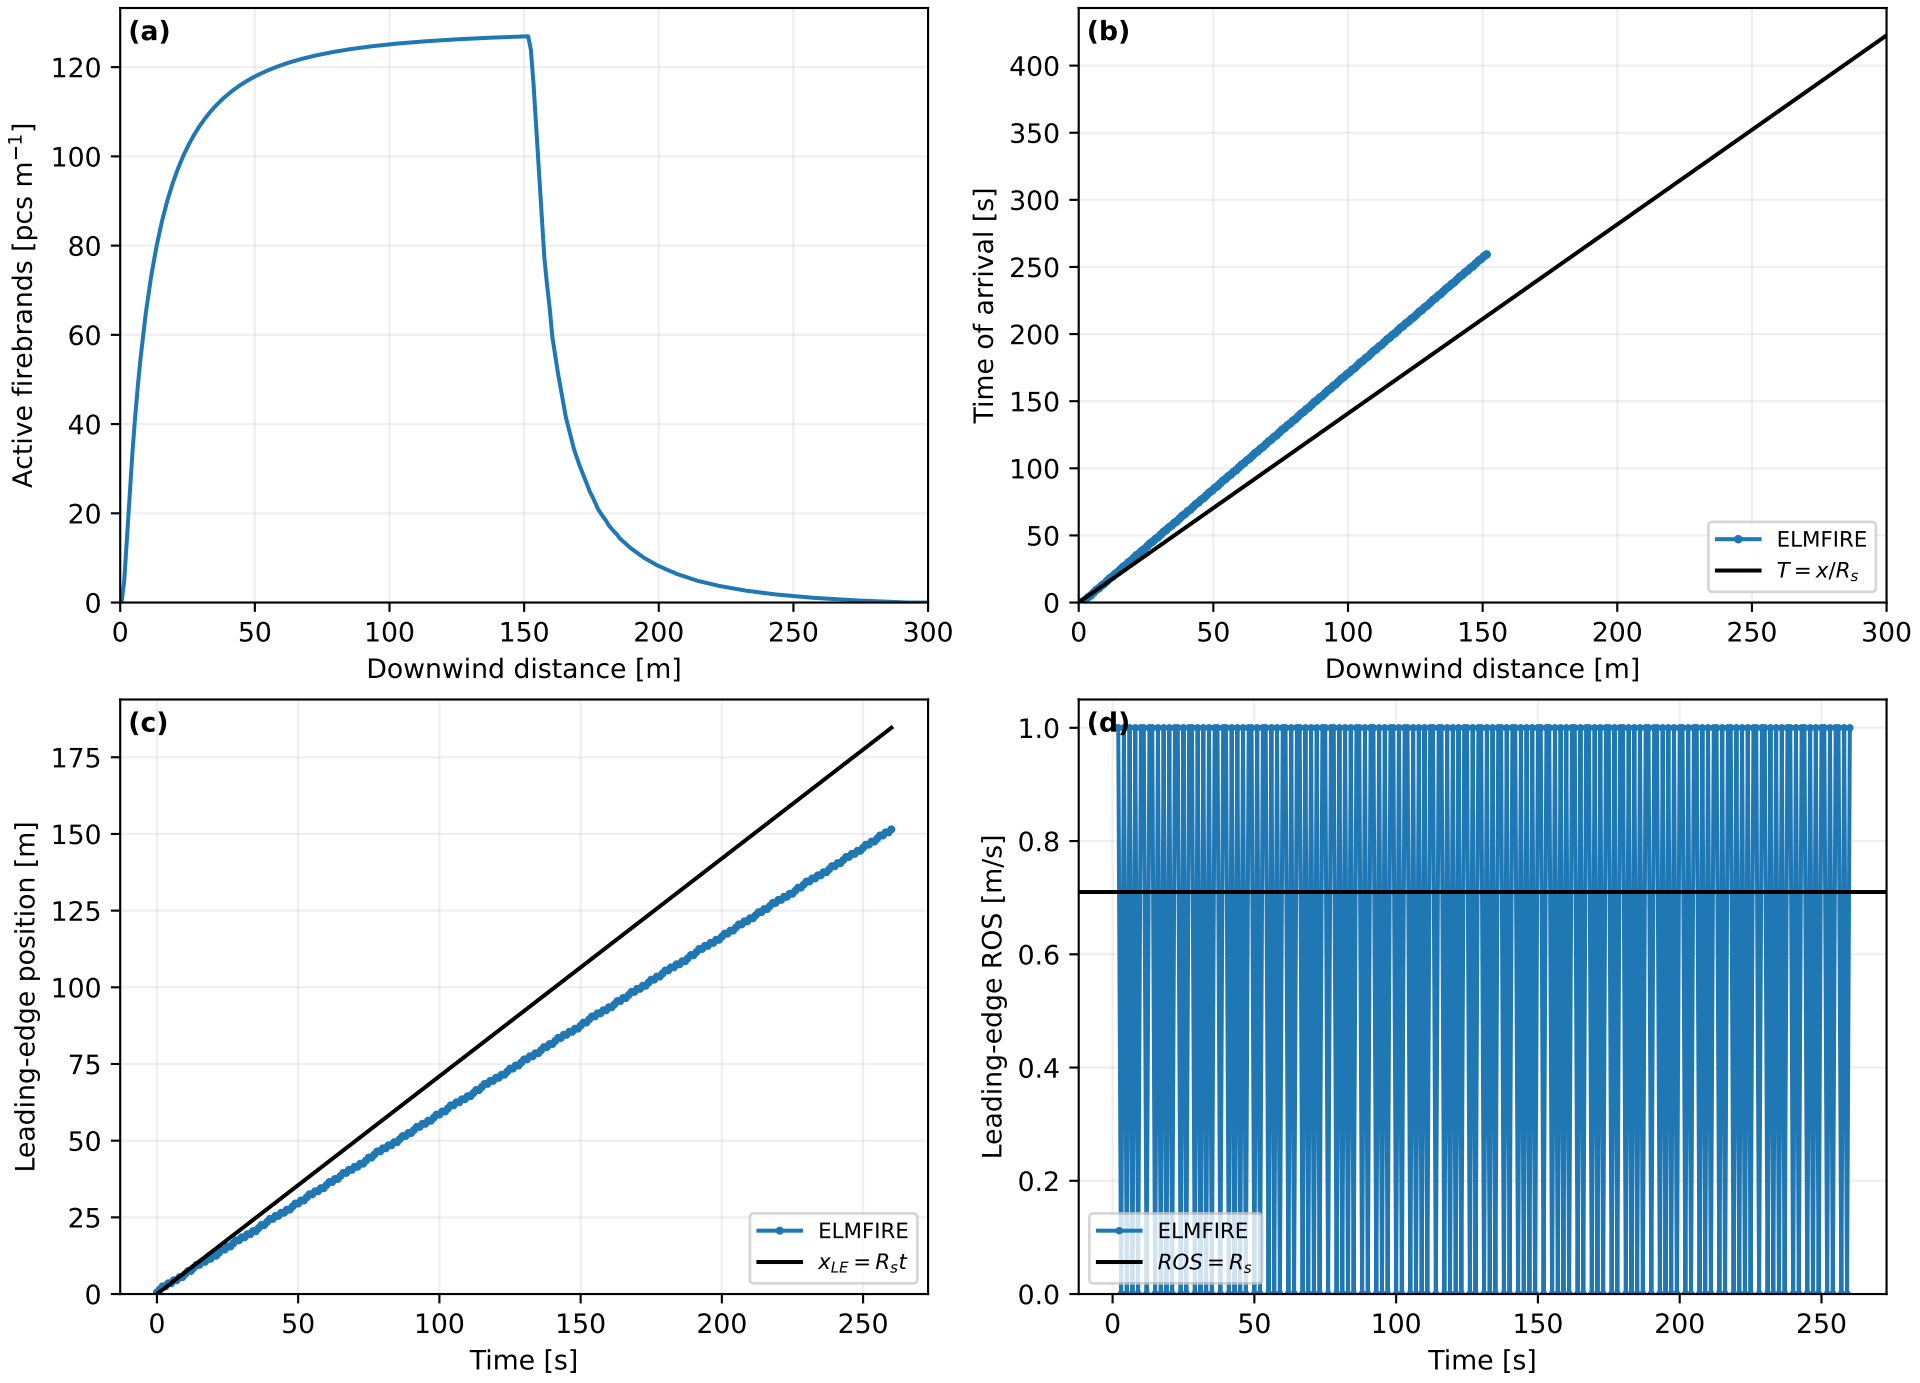
(a)
Active firebrands [pcs m^{-1}]
Downwind distance [m]
(b)
Time of arrival [s]
Downwind distance [m]
ELMFIRE
$T = x/R_s$
(c)
Leading-edge position [m]
Time [s]
ELMFIRE
$x_{LE} = R_s t$
(d)
Leading-edge ROS [m/s]
Time [s]
ELMFIRE
$ROS = R_s$