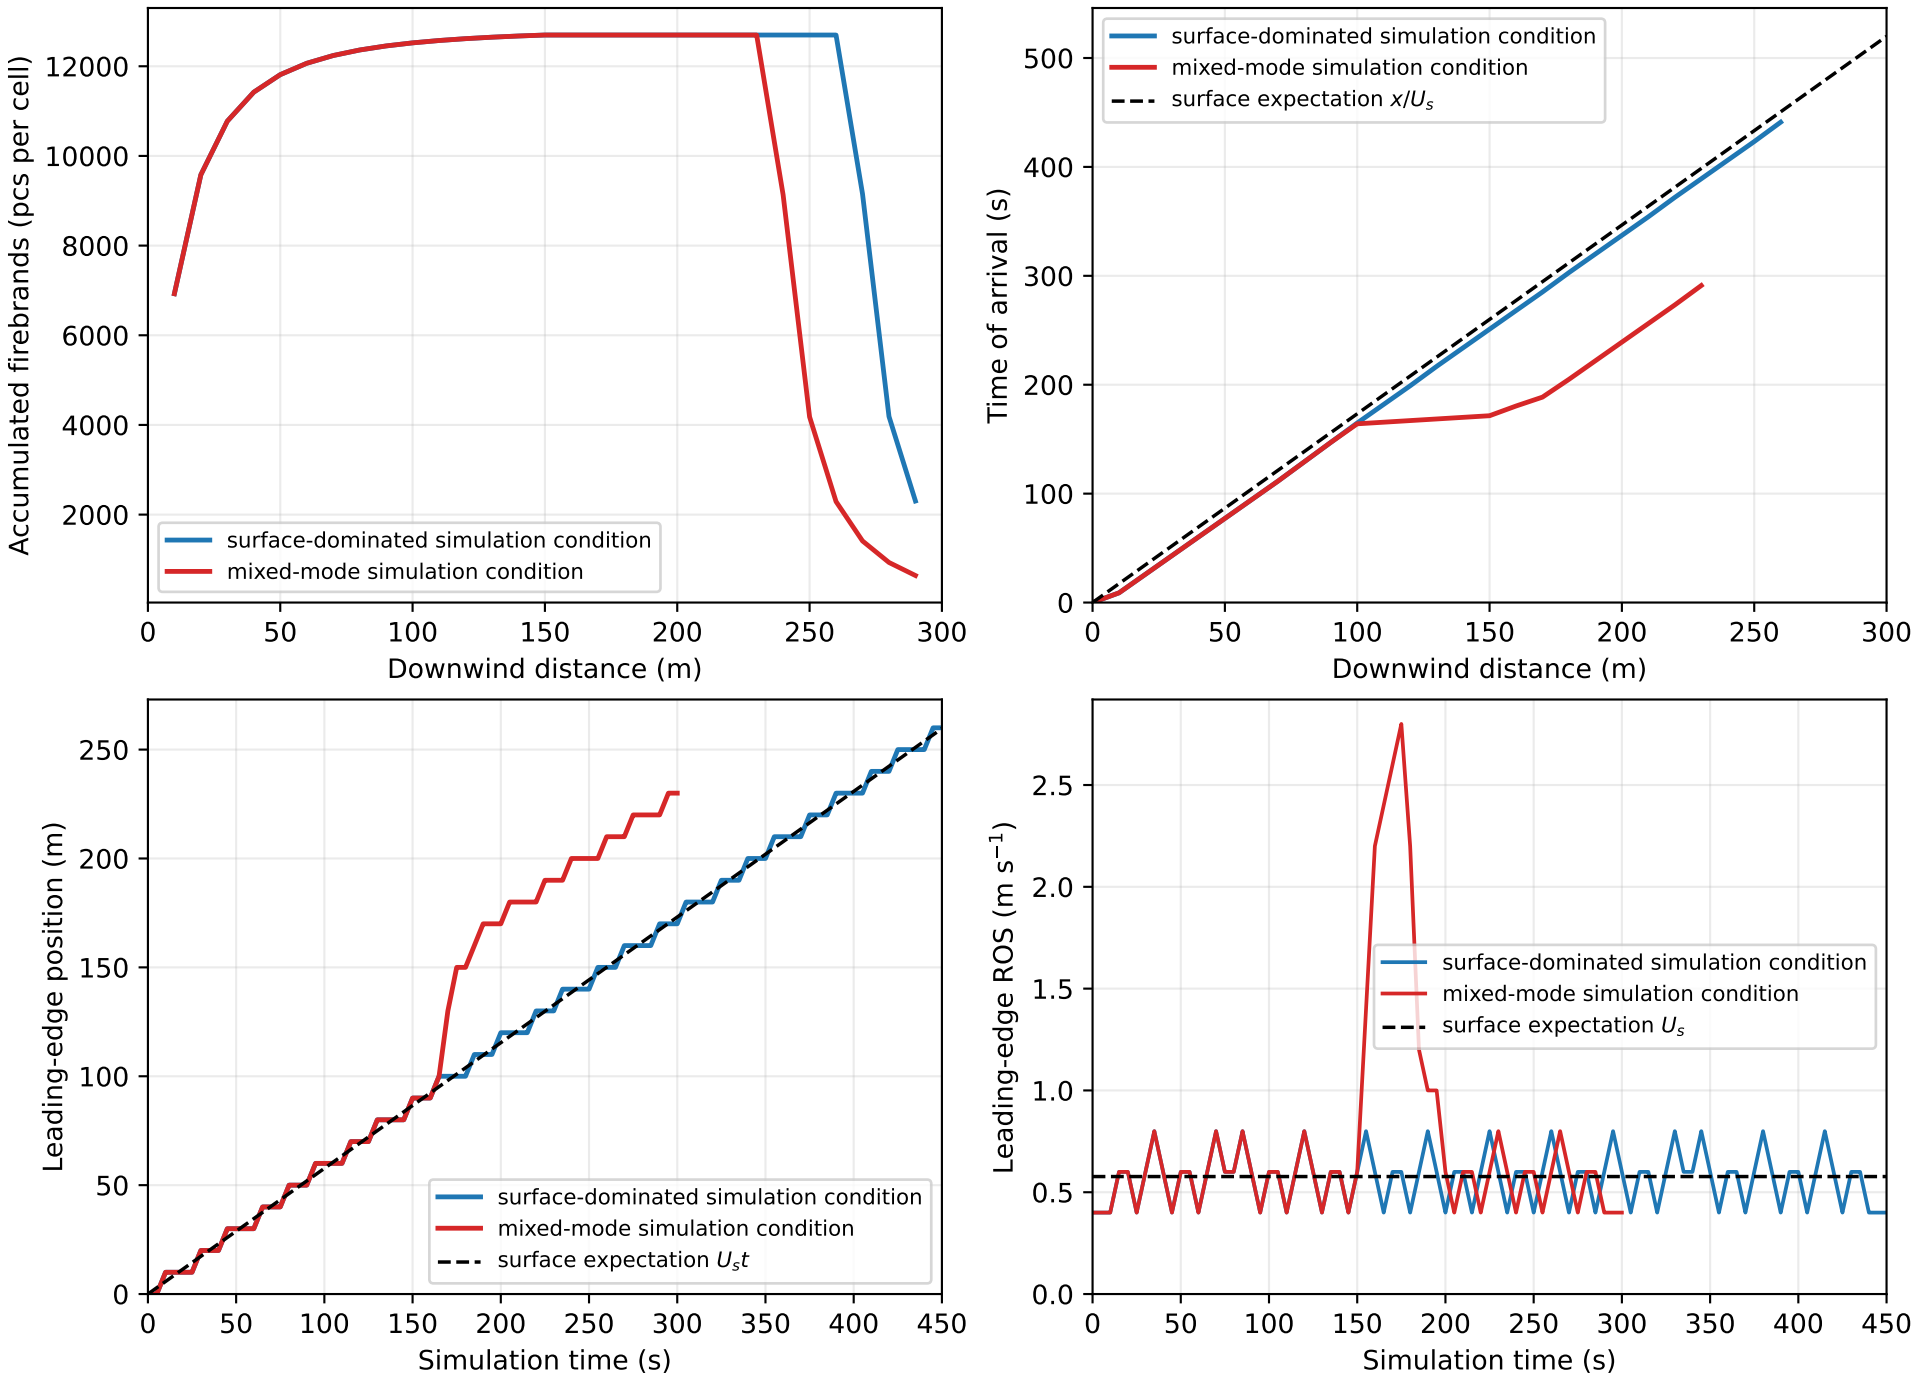
Accumulated firebrands (pcs per cell)
12000
10000
8000
6000
4000
2000
0
50
100
150
200
250
300
Downwind distance (m)
surface-dominated simulation condition
mixed-mode simulation condition
Time of arrival (s)
500
400
300
200
100
0
surface expectation x/U_s
Leading-edge position (m)
250
200
150
100
50
surface expectation $U_s t$
Simulation time (s)
Leading-edge ROS (m s^{-1})
2.5
2.0
1.5
1.0
0.5
0.0
surface expectation U_s