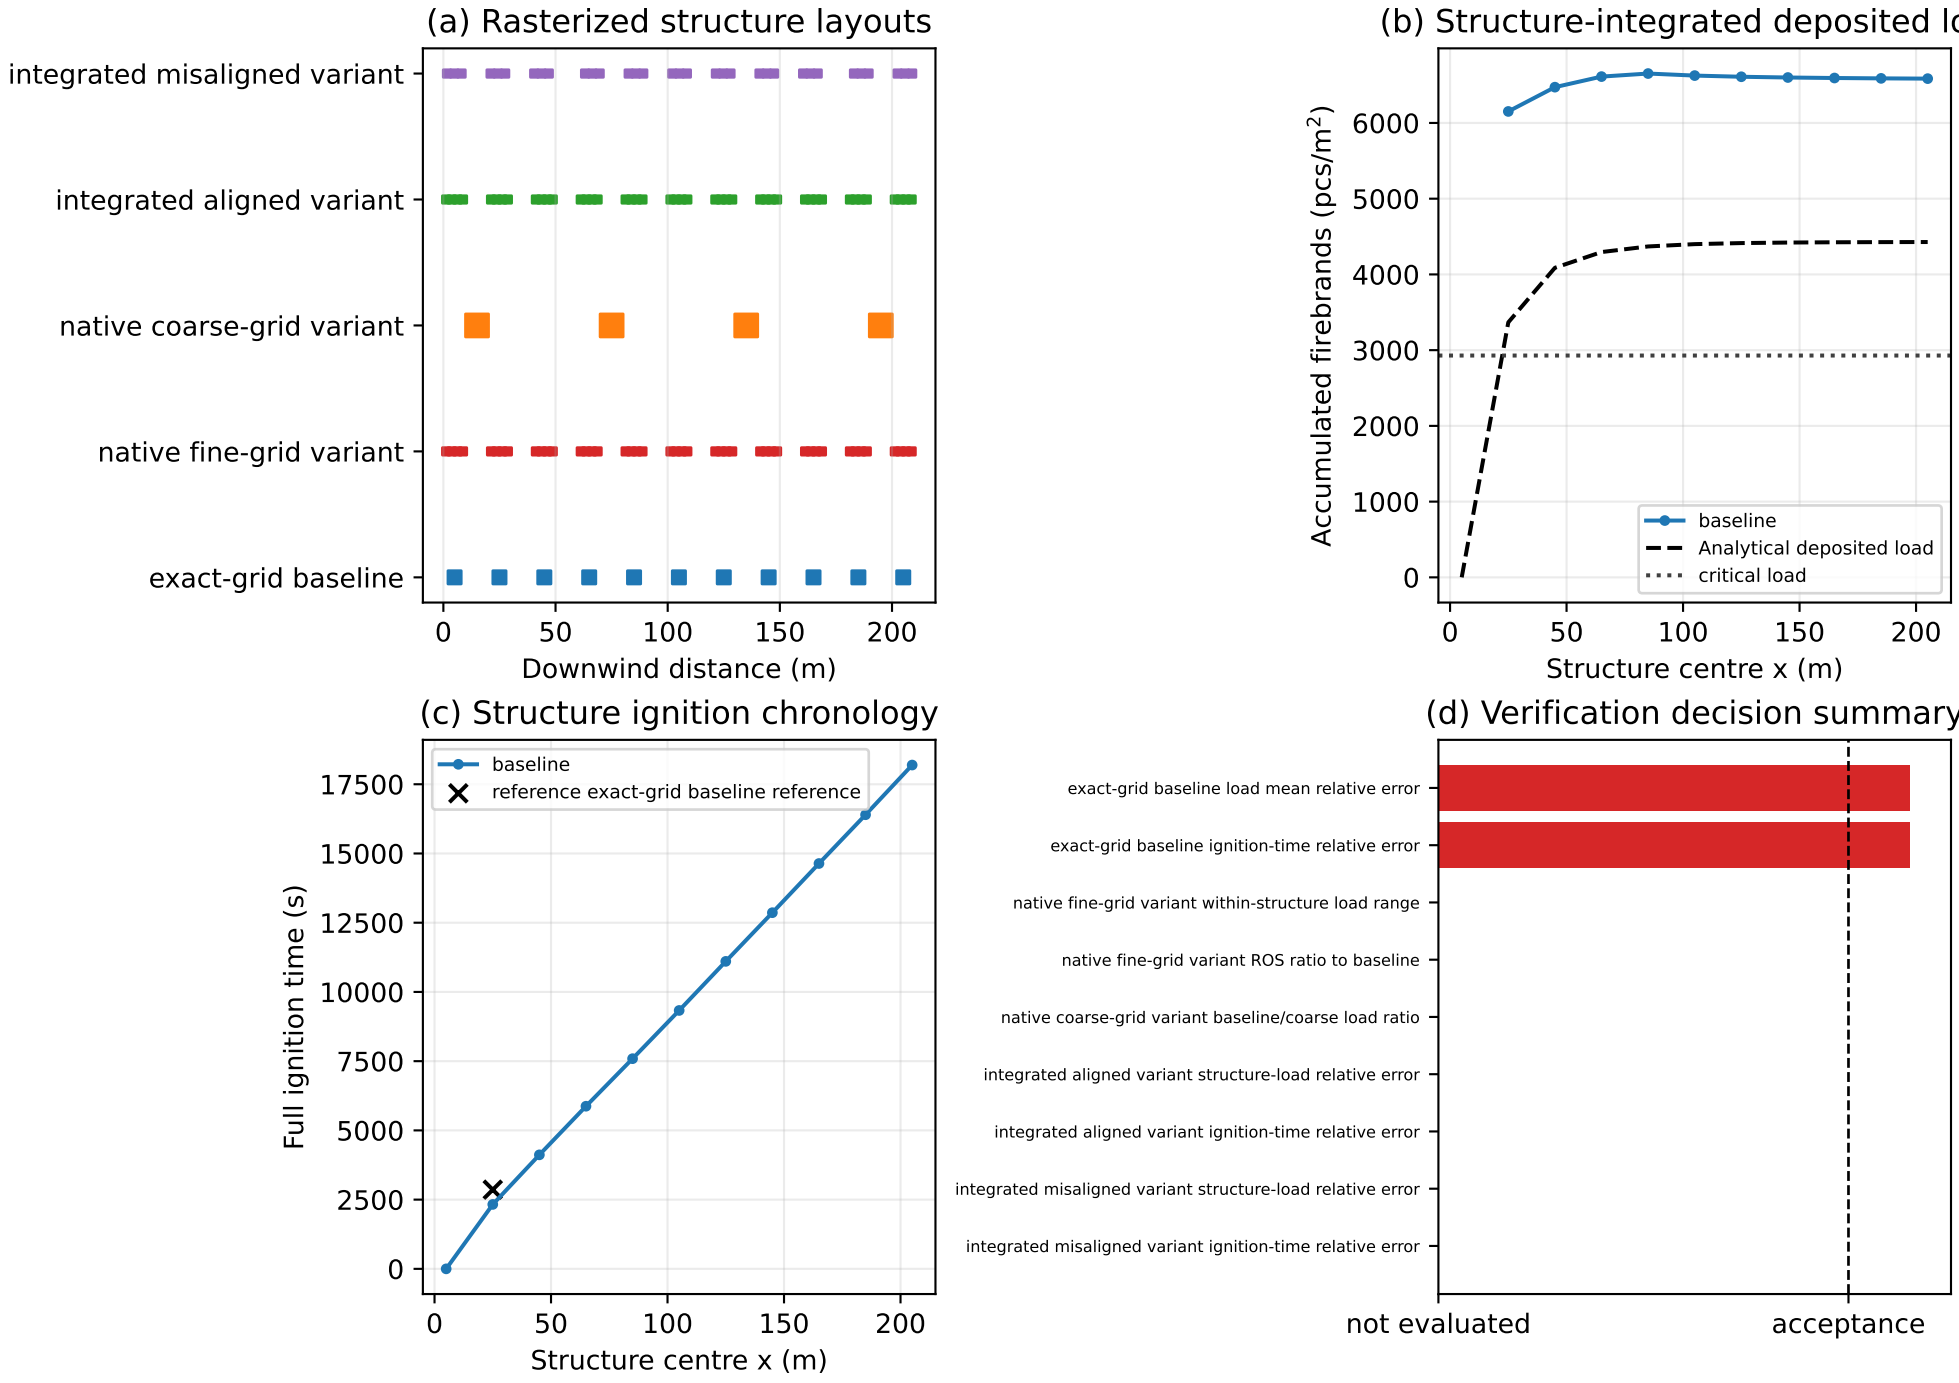
(a) Rasterized structure layouts
integrated misaligned variant
integrated aligned variant
native coarse-grid variant
native fine-grid variant
exact-grid baseline
0
50
100
150
200
Downwind distance (m)
(b) Structure-integrated deposited lo
Accumulated firebrands (pcs/m^2)
0
1000
2000
3000
4000
5000
6000
baseline
Analytical deposited load
critical load
0
50
100
150
200
Structure centre x (m)
(c) Structure ignition chronology
baseline
reference exact-grid baseline reference
Full ignition time (s)
0
2500
5000
7500
10000
12500
15000
17500
0
50
100
150
200
Structure centre x (m)
(d) Verification decision summary
exact-grid baseline load mean relative error
exact-grid baseline ignition-time relative error
native fine-grid variant within-structure load range
native fine-grid variant ROS ratio to baseline
native coarse-grid variant baseline/coarse load ratio
integrated aligned variant structure-load relative error
integrated aligned variant ignition-time relative error
integrated misaligned variant structure-load relative error
integrated misaligned variant ignition-time relative error
not evaluated
acceptance