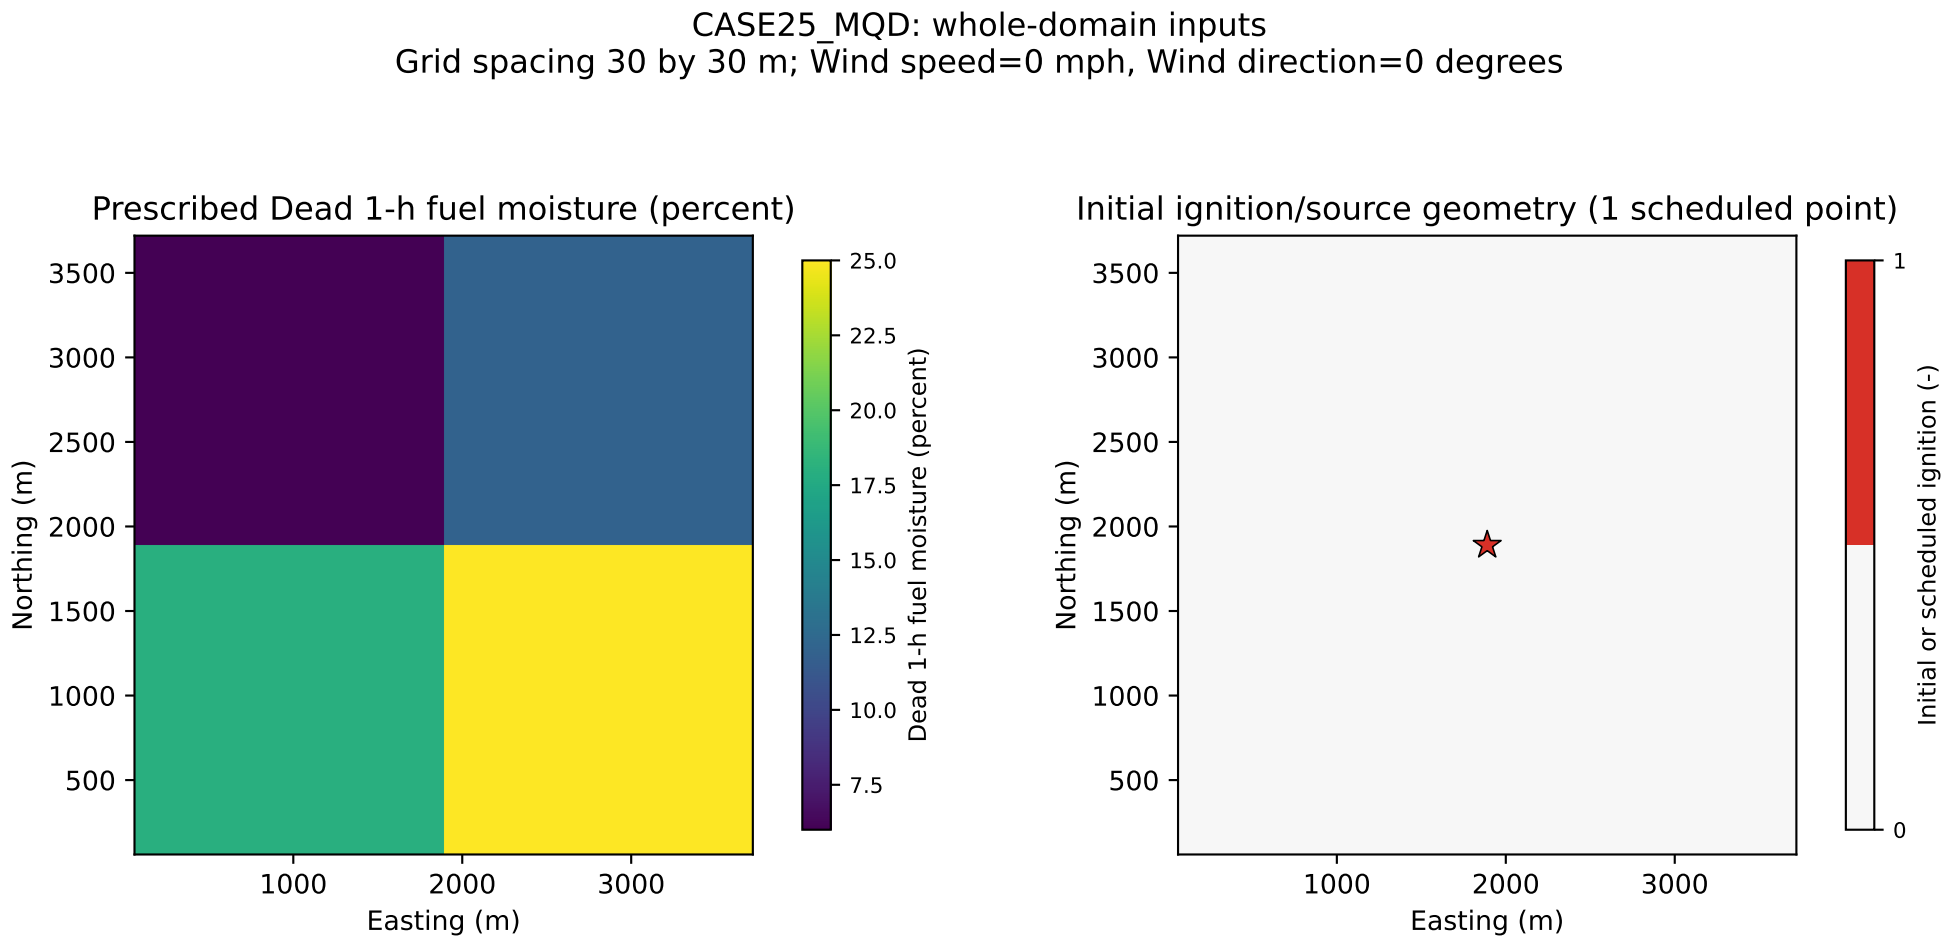
CASE25_MQD: whole-domain inputs
Grid spacing 30 by 30 m; Wind speed=0 mph, Wind direction=0 degrees
Prescribed Dead 1-h fuel moisture (percent)
Northing (m)
Easting (m)
Dead 1-h fuel moisture (percent)
Initial ignition/source geometry (1 scheduled point)
Initial or scheduled ignition (-)