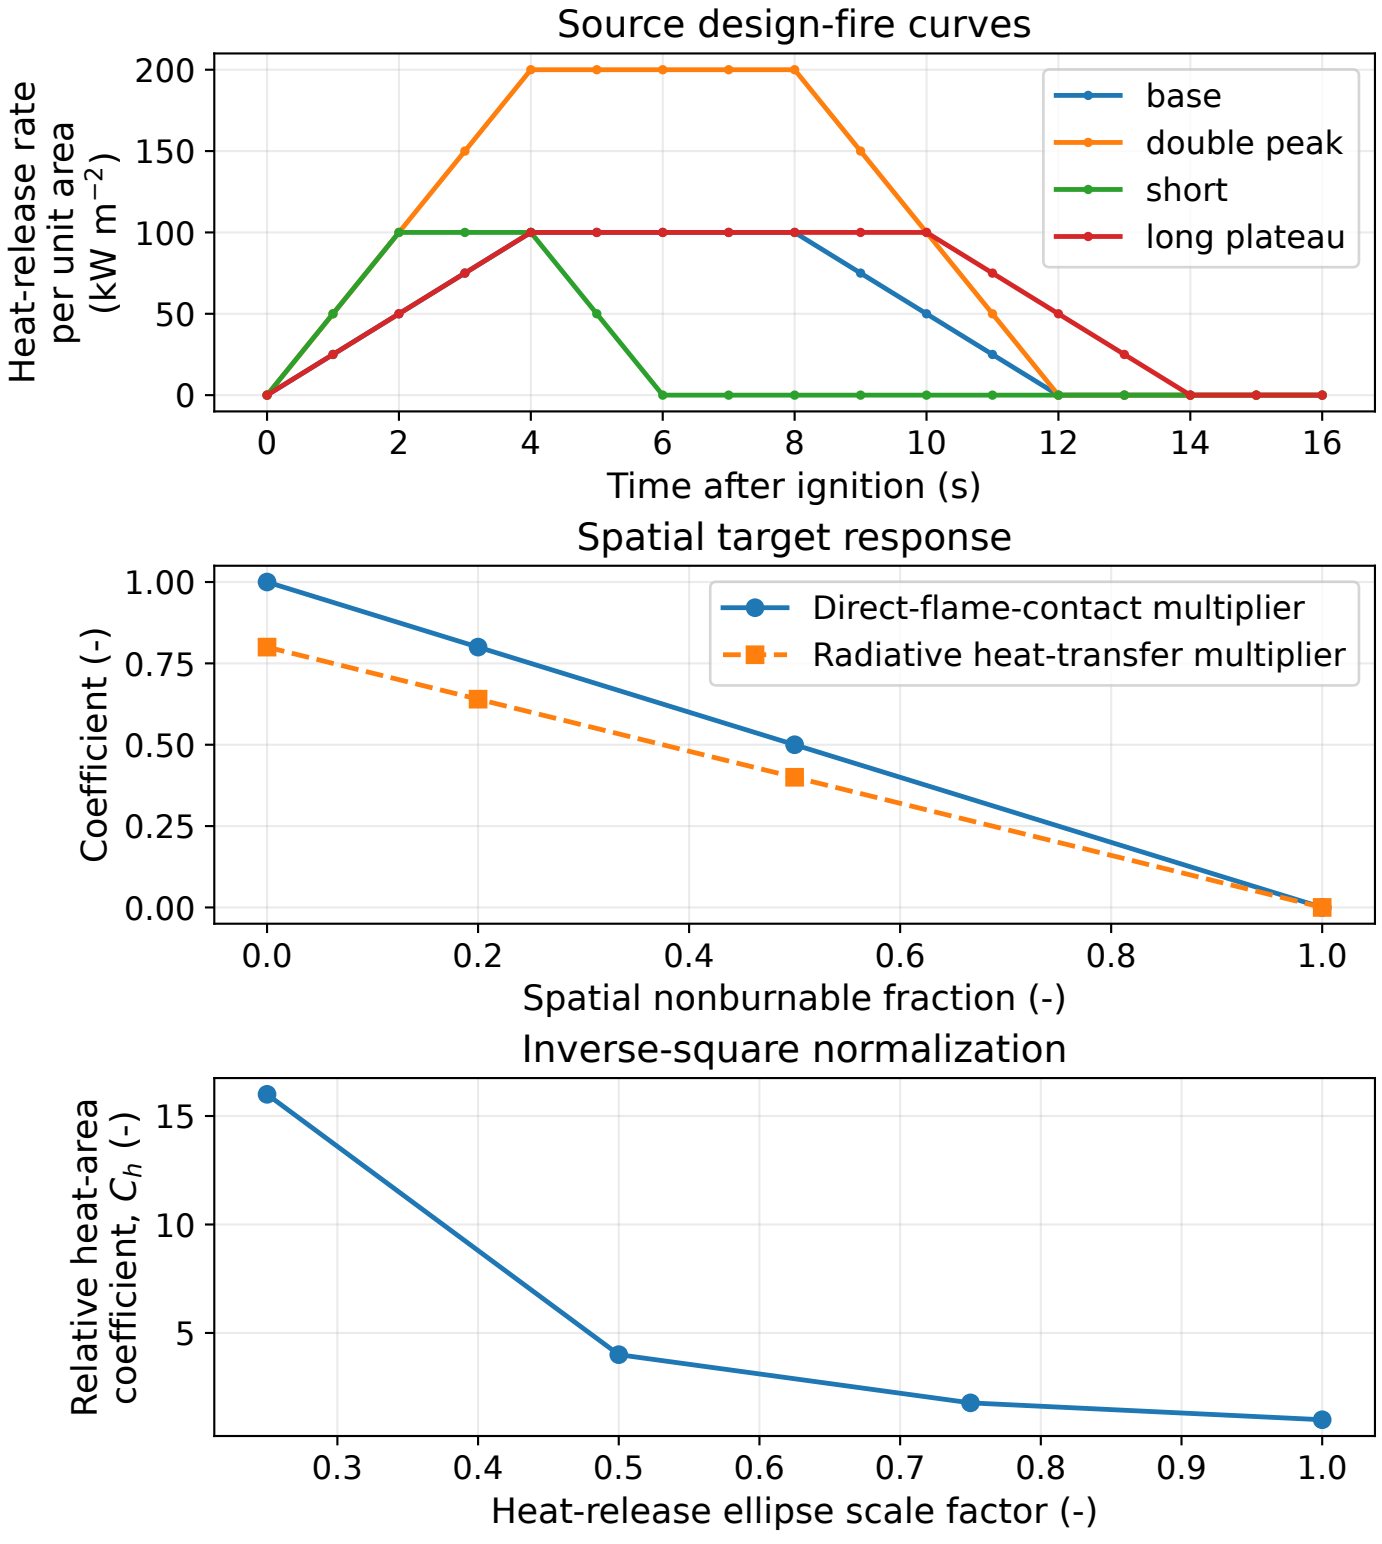
Source design-fire curves
Heat-release rate per unit area (kW m^{-2})
200
150
100
50
0
0
2
4
6
8
10
12
14
16
Time after ignition (s)
base
double peak
short
long plateau
Spatial target response
Coefficient (-)
1.00
0.75
0.50
0.25
0.00
0.0
0.2
0.4
0.6
0.8
1.0
Spatial nonburnable fraction (-)
Direct-flame-contact multiplier
Radiative heat-transfer multiplier
Inverse-square normalization
Relative heat-area coefficient, C_h (-)
15
10
5
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Heat-release ellipse scale factor (-)