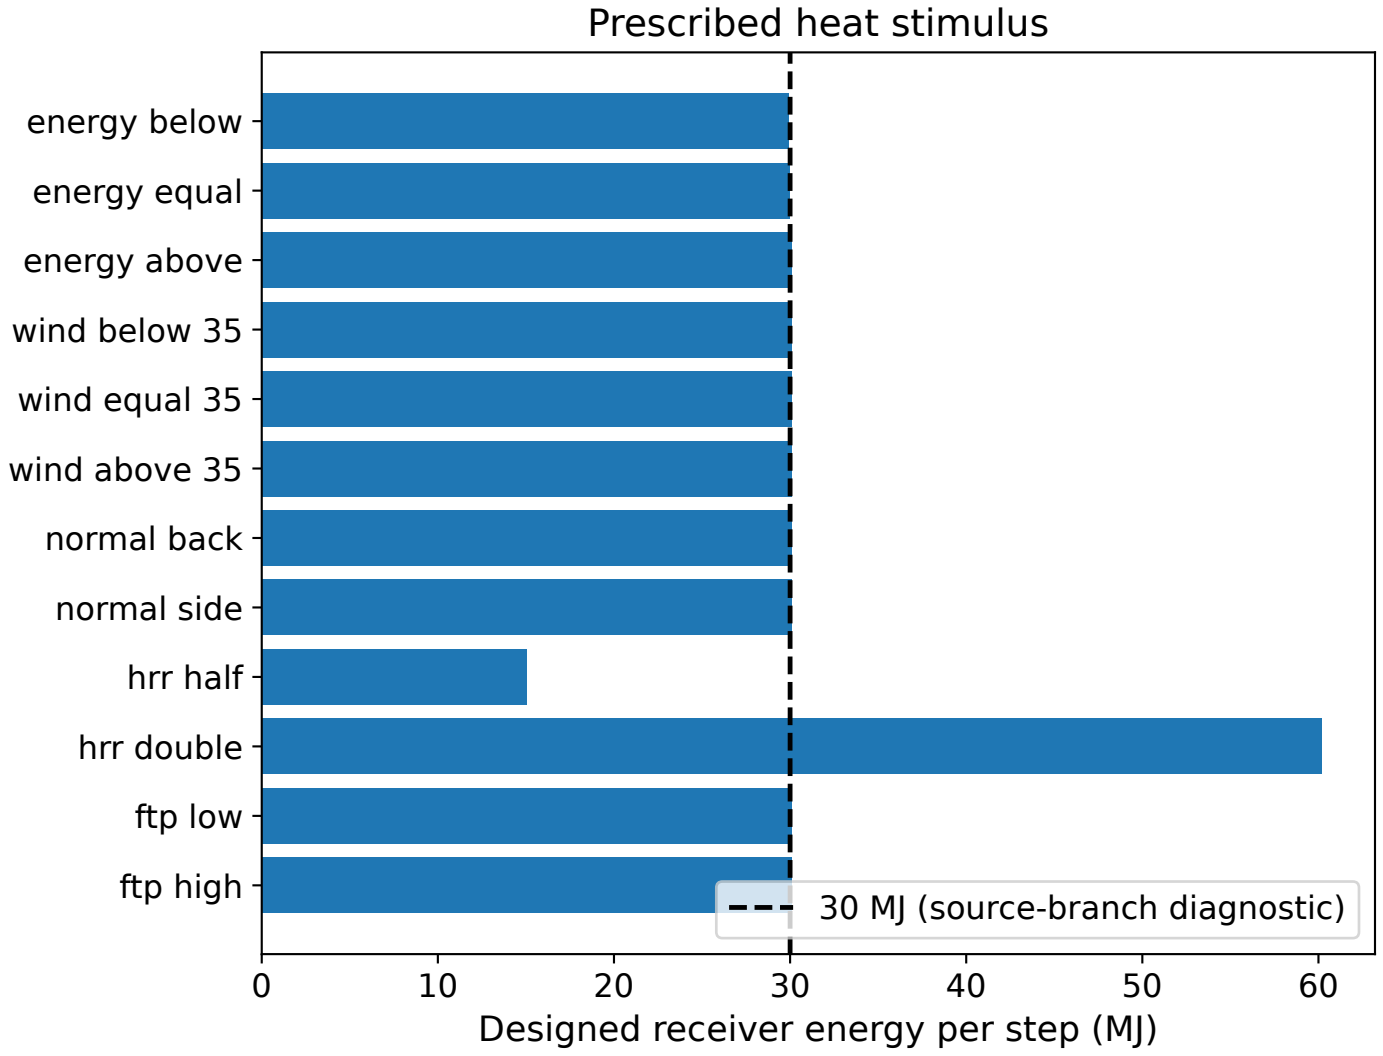
Prescribed heat stimulus
energy below
energy equal
energy above
wind below 35
wind equal 35
wind above 35
normal back
normal side
hrr half
hrr double
ftp low
ftp high
30 MJ (source-branch diagnostic)
0
10
20
30
40
50
60
Designed receiver energy per step (MJ)