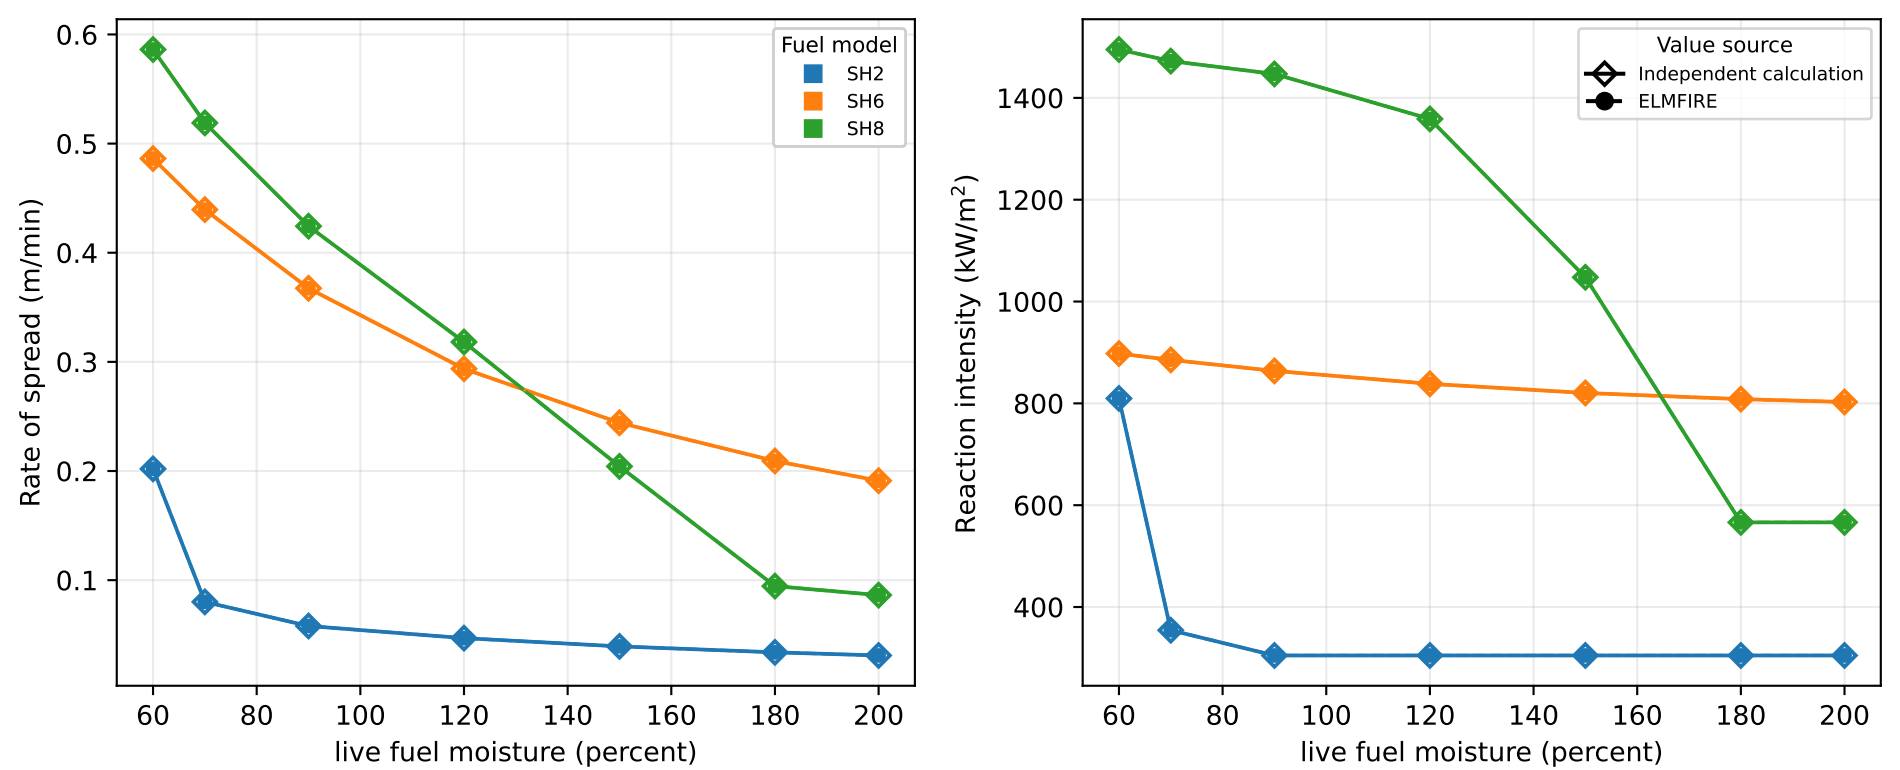
Rate of spread (m/min)
0.6
0.5
0.4
0.3
0.2
0.1
60
80
100
120
140
160
180
200
live fuel moisture (percent)
Fuel model
SH2
SH6
SH8
Reaction intensity (kW/m^2)
1400
1200
1000
800
600
400
live fuel moisture (percent)
Value source
Independent calculation
ELMFIRE