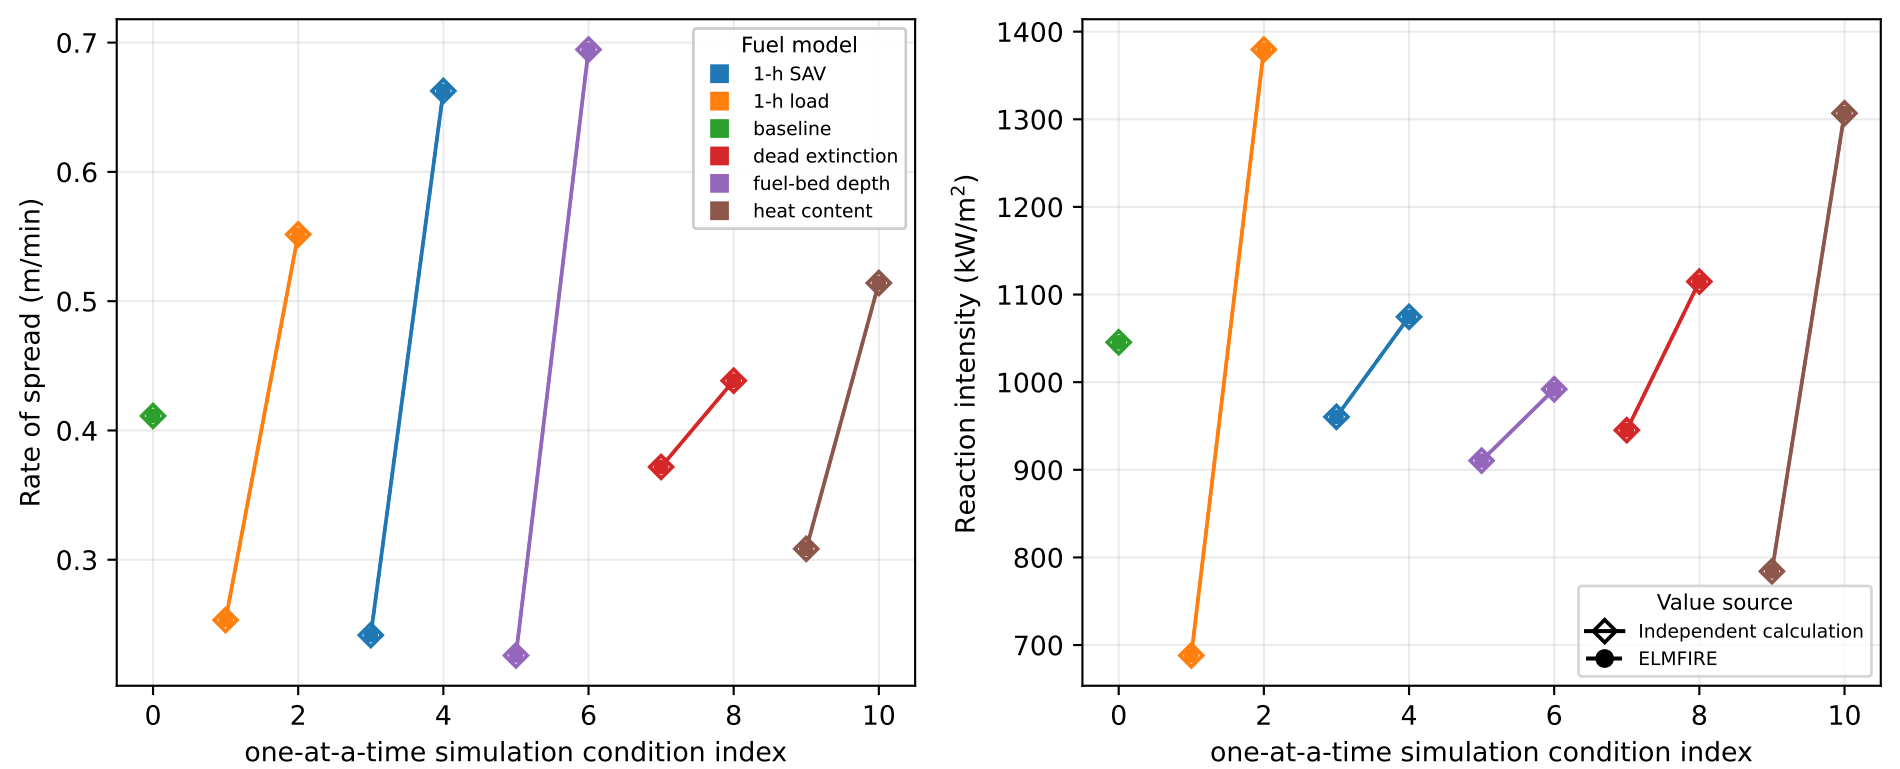
Rate of spread (m/min)
0.7
0.6
0.5
0.4
0.3
0
2
4
6
8
10
one-at-a-time simulation condition index
Fuel model
1-h SAV
1-h load
baseline
dead extinction
fuel-bed depth
heat content
Reaction intensity (kW/m$^2$)
1400
1300
1200
1100
1000
900
800
700
Value source
Independent calculation
ELMFIRE