Prüfbericht-Nr.: *Test report no.*:	**CN25BX3O 001**	**Auftrags-Nr.:** *Order no.*:	326092830	Seite 1 von 11 *Page 1 of 11*
Kunden-Referenz-Nr.: *Client reference no.*:	2097732	**Auftragsdatum:** *Order date:*	2025-01-20	
Auftraggeber: *Client*:	REPT BATTERO Energy Co.,Ltd. No .205, Binhai 6th Road, Wenzhouwan New District,Longwan District, Wenzhou, Zhejiang Province			
Prüfgegenstand: *Test item*:	Rechargeable Li-ion Battery System			
Bezeichnung / Typ-Nr.: *Identification / Type no.*:	Y104R04C12-314			
Auftrags-Inhalt: *Order content*:	Test Report			
Prüfgrundlage: *Test specification*:	ISO 3744: 2010			

Wareneingangsdatum: *Date of sample receipt*:	2025-01-20
Prüfmuster-Nr.: *Test sample no:*	Battery System 006#
Prüfzeitraum: *Testing period*:	2025-01-21 – 2025-01-22
Ort der Prüfung: *Place of testing*:	See page 5 for details
Prüflaboratorium: *Testing laboratory:*	TÜV Rheinland (Shanghai) Co., Ltd.
Prüfergebnis*: *Test result**:	See page 7 for detials



geprüft von: tested by: Anhui Wu		**genehmigt von:** *authorized by*: David Zhou	
Datum: *Date:* 2025-02-24	Anhui Wu	**Ausstellungsdatum:** *Issue date:* 2025-02-24	David Zhou
Stellung / Position:	Sachverständige(r)/Expert	**Stellung** / Position:	Sachverständige(r)/Expert

Sonstiges / *Other*: See the following pages for General product information and comment.

Zustand des Prüfgegenstandes bei Anlieferung: *Condition of the test item at delivery*: Prüfmuster vollständig und unbeschädigt *Test item complete and undamaged*

* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
** Legend:*	*P(ass) = passed a.m. test specification(s)*	*F(ail) = failed a.m. test specification(s)*	*N/A = not applicable*	*N/T = not tested*

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.
This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. *The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.* *Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.*
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature *As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature*
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. *Test clauses with remark of * are subcontracted to qualified subcontractors and descripted under the respective test clause in the report.* *Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.*
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnisen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezueglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. *The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.*

1. Description of the product

The equipment with model name Y104R04C12-314 is a Rechargeable Li-ion Battery System that is storing the electric energy by internal Li-ion battery modules. The whole system contains twelve racks and six switch gears and each switch gear controls two racks. The EUT contains auxiliary distribution system, fire suppression system and chilling system. The fan, which is the dominant source of noise and it's running at full mode. Air outles and inlets of the unit are situated along the left facade. The control system is also on, but the noise is less and negligible.

The main features of the Rechargeable Li-ion Battery System are shown as below:

Product name	Battery container (Rechargeable Li-ion Battery System)
Model	Y104R04C12-314
Voltage range	1040V-1500Vdc
Nominal voltage	1331.2Vdc
Rated charge and discharge power	1253.75KW
Maximum charge and discharge Current	1128A
Rated capacity	3768Ah
Temperature range for charging	0~55°C
Temperature range for discharging	-30~55°C
Storage Temperature	0°C~35°C
Nominal mass	Max. 44.5T
External dimensions	6058mm*2438mm*2896mm
Battery designation	IFpP72/174/207/[((1P104S)4S)12P]E/-20+50/95
Cooling type	Liquid cooling



Fig1 field test photo

2. Terms and definitions

- **SWL** indicates the sound power level in decibels (dB);
- **SPL** indicates the sound pressure level in decibels (dB);

3. List of Test and Measurement Instruments

Kind of Equipment	Measuring range	Type	S/N	Calibrated until
Microphone	Frequency: 20Hz~20kHz Sound pressure: (15.2~146) dB	AWA14423	24143	2025-09-29
			24396	2025-09-29
			24079	2025-09-29
			24104	2025-09-29
			24365	2025-09-29
			24127	2025-09-29
			24385	2025-09-29
			24290	2025-09-29
			24250	2025-09-29

Kind of Equipment	Measuring range	Type	S/N	Calibrated until
			24427	2025-09-29
Sound calibrator	Frequency: 1000Hz sound pressure: 94dB	4231	3002008	2025-08-30
Noise analyzer	Frequency: 0.2Hz~25.6kHz sound pressure: -10V~10V	SC-XS12-N	11204422	2025-03-31

4. Testing location

REPT BATTERO Energy Co., Ltd.
No .205, Binhai 6th Road, Wenzhouwan New District, Longwan District, Wenzhou, Zhejiang Province

5. Test Set-up and Operation Modes

Tab1. Test items and content

No	Test items	Test content	Measuring range	Unit
1	Airborne noise	A-weighted sound pressure level	20Hz~20kHz	dB(A)

Measure the Airborne noise of the equipment, with the measurement parameter being the 1/3 octave A-weighted sound pressure level at 1m from the surface of the equipment, with a frequency range of 20Hz to 20kHz, a reference value of sound pressure level of 2×10^{-5}Pa.


5.1 Operating mode

At the ambient temperature is 25 ± 3 °C, simulate the 0.25P operating condition of the container for testing, and turn on all external accessories, such as the electronic control device, the chiller, the air conditioner in the electrical room, the dehumidifier and so on. Among them, the fan speed of the chiller is 48% (when operating at full power, the speed is 48%), the flow rate of the water pump is 340L/min, the air conditioner is used to cool the electrical room; and the dehumidifier operates at full load for dehumidification function.

6. Testing methods

6.1 Determination of measuring surface

The measurement will be done according to ISO 3744, with the measurement parameter being the 1/3 octave A-weighted sound pressure level at 1m from the surface of the equipment, And record and save the A-weighted sound pressure level of each point. The measurement points were divided into 6 layer, totaling 48 measurement points. The distribution of the test position is as following:

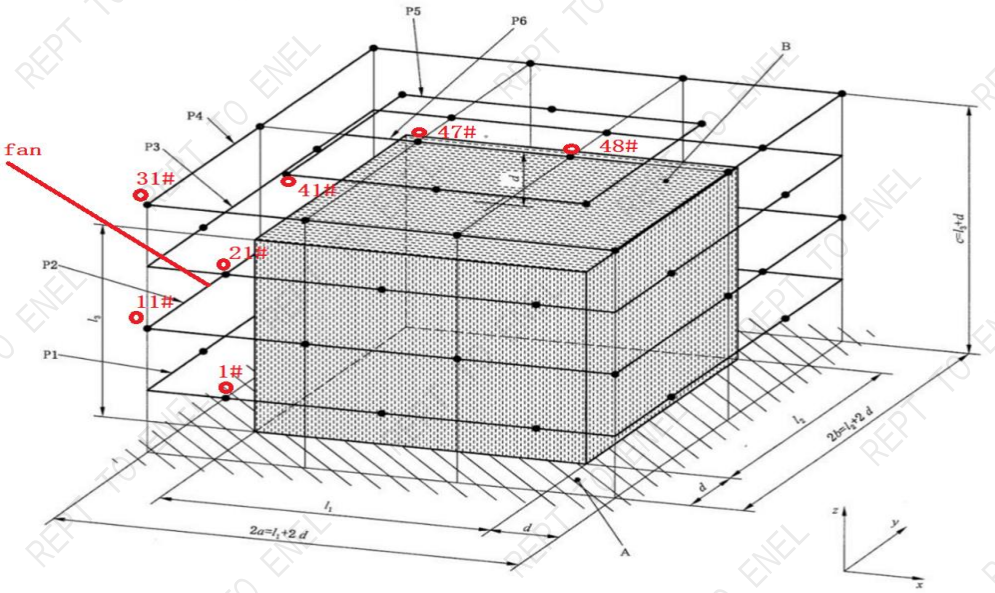

Distribution Description of Measurement Points:

1)First layer path -P1: measuring point 1to10, from measuring point 1 in counterclockwise order to measuring point 10;

2)Second layer path-P2: measuring points 11 to 20, from measuring point 11 in counterclockwise order to measuring point 20;

3)Third layer path- P3: measuring points 21 to 30, from measuring point 21 in counterclockwise order to measuring point 30;

4)Fourth layer path- P4: measuring point 31 to 40, from measuring point 31 in counterclockwise order to measuring point 40;

5)Fifth layer path-P5: measuring point 41 to 46, from measuring point 41 in counterclockwise order to measuring point 46;

6)Sixth layer path-P6: measuring point 47 to 48;

Table2. Equipment and Measurement Point Correspondence

Device ID	Path -P1	Path-P2	Path-P3	Path-P4	Path-P5	Path-P6
24143	1	11	21	31	-	-

24396	2	12	22	32	-	-
24079	3	13	23	33	-	-
24104	4	14	24	34	-	-
24365	5	15	25	35	-	-
24127	6	16	26	36	-	-
24385	7	17	27	37	-	-
24290	8	18	28	38	-	-
24250	9	19	29	39	-	-
24427	10	20	30	40	41,42,43, 44,45,46	47,48
Remark: Path -P1~P4 were fixed measurement points; Path-P5 and Path-P6 were mobile measurement points						

6.2 Sound pressure level measurement

The noise frequency measurement range : the center frequency measurement range of 1/3 octave is 20Hz ~ 20kHz, and the A-weighted sound pressure level is recorded.

Calculation of surface time-averaged sound pressure level:

$$\overline{L_p} = 10\lg\left[\frac{1}{N}\sum_{i=1}^{N} 10^{0.1L_{pi}}\right] - K1 - K2$$

where:

$\overline{L_p}$ is the surface time-averaged sound pressure level

L_{pi} is the frequency-band or A-weighted time-averaged sound pressure level measured at the ith microphone position

$K1$ is the background noise correction

$$K1 = -10\lg(1 - 10^{-0.1\Delta L_P})$$

$K2$ is the environmental correction

7. Test Results

Calculation result of surface time-averaged sound pressure level was shown in Tab3.The sound pressure level of the background noise averaged over the measured surface was shown in Tab4. The 48 measurement points 1/3 octave band noise sound pressure level test data was shown in Tab5.

Tab3. surface time-averaged sound pressure level test results								
Frequency/Hz	20	25	31.5	40	50	63	80	100
Mean value /dB(A)	-1.80	4.74	10.96	15.38	20.24	29.37	42.02	42.16
Frequency/Hz	125	160	200	250	315	400	500	630
Mean value /dB(A)	48.28	46.87	47.83	47.52	46.76	47.13	48.22	49.31
Frequency/Hz	800	1000	1250	1600	2000	2500	3150	4000

Mean value /dB(A)	49.16	48.64	47.35	46.19	44.17	41.76	39.89	37.12
Frequency/Hz	5000	6300	8000	10000	12500	16000	20000	$\overline{L_P}$
Mean value /dB(A)	34.27	32.01	35.00	23.80	20.37	24.63	11.11	59.20

remarks:

1) When the average noise pressure level when the measured sound source is turned on differs from the average background noise pressure level when the measured sound source is turned off by more than 15 dB (A), according to the ISO 3744 standard, no correction is required and K_1=0 is taken.
2) The measured sound source was located in an open and large factory building, with almost no reflected sound around, no correction is required and K_2=0 is taken.

Tab4. surface time-averaged sound pressure level (background noise) test results

Frequency/Hz	20	25	31.5	40	50	63	80	100
Mean value /dB(A)	-0.91	4.43	10.94	15.17	18.77	19.87	21.40	22.97
Frequency/Hz	125	160	200	250	315	400	500	630
Mean value /dB(A)	21.17	23.15	21.73	19.73	23.21	23.16	21.51	22.04
Frequency/Hz	800	1000	1250	1600	2000	2500	3150	4000
Mean value /dB(A)	21.60	20.37	20.20	20.40	20.58	25.86	20.69	20.17
Frequency/Hz	5000	6300	8000	10000	12500	16000	20000	$\overline{L_P}$B
Mean value /dB(A)	19.68	19.64	19.34	18.49	17.50	16.33	14.79	35.46

Tab5. 48 measurement points 1/3 octave band noise sound pressure level test data

Freq.	1	2	3	4	5	6	7	8	9	10	11	12
Hz	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)
20	-1.50	0.23	-1.98	-2.99	-2.48	-1.95	-1.85	-0.88	-0.09	-0.87	-2.49	-2.26
25	5.14	6.13	4.31	4.42	6.89	7.02	6.74	8.41	7.89	9.55	3.66	3.67
31.5	10.90	12.39	11.74	11.07	10.51	11.25	13.68	15.24	13.85	12.47	9.97	12.02
40	16.33	17.53	14.81	15.24	15.01	16.15	18.76	20.09	21.80	19.97	13.34	14.29
50	19.62	20.30	17.99	16.06	16.93	20.77	22.07	25.67	27.55	24.05	19.72	19.59
63	29.31	26.29	26.99	22.93	24.27	26.11	28.33	32.63	37.34	34.32	27.32	26.52
80	39.13	37.33	35.13	32.14	34.04	35.97	35.39	41.87	48.53	46.74	35.48	33.62
100	36.65	36.28	35.09	34.14	33.17	33.72	34.14	40.87	47.84	45.70	42.14	33.41
125	41.53	43.57	42.53	41.75	41.36	39.36	41.42	47.08	53.19	48.87	52.00	44.40
160	41.86	42.23	43.72	41.15	42.19	41.24	43.15	51.32	54.10	49.69	48.73	43.79
200	42.88	42.34	41.55	41.77	38.65	39.47	44.36	53.56	57.45	51.81	47.93	41.29
250	42.85	38.90	37.51	38.18	36.38	38.67	43.84	51.51	56.68	52.96	46.88	39.33
315	41.63	39.87	36.67	37.70	36.93	39.35	44.66	51.52	51.61	49.92	48.91	39.43
400	40.25	38.34	36.52	35.68	34.68	38.77	41.86	51.51	55.96	50.05	49.24	38.97
500	43.65	39.07	37.17	36.67	36.51	39.34	43.05	52.40	54.84	53.11	51.63	39.95
630	43.07	38.95	37.32	36.63	36.53	41.34	44.99	53.86	57.21	53.61	49.99	40.28
800	42.00	38.46	36.33	35.70	35.21	40.05	44.64	52.41	56.53	53.86	51.40	39.44
1000	40.86	37.45	35.59	34.41	34.93	40.08	43.38	50.88	55.49	53.69	50.88	38.26
1250	38.57	35.34	33.94	33.00	33.04	36.81	40.53	48.74	54.69	51.82	48.50	37.14
1600	37.41	33.80	32.29	31.08	31.06	36.36	40.53	47.36	53.40	51.57	48.59	36.02
2000	35.17	31.75	30.32	29.14	29.47	34.74	38.74	45.03	51.27	49.51	46.91	34.29
2500	33.15	29.78	27.95	27.19	27.34	32.28	37.41	42.47	48.71	46.75	44.23	32.61
3150	30.54	27.57	25.63	24.71	24.54	29.31	38.27	40.35	46.69	44.14	42.17	29.91
4000	27.11	24.17	22.40	21.42	21.00	25.35	38.18	36.98	44.27	41.27	38.68	27.37
5000	23.67	19.99	18.10	17.81	16.84	21.04	37.51	33.62	40.84	37.31	35.43	23.11

6300	20.03	16.50	15.09	16.47	14.41	17.95	39.41	29.11	37.79	34.20	31.52	19.77
8000	22.08	17.45	15.80	16.43	14.93	20.30	38.20	33.73	41.75	39.40	36.83	22.45
10000	12.58	10.33	10.09	11.12	9.90	11.21	29.84	19.41	29.19	26.21	23.91	12.12
12500	9.22	8.38	8.19	9.53	8.05	8.56	29.86	13.92	23.70	21.13	18.60	8.85
16000	9.96	7.11	6.48	7.33	6.16	7.14	23.82	18.40	29.14	27.71	24.96	10.54
20000	4.26	5.04	4.44	5.27	4.06	4.29	21.08	5.27	9.88	8.78	7.11	4.90
L_{pi}	52.99	51.11	50.12	49.28	48.77	50.76	54.95	62.51	66.66	63.44	61.09	51.67

Continued Tab5. 48 measurement points 1/3 octave band noise sound pressure level test data

Freq.	13	14	15	16	17	18	19	20	21	22	23	24
Hz	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)
20	-3.22	-3.68	-1.57	-0.51	-1.38	-0.90	-1.01	1.19	-2.88	-0.89	-2.17	-2.38
25	2.90	2.44	4.22	4.69	3.69	4.48	4.60	7.86	4.96	4.22	2.20	2.54
31.5	12.02	10.87	10.28	10.24	10.53	13.82	11.27	13.96	11.13	10.53	10.50	8.56
40	13.51	12.21	12.47	12.54	15.07	16.32	16.47	19.67	12.37	14.28	13.49	12.76
50	17.50	14.68	15.37	16.19	20.37	20.98	22.31	27.33	17.65	17.28	16.37	15.39
63	25.98	24.55	23.10	23.35	23.92	28.26	31.90	37.51	23.03	24.04	22.83	22.03
80	30.83	32.89	31.69	31.33	30.88	37.89	44.91	49.96	38.11	35.89	28.13	31.67
100	32.03	33.55	31.19	31.20	31.09	39.44	47.67	54.14	40.70	32.46	31.46	29.54
125	40.43	38.66	39.04	38.66	41.43	46.86	55.44	59.77	45.92	43.81	41.09	40.21
160	40.45	40.34	41.26	39.04	44.61	50.41	53.11	54.36	42.57	41.27	39.62	38.52
200	39.42	38.56	40.61	39.46	42.92	47.24	52.93	56.35	41.97	40.30	39.31	37.71
250	37.40	36.68	37.17	39.43	40.86	46.63	53.81	55.26	41.79	37.70	36.71	35.42
315	37.32	37.29	36.49	39.37	41.38	46.55	54.32	55.13	41.22	36.85	35.97	35.32
400	37.78	36.63	34.56	37.08	38.82	45.36	54.28	55.48	42.15	37.64	36.53	34.14
500	37.83	37.30	34.88	38.74	41.17	45.94	54.53	57.59	43.50	38.40	36.82	35.79
630	37.50	36.89	35.24	40.42	42.63	48.57	55.18	59.41	43.24	39.76	36.97	36.08
800	37.33	36.33	34.55	38.13	41.28	47.21	55.50	58.33	40.67	38.34	36.82	35.48
1000	37.31	35.38	33.81	38.01	41.38	45.31	54.88	58.47	40.53	38.23	35.81	34.87
1250	36.34	34.30	32.59	36.01	38.91	42.82	53.27	57.89	38.61	35.98	34.63	33.79
1600	33.74	32.44	31.12	35.07	37.83	43.61	52.40	55.96	36.72	34.96	33.03	32.21
2000	31.46	30.47	28.87	32.70	36.56	42.23	50.32	53.69	35.37	32.90	30.59	29.47
2500	29.68	28.55	27.00	30.29	35.69	39.49	47.97	51.95	32.67	30.77	28.64	27.88
3150	27.35	25.99	24.71	28.38	38.54	37.19	46.45	50.21	30.81	29.21	26.32	25.65
4000	24.14	23.34	21.40	24.60	39.18	33.02	43.47	47.54	27.96	26.06	23.09	22.27
5000	19.45	19.12	16.78	20.37	39.91	29.09	39.70	44.23	23.97	21.18	18.65	18.74
6300	15.92	16.47	13.90	17.00	39.76	25.13	36.70	41.41	20.64	17.62	15.12	16.35
8000	16.55	16.46	13.87	18.74	38.29	28.28	41.89	44.80	23.36	19.21	15.47	15.95
10000	10.18	11.03	9.68	11.23	31.36	16.28	28.68	33.82	13.84	11.09	10.03	11.03
12500	8.33	9.37	7.88	8.70	30.25	11.13	23.34	28.77	9.96	8.60	8.18	9.37
16000	6.86	7.32	6.05	7.56	24.06	13.92	30.65	37.30	10.55	8.22	6.57	7.33

20000	4.48	5.33	4.00	4.34	21.78	4.64	10.56	15.49	4.26	5.06	4.45	5.39
L_{pi}	49.22	48.43	48.13	49.66	53.50	57.97	65.50	68.75	53.47	50.50	48.57	47.50

Continued Tab5. 48 measurement points 1/3 octave band noise sound pressure level test data

Freq.	25	26	27	28	29	30	31	32	33	34	35	36
Hz	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)
20	-1.49	-1.69	-2.99	-2.70	-3.34	-3.11	-1.77	-2.14	-2.84	-2.33	-2.15	-1.91
25	4.39	5.03	3.86	3.86	5.28	5.84	4.21	3.33	1.77	0.21	3.03	3.04
31.5	7.44	10.64	12.59	12.62	11.36	10.58	9.33	10.18	8.85	7.97	7.79	8.20
40	13.16	14.03	14.47	16.11	16.58	14.78	14.00	13.77	11.85	10.71	12.14	11.79
50	15.31	17.64	18.25	23.67	23.77	20.94	19.02	16.13	16.83	14.62	15.21	14.69
63	20.22	21.31	21.86	32.97	35.82	30.73	27.38	23.96	21.08	21.08	19.98	20.63
80	33.77	32.86	33.44	47.23	51.60	46.69	42.08	34.39	31.76	33.28	32.72	30.39
100	30.00	30.57	35.42	42.82	50.03	47.95	40.59	37.82	33.50	32.34	30.48	31.54
125	39.02	40.01	43.61	48.33	55.50	51.50	45.32	40.50	38.22	37.87	38.22	39.52
160	39.74	42.69	43.69	50.92	54.62	50.42	44.25	39.52	37.66	37.44	36.09	41.01
200	38.12	39.85	42.47	49.23	55.83	51.49	44.32	39.25	37.61	37.97	37.25	37.77
250	35.59	38.83	44.03	48.15	56.54	51.55	45.43	39.23	36.98	35.84	37.60	37.66
315	35.65	38.74	42.44	49.90	54.94	52.26	46.13	38.14	36.75	35.04	35.74	36.57
400	34.67	38.02	41.24	49.31	54.76	51.74	45.99	38.13	36.41	35.07	35.99	36.45
500	36.13	39.53	42.42	52.13	56.03	52.33	47.24	39.67	37.76	35.97	36.61	37.61
630	37.09	41.49	45.02	53.34	57.10	52.94	47.65	40.39	38.07	36.85	36.93	39.04
800	35.90	39.67	42.10	51.99	57.98	53.89	47.68	39.77	37.43	36.10	36.56	38.54
1000	35.07	38.51	42.08	50.51	57.38	54.35	47.42	38.32	36.26	35.92	35.91	37.74
1250	33.68	37.15	40.19	48.93	56.46	51.92	45.51	36.49	34.61	33.71	34.75	35.16
1600	31.81	35.66	39.91	48.02	55.26	50.95	44.83	35.55	33.32	31.97	34.64	34.33
2000	29.48	34.25	38.36	46.29	52.90	49.51	43.54	33.32	31.11	30.24	30.43	32.54
2500	27.59	31.37	36.15	43.26	50.30	46.49	41.05	31.77	29.08	28.31	30.78	29.97
3150	25.31	28.94	37.24	41.76	48.75	44.11	37.76	29.20	26.66	25.72	27.58	27.18
4000	21.83	25.00	37.57	38.11	46.22	40.53	34.58	25.87	23.12	22.14	22.82	23.34
5000	17.47	20.63	37.40	34.24	44.05	37.13	31.41	22.09	18.82	18.13	18.21	19.35
6300	14.40	16.90	37.91	30.15	40.64	34.46	27.22	18.38	15.54	14.95	16.26	16.04
8000	14.30	19.40	36.90	35.66	44.33	38.87	32.05	20.98	15.70	15.19	15.30	17.55
10000	9.47	10.49	29.24	22.99	32.66	25.67	19.28	11.93	10.46	10.02	10.04	10.35
12500	7.77	8.40	27.85	16.45	27.37	19.97	14.90	8.92	8.46	8.21	8.35	8.33
16000	6.06	7.18	22.73	21.29	35.11	26.33	20.35	7.99	6.52	6.42	6.48	6.92
20000	3.98	4.28	21.22	6.04	13.69	6.78	5.32	4.04	4.15	4.02	4.07	4.07
L_{pi}	47.78	50.67	54.29	61.71	67.55	63.65	57.56	50.37	48.22	47.43	47.76	49.12

REPT TO ENEL

Continued Tab5. 48 measurement points 1/3 octave band noise sound pressure level test data

Freq.	37	38	39	40	41	42	43	44	45	46	47	48
Hz	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)	dB(A)
20	-1.42	-2.40	-1.64	-1.30	-1.28	-2.94	-2.89	-2.51	-2.44	-0.65	-2.91	-3.01
25	3.85	3.69	3.86	3.96	4.91	2.81	2.44	1.56	3.22	5.42	3.08	1.29
31.5	8.93	8.25	8.48	10.08	9.55	8.57	9.12	9.50	11.04	9.98	8.58	8.87
40	13.21	13.43	12.92	14.74	13.11	13.47	12.28	13.60	14.94	14.67	11.79	13.99
50	16.58	17.81	19.62	20.69	18.85	15.63	16.99	15.39	16.46	19.39	17.24	17.31
63	19.69	27.30	31.43	33.11	29.59	24.85	21.16	21.78	23.87	32.60	28.42	24.79
80	29.50	42.97	47.72	45.21	41.04	35.78	32.41	30.59	37.48	41.72	40.01	32.22
100	33.74	35.92	42.60	43.82	38.03	35.05	32.15	31.92	32.86	39.56	35.38	33.12
125	41.67	41.92	49.15	51.42	46.09	41.83	39.07	39.10	41.13	48.08	45.47	39.92
160	39.31	42.95	48.55	48.96	41.76	39.02	37.10	38.60	39.05	46.40	41.02	38.06
200	39.91	42.63	49.13	49.98	43.48	39.55	37.16	38.13	39.14	45.67	40.91	37.61
250	39.75	42.78	49.07	50.78	42.45	37.97	35.89	35.43	38.73	46.52	40.62	36.91
315	38.65	44.27	50.08	50.64	42.39	37.99	36.10	35.90	37.82	46.86	40.38	36.84
400	38.09	42.54	50.56	50.92	43.08	37.20	36.39	35.83	39.17	47.01	39.99	36.71
500	39.52	44.29	51.78	51.89	43.18	38.40	37.37	37.27	39.43	46.92	40.20	38.07
630	40.65	43.76	51.41	52.99	42.89	38.44	37.27	38.64	40.15	44.88	39.44	37.81
800	40.00	43.66	52.28	54.30	42.49	38.03	36.51	37.43	40.12	45.86	39.57	37.42
1000	39.56	43.31	52.07	53.17	40.93	36.72	35.69	36.25	37.83	44.34	38.08	36.34
1250	37.41	41.61	50.81	52.05	40.02	35.24	34.51	34.92	36.15	42.44	36.56	34.55
1600	36.70	39.51	50.05	51.03	38.64	33.54	32.93	33.49	35.61	39.69	35.13	33.20
2000	34.67	36.99	48.34	49.58	36.06	31.20	30.53	31.33	32.63	37.67	32.92	31.03
2500	31.70	35.31	45.75	47.08	33.25	29.11	28.67	28.99	30.47	34.86	30.49	28.85
3150	29.34	33.04	43.04	44.85	31.21	26.62	25.80	26.23	27.72	31.89	28.11	26.36
4000	25.32	28.95	39.32	40.93	28.08	23.14	22.34	22.64	24.03	28.27	24.66	22.60
5000	21.03	24.71	36.31	36.73	24.08	18.77	18.22	18.23	19.67	24.51	21.07	18.65
6300	17.85	21.41	32.89	33.95	22.60	15.23	14.95	14.94	16.76	20.72	17.98	15.23
8000	19.57	24.06	37.25	39.34	22.17	15.48	15.02	14.72	16.70	22.62	20.06	15.10
10000	10.86	13.04	24.34	25.99	13.41	10.09	9.96	10.19	10.70	13.04	11.74	10.00
12500	8.52	10.34	18.97	20.33	11.50	8.17	8.31	8.35	8.39	9.49	8.83	8.19
16000	7.21	9.72	26.12	26.03	10.92	6.43	6.31	6.35	6.60	10.03	8.97	6.34
20000	4.07	4.40	7.09	6.89	4.23	4.02	4.06	4.07	4.05	4.13	4.03	4.00
L_{pi}	50.62	54.35	62.04	63.13	53.98	49.59	47.83	48.24	50.26	56.98	51.87	48.49

-The end of the report-