


ONE-PIECE TOILET

Installation
Care and maintenance ?
Warranty

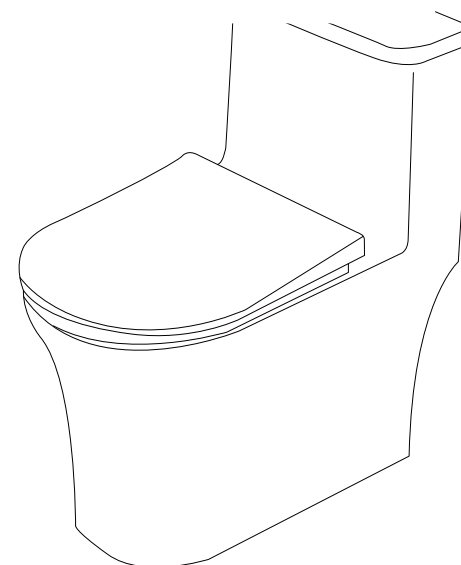

Head Office Address: Offices No. 2408-2508, Building 5A, Longguang Jiuzuan, Longhua District,

Fax: 0086-755-82875921

☎ Phone: 0086-755-82875700

Installation overview

Pre-installation checks

Read these guidelines before starting.
Installation must be carried out by a professional.

Safety measures

Get help when handling heavy objects.
Use protective equipment.

Product inspection

Check the items on receipt. Report any problem within 7 days.
Installing damaged or incorrect items invalidates the warranty.

Required tools

Spirit level, electric drill, bathroom silicone.

Specific installation instructions


Make sure of a proper fit and that the plumbing is correctly installed.
Thoroughly check all items as soon as they are delivered.
In case of defects, damage or discrepancies with the item, contact the retailer where the purchase was made immediately.




IMPORTANTE:
Do not start the installation if any problem is detected.

Preparation

First, properly prepare the accessories and tools needed for installation.

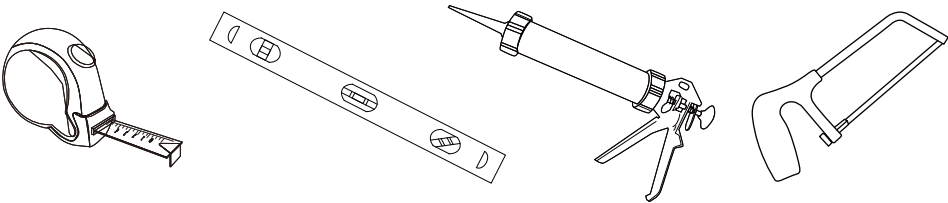

Tape measure Spirit level Silicone Saw

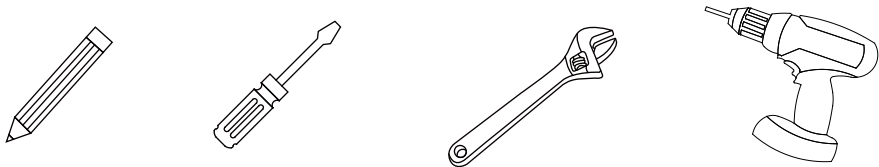

Pencil Screwdriver Pliers Drill

Product

	Flush type	Tornado-siphonic swirl
	Size	620x370x720mm
	Drain mode	S-trap
	Toilet rough-in	300mm
	Water consumption	Dual flush 4/6 L
	Seat lid	PP soft-close
	Colour	White
	Material	Vitreous china

IMPORTANT NOTICE FOR INSTALLERS:

Please hand these instructions to the consumer.


Keep them for future reference.

NOTE: Some installation parts may not be supplied.


NOTE: The toilet shown in the installation step images may differ from the model being installed.



PRECAUCIÓN: Abra el grifo y deje que el agua fluya por la tubería de fill valve.

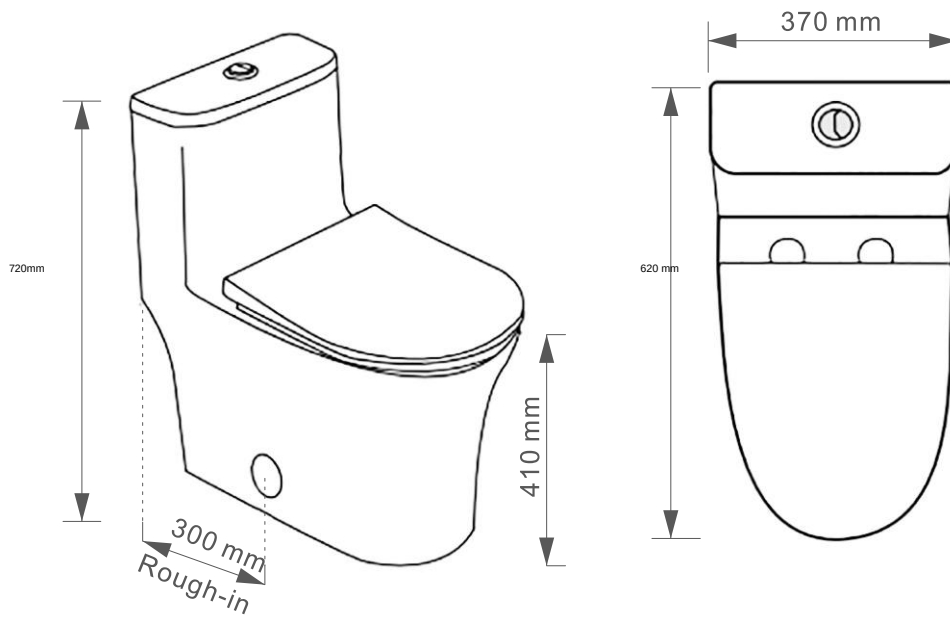

1.

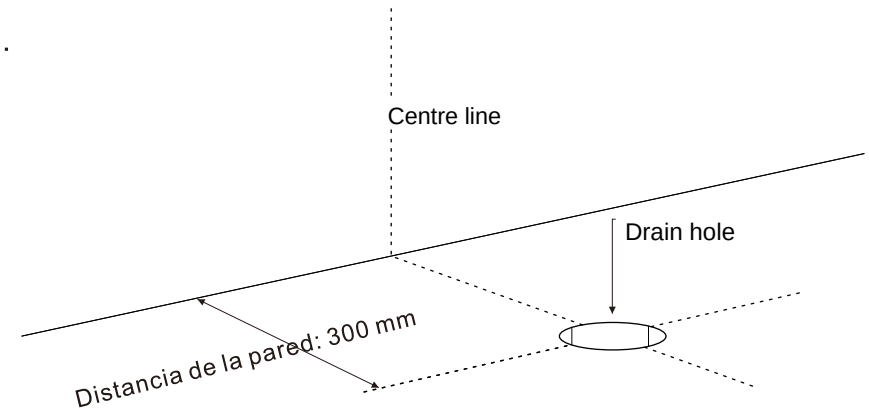


2.

Align the drain hole of the toilet with the waste pipe, then trace the outline of the toilet to mark the installation location.




3. Sealing ring ???

Install the flexible hose on the water inlet of the tank.

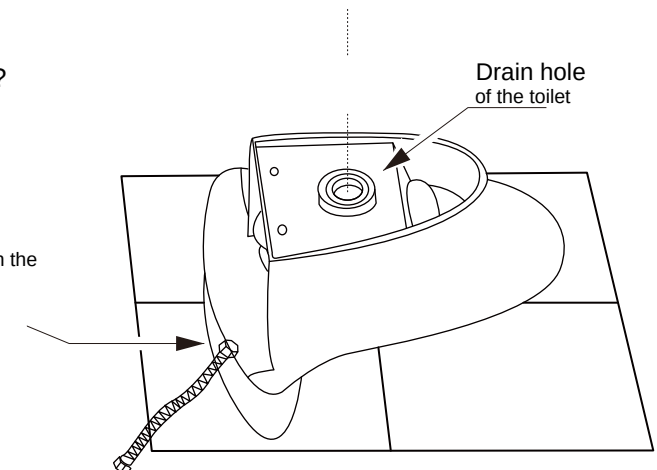


4.


10-15 mm of silicone on the toilet

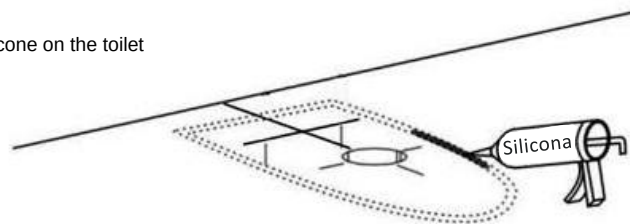


5.

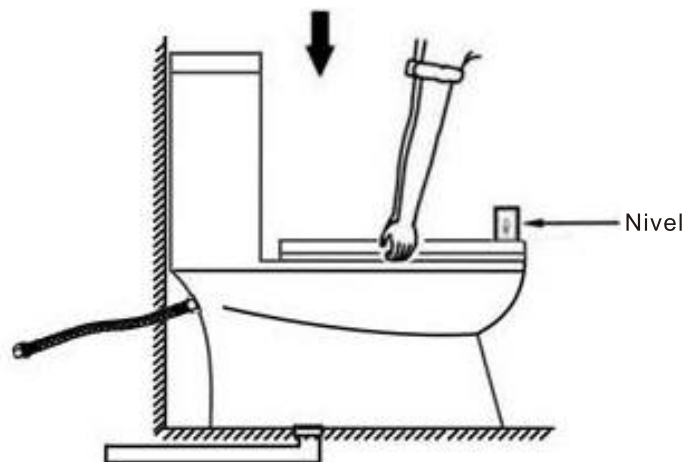

6.

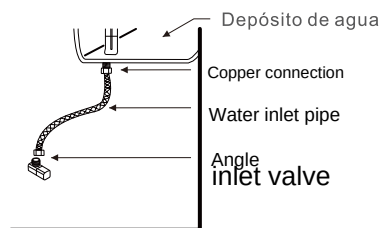

Connect the flexible hose to the angle valve

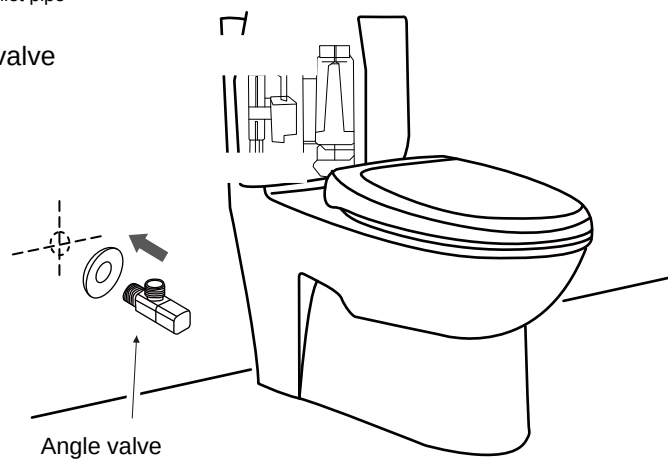


7. Open the inlet angle valve and check whether the water level has reached the correct level; then test the toilet flush and check for leaks.

If the installation is correct, lightly tighten the nut to prevent leaks.

Note:

Before the silicone dries (within 24 hours), do not touch the toilet.

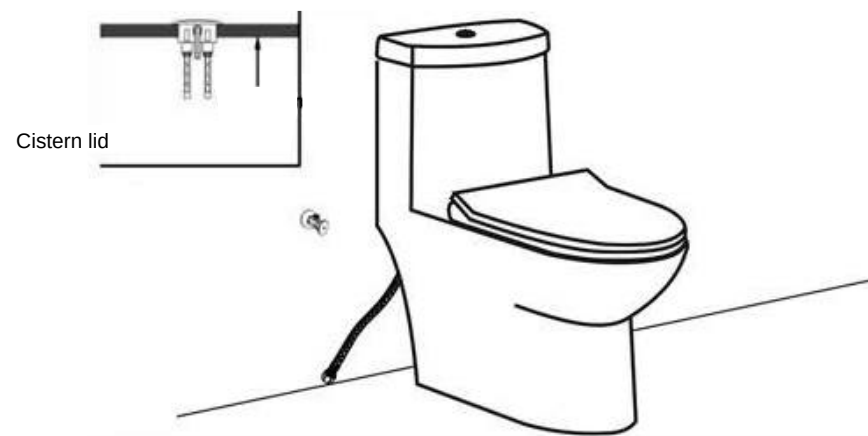

8. Install the cistern lid and the seat

