DRAFT//PRE-DECISIONAL

# At the NASA station, a drone that stays on the moving beam would be 43 dB over the allowance; drones under normal conditions are 50 dB under it

Time above the ITU-R SA.1027-6 short-term criterion (0.005% of time), relative to the allowance, dB. Worst case: one drone that follows the beam, at the limit, transmitting continuously. Normal: AirTag-measured EIRP, 1% duty cycle, local FAA-based drone density, every drone carrying UWB.

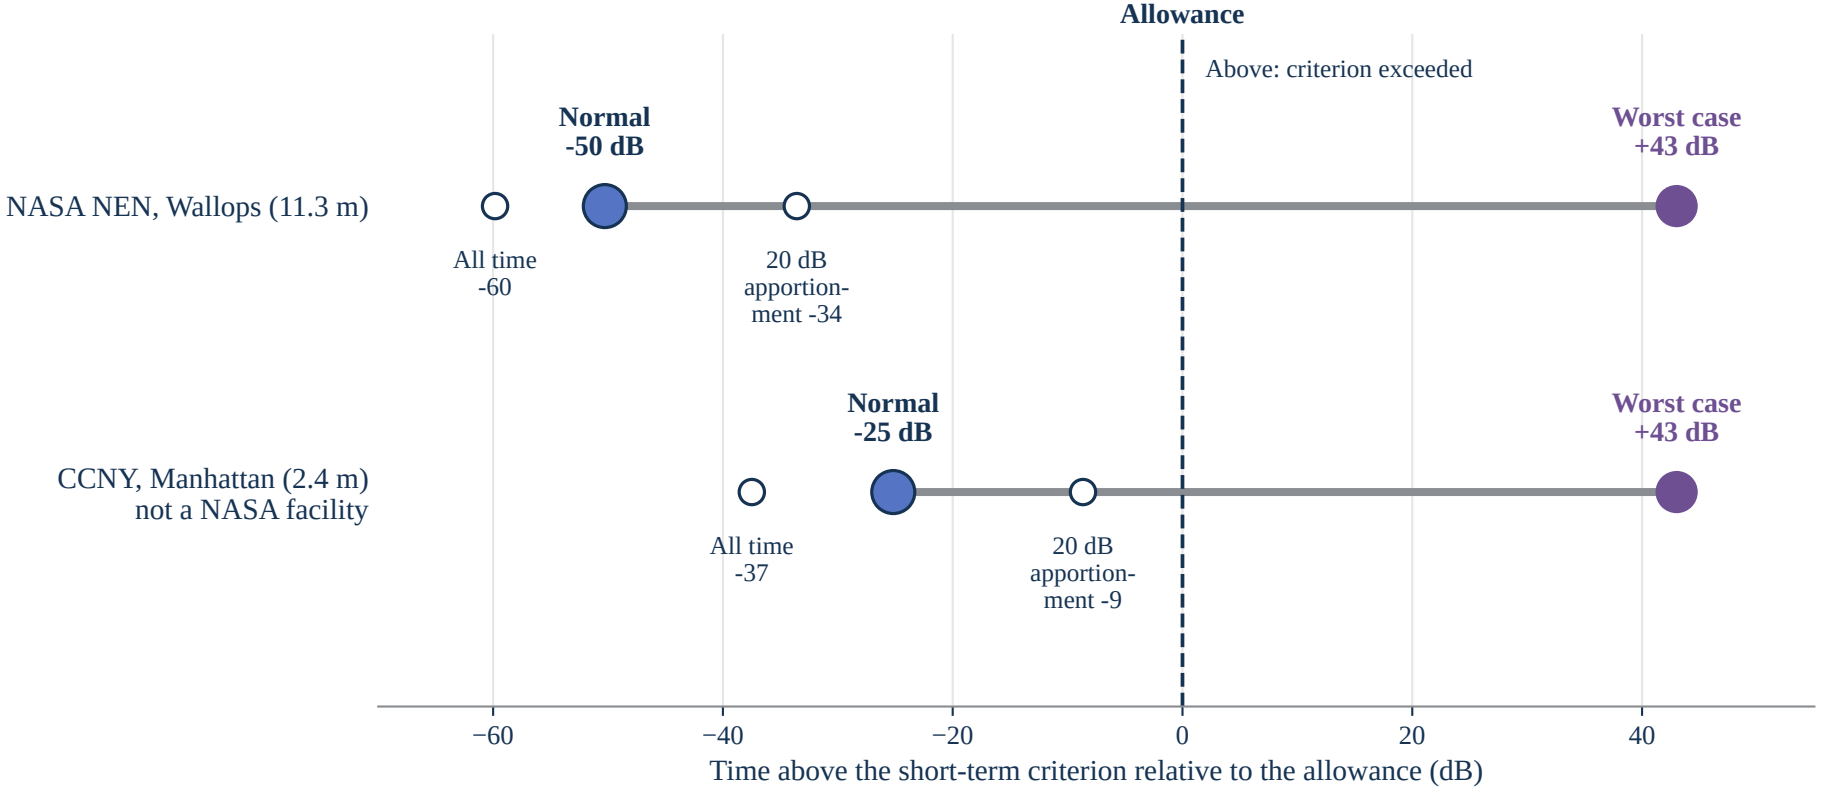


Source: nicklasorte/7GHz_UWB_NRPM, example_bridge_rev1.m, run of November 11, 2026 (docs/bridge_results/bridge_*.csv). EESS 8160 MHz, tracking-time basis unless marked.