Off the main beam, the distance collapses: one drone must be within 298 m at 1° off boresight, 40 m at 5°, and 7 m at 20°

Wallops NEN 11.3 m (ITU-R SA.509-3 pattern), EESS 8160 MHz. Slant distance inside which one drone at 400 ft exceeds the short-term criterion whenever it transmits; AirTag-measured EIRP, 3 dB polarization loss, P.528 median loss. Distance doesn't depend on duty cycle.

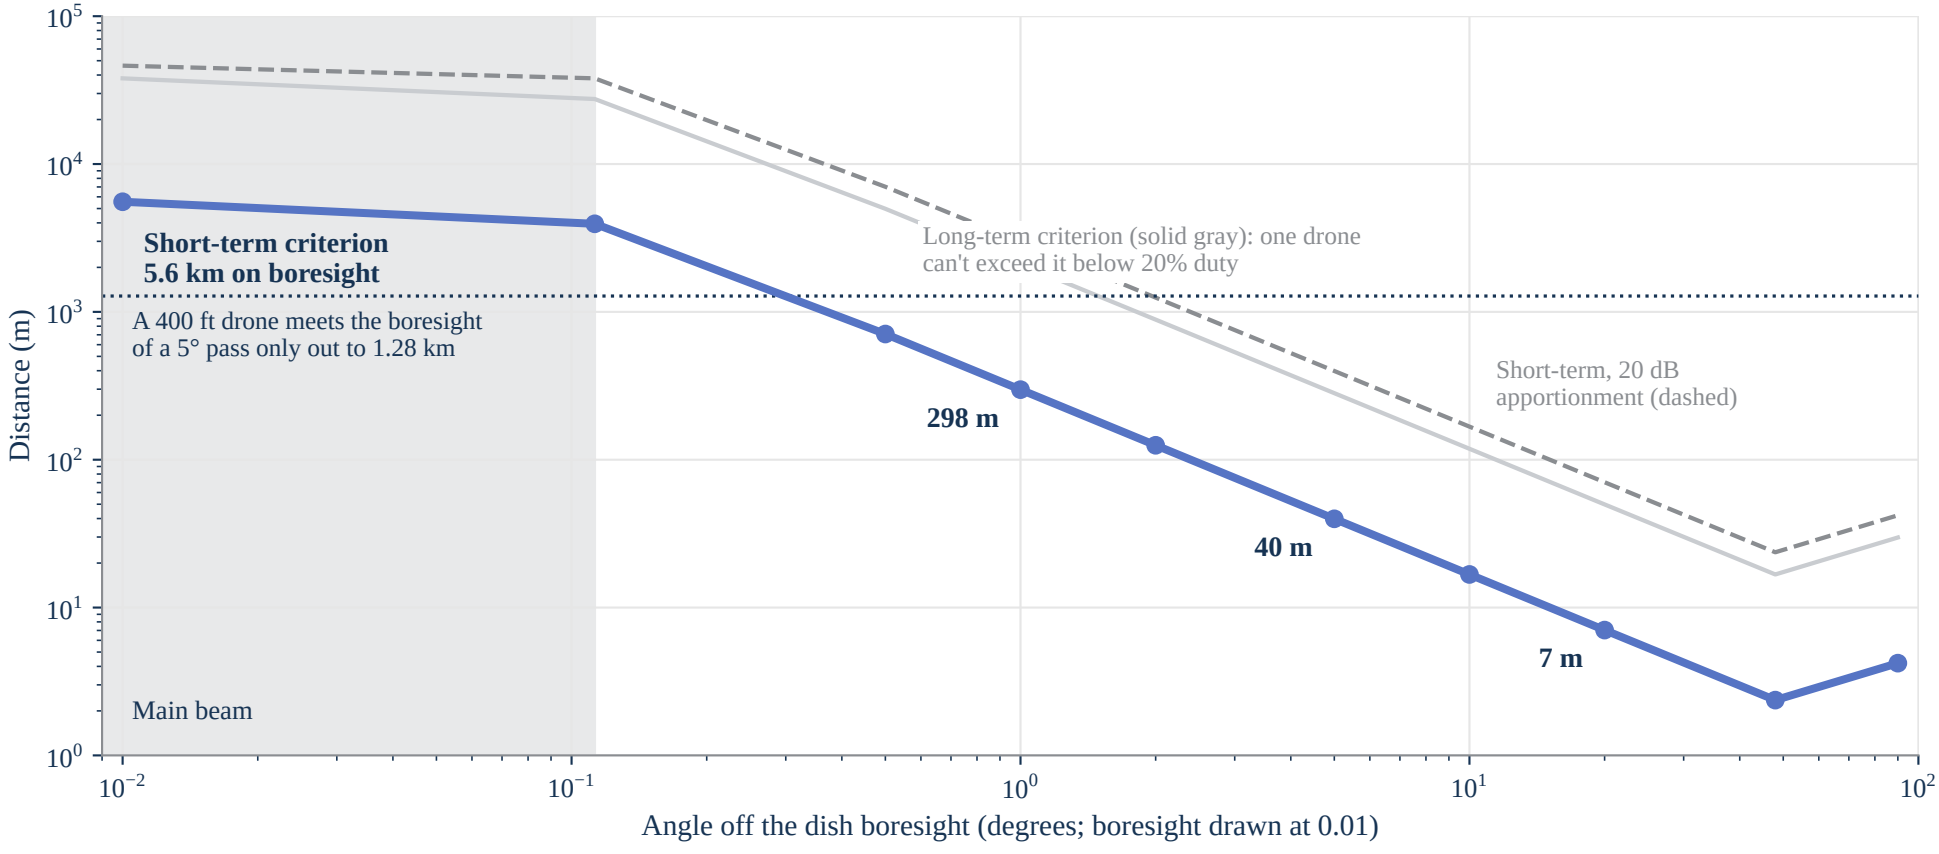

Source: nicklasorte/7GHz_UWB_NRPM, threshold_distance_rev1.m via example_bridge_rev1.m, run of November 11, 2026 (docs/bridge_results/threshold_distance_wallops.csv).