
GBS PROPERTY MAINTENANCE

WORKWEAR PLACEMENT SHEET

White T-shirt

FRONT (AS WORN: WEARER'S LEFT IS ON THE RIGHT OF THE DRAWING)

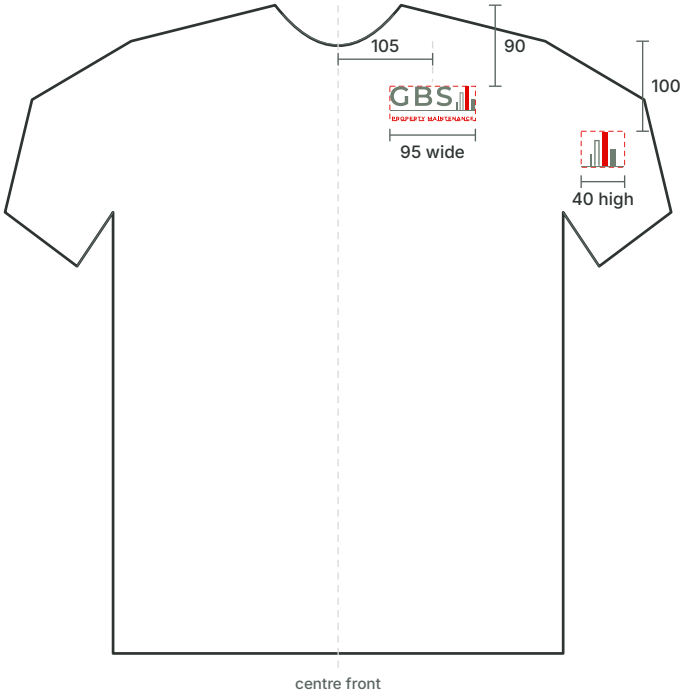

BACK



GARMENT

White or off-white garment

TECHNIQUE

Screen print (2 spot colours, sage + red) for runs of 25 or more; DTF transfer for small runs and re-orders. Soft-hand ink, no underbase on white.

PLACEMENT

Chest mark: wearer's left, centre 105 mm from centre front, top edge 90 mm below the shoulder seam at the neck point, 95 mm wide. Sleeve emblem: wearer's left sleeve, centred on the outer sleeve, top edge 100 mm below the shoulder seam, 40 mm high. Back: centred on centre back, top edge 110 mm below the back neck seam, 260 mm wide.


FILES

- GBS_HORIZON_WORKWEAR_CHEST_95MM_SAGE-RED_v1.0.png
- GBS_HORIZON_WORKWEAR_BACK_260MM_SAGE-RED_v1.0.png
- GBS_HORIZON_WORKWEAR_SLEEVE_40MM_SAGE-RED_v1.0.png


Garment white should read as clean white or off-white; avoid optic-bright blue-whites next to the sage.

Sage T-shirt

FRONT (AS WORN: WEARER'S LEFT IS ON THE RIGHT OF THE DRAWING)

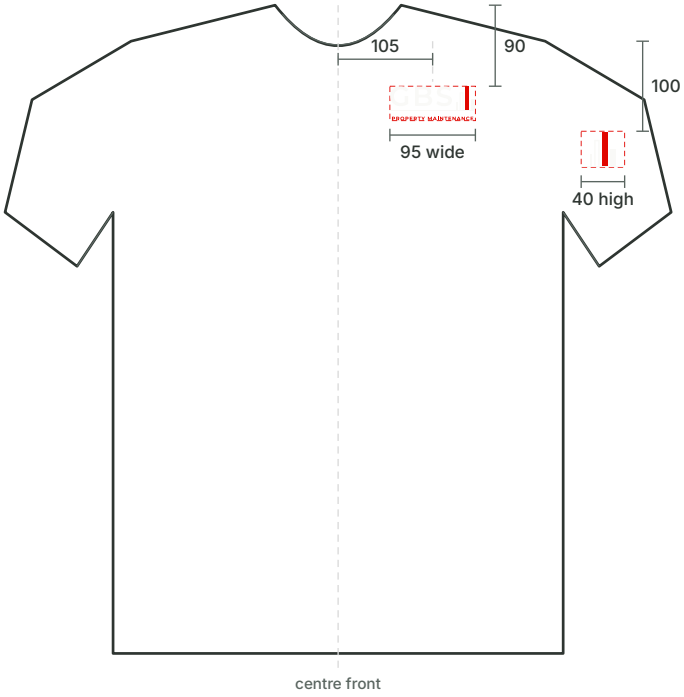

BACK

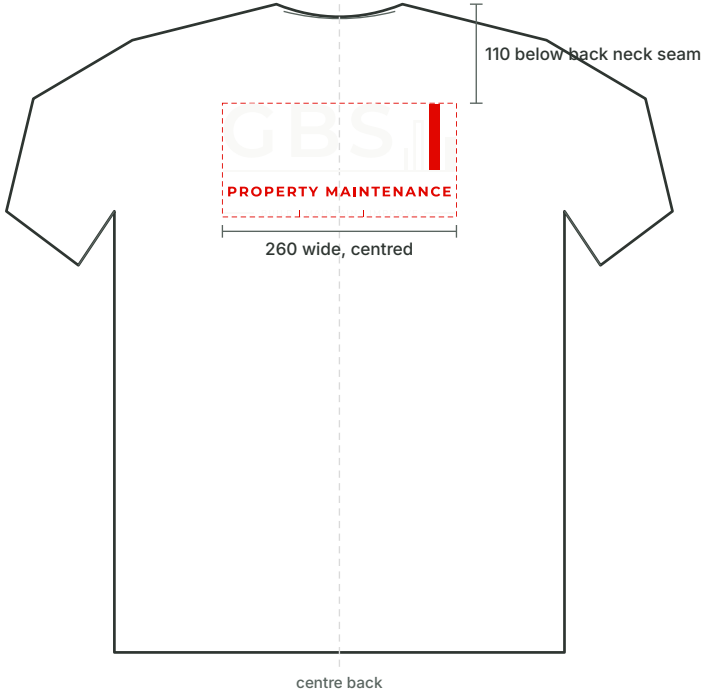

GARMENT

Sage garment (dye matched to the brand sage, supplier swatch to be approved)

TECHNIQUE

Screen print (off-white + red, with a white underbase under the red only if the supplier needs it for opacity) or DTF transfer.

PLACEMENT

Chest mark: wearer's left, centre 105 mm from centre front, top edge 90 mm below the shoulder seam at the neck point, 95 mm wide. Sleeve emblem: wearer's left sleeve, centred on the outer sleeve, top edge 100 mm below the shoulder seam, 40 mm high. Back: centred on centre back, top edge 110 mm below the back neck seam, 260 mm wide.


FILES

- GBS_HORIZON_WORKWEAR_CHEST_95MM_OFFWHITE-RED_v1.0.png
- GBS_HORIZON_WORKWEAR_BACK_260MM_OFFWHITE-RED_v1.0.png
- GBS_HORIZON_WORKWEAR_SLEEVE_40MM_OFFWHITE-RED_v1.0.png

The reversed lockup is the only approved use of red on sage. Do not add a keyline or drop shadow.

White polo

FRONT (AS WORN: WEARER'S LEFT IS ON THE RIGHT OF THE DRAWING)

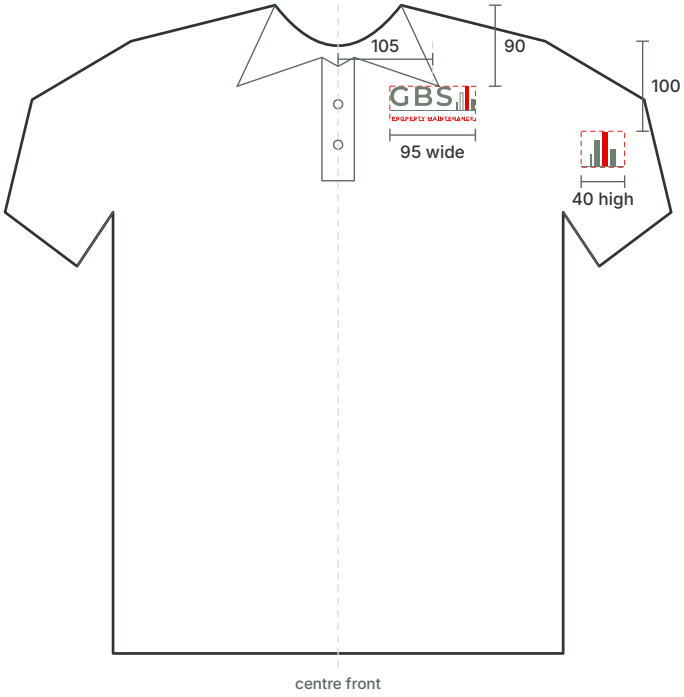

BACK



GARMENT

White garment

TECHNIQUE

Embroidery. Chest: no-strap lockup 95 mm wide. Sleeve: simplified icon 40 mm high. Back (optional, only if ordered): no-strap lockup 230 mm wide. Stitch sample (sew-out on the actual garment) required before production.

PLACEMENT

Chest mark: wearer's left, centre 105 mm from centre front, top edge 90 mm below the shoulder seam at the neck point, 95 mm wide, clear of the placket. Sleeve emblem: wearer's left sleeve, centred, top edge 100 mm below the shoulder seam, 40 mm high (simplified icon). Back (optional): centred, top edge 115 mm below the back neck seam, 230 mm wide no-strap lockup.


FILES

- 01_LOGO_MASTER/svg/GBS_HORIZON_LOGO_PRIMARY-NOSTRAP_SAGE-RED_v1.0.svg (digitise from vector)
- 01_LOGO_MASTER/svg/GBS_HORIZON_ICON_SIMPLIFIED_SAGE-RED_v1.0.svg
- See page 7, embroidery brief


Descriptor cap height at 95 mm is 3.9 mm: below the 5 mm letter test. See the embroidery brief for the sew-out decision and wordmark fallback.

Sage polo

FRONT (AS WORN: WEARER'S LEFT IS ON THE RIGHT OF THE DRAWING)

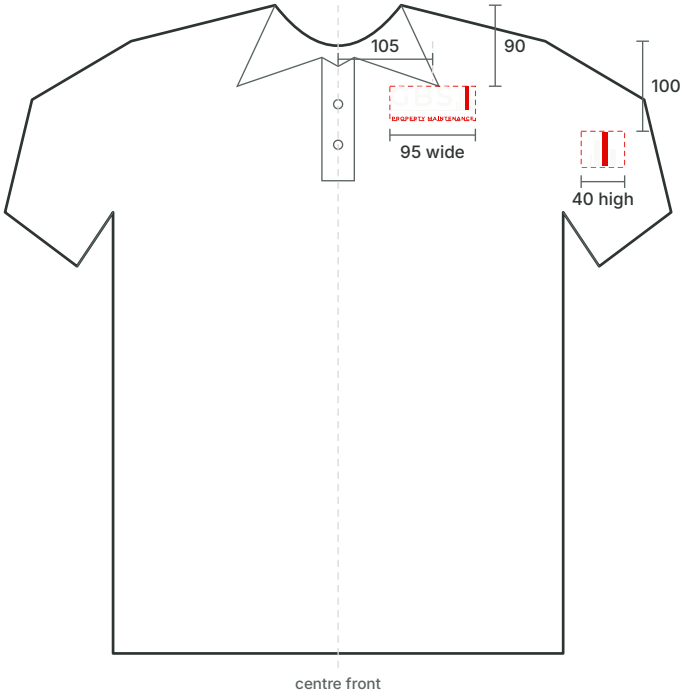

BACK

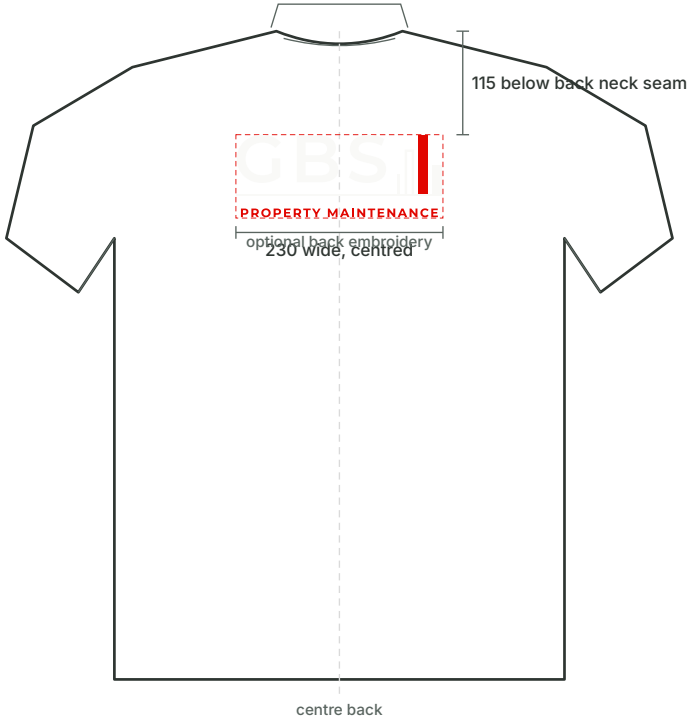

GARMENT

Sage garment (dye matched to the brand sage)

TECHNIQUE

Embroidery, as the white polo. Off-white and red threads on sage. Stitch sample required.

PLACEMENT

Chest mark: wearer's left, centre 105 mm from centre front, top edge 90 mm below the shoulder seam at the neck point, 95 mm wide, clear of the placket. Sleeve emblem: wearer's left sleeve, centred, top edge 100 mm below the shoulder seam, 40 mm high (simplified icon). Back (optional): centred, top edge 115 mm below the back neck seam, 230 mm wide no-strap lockup.


FILES

- 01_LOGO_MASTER/svg/GBS_HORIZON_LOGO_REVERSED-NOSTRAP_OFFWHITE-RED_v1.0.svg (digitise from vector)
- 01_LOGO_MASTER/svg/GBS_HORIZON_ICON_SIMPLIFIED_OFFWHITE-RED_v1.0.svg
- See page 7, embroidery brief


Sew the second (hollow) bar of the icon as a solid bar, as in the simplified icon: the 1 mm outline will not sew at this size.

Softshell jacket

FRONT (AS WORN: WEARER'S LEFT IS ON THE RIGHT OF THE DRAWING)

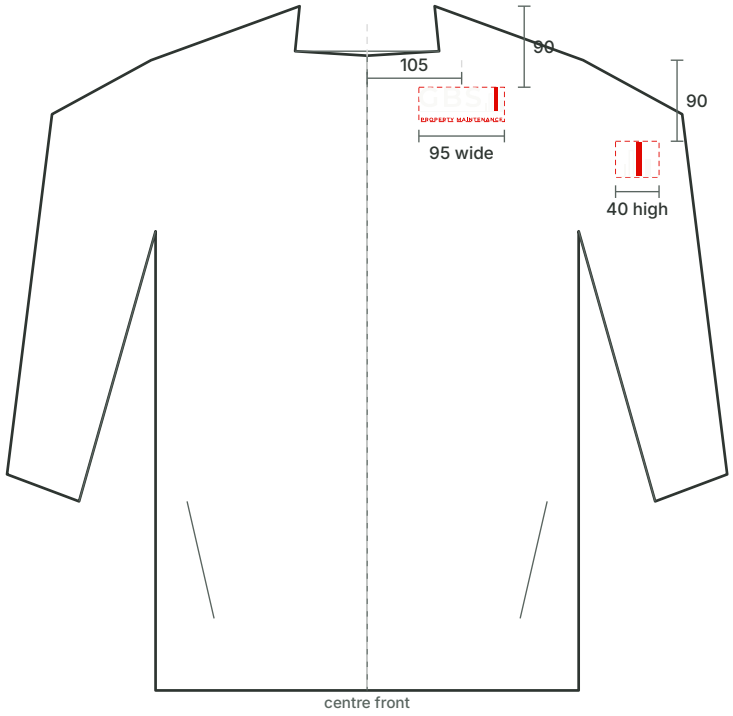

BACK

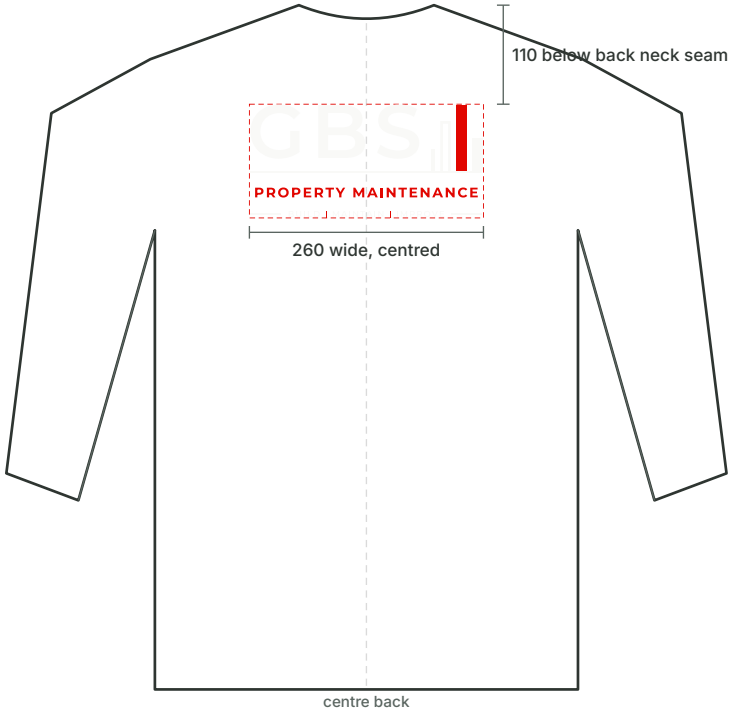

GARMENT

Sage garment (reversed artwork). If a white or off-white shell is ever ordered, use the primary files from the T-shirt page.

TECHNIQUE

Heat transfer (DTF or cut flex) applied at the temperature and dwell the shell membrane allows: supplier to confirm. Keep transfers clear of seams, zips and pockets.

PLACEMENT

Chest mark: wearer's left, centre 105 mm from centre front, top edge 90 mm below the shoulder seam at the neck point, 95 mm wide. Sleeve emblem: wearer's left sleeve, centred on the outer sleeve, top edge 90 mm below the shoulder seam, 40 mm high. Back: centred on centre back, top edge 110 mm below the back neck seam, 260 mm wide.


FILES

- GBS_HORIZON_WORKWEAR_CHEST_95MM_OFFWHITE-RED_v1.0.png
- GBS_HORIZON_WORKWEAR_BACK_260MM_OFFWHITE-RED_v1.0.png
- GBS_HORIZON_WORKWEAR_SLEEVE_40MM_OFFWHITE-RED_v1.0.png

Chest mark sits on the wearer's left, clear of the zip by at least 40 mm. If the jacket has a left chest pocket, move the mark 20 mm above the pocket zip or agree an alternative position.


Hi-vis vest (yellow, EN ISO 20471)

FRONT (AS WORN: WEARER'S LEFT IS ON THE RIGHT OF THE DRAWING)

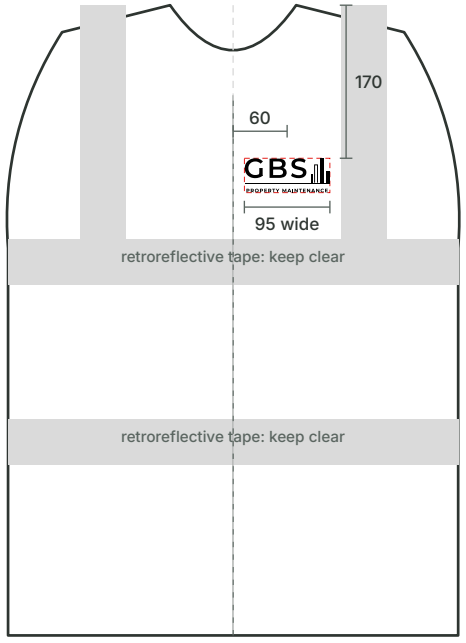

centre front

BACK

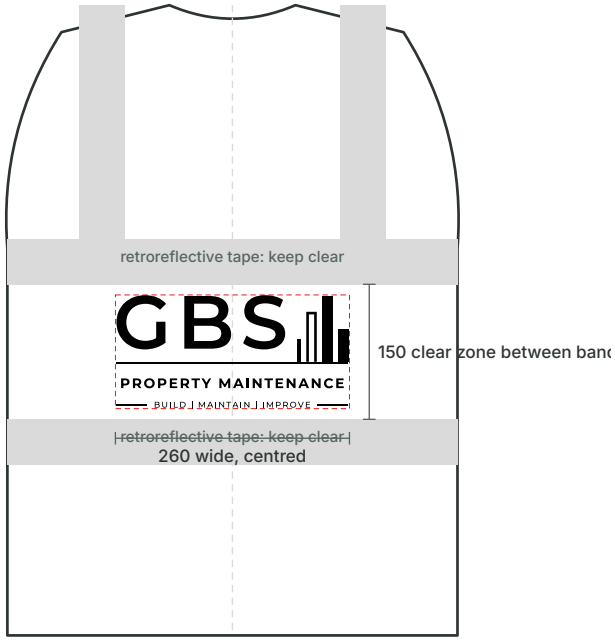

centre back

GARMENT

Fluorescent yellow garment, mono black artwork

TECHNIQUE

Screen print or transfer in black. Position to be agreed with the manufacturer so that no print touches the retroreflective tape and the certified fluorescent area is kept. Supplier to confirm the garment stays within its EN ISO 20471 class after printing.

PLACEMENT

Chest mark: wearer's left, centred between the front opening and the shoulder band (60 mm from centre front on this drawing), top edge 170 mm below the shoulder seam at the neck point, 95 mm wide. Back: centred on centre back, centred in the clear zone between the two horizontal bands (150 mm deep on this drawing), 260 mm wide. Final positions to be agreed with the manufacturer.

FILES

- GBS_HORIZON_WORKWEAR_HIVIS-BACK_260MM_BLACK_v1.0.png (zones 150 mm or deeper)
- GBS_HORIZON_WORKWEAR_HIVIS-BACK-NOSTRAP_260MM_BLACK_v1.0.png (shallower zones)
- GBS_HORIZON_WORKWEAR_HIVIS-CHEST_95MM_BLACK_v1.0.png

Back print centred between the two horizontal bands; if the clear zone between bands is under 150 mm deep, use the no-strap file (105 mm deep) or reduce to 230 mm wide. Chest mark between the shoulder band and the front opening, above the upper band; reduce to 85 mm if the zone is narrower than 110 mm.

Embroidery brief

SCOPE

Polo shirts (white and sage): left chest lockup and left sleeve emblem; optional back lockup only when ordered. Softshell jackets are heat transfer by default; embroider only if agreed in writing, using the same files.

ARTWORK SUPPLIED (VECTOR, OUTLINED, NO LIVE FONTS)

- 01_LOGO_MASTER/svg/GBS_HORIZON_LOGO_PRIMARY-NOSTRAP_SAGE-RED_v1.0.svg (white polo chest, 95 mm wide; optional back 230 mm)
- 01_LOGO_MASTER/svg/GBS_HORIZON_LOGO_REVERSED-NOSTRAP_OFFWHITE-RED_v1.0.svg (sage polo chest, 95 mm wide; optional back 230 mm)
- 01_LOGO_MASTER/svg/GBS_HORIZON_ICON_SIMPLIFIED_SAGE-RED_v1.0.svg and _OFFWHITE-RED (sleeve emblem, 40 mm high)
- 04_WORKWEAR/GBS_HORIZON_WORKWEAR_CHEST_95MM_*.png and SLEEVE_40MM_*.png (300 dpi size references only; digitise from the SVG)

Digitise from the vector files without redrawing. Keep the proportions, the clear space (one GBS cap height on every side) and the colour split exactly as supplied. In the lockup, sew the second (hollow) bar of the icon as a solid bar, matching the simplified icon: its 1 mm outline will not sew at chest size.

SIZES AND LETTER HEIGHTS

Mark	Width	Height	GBS cap	Descriptor cap
Chest lockup	95 mm	38 mm	21.4 mm	3.9 mm
Chest lockup (maximum)	105 mm	42 mm	23.6 mm	4.3 mm
Sleeve emblem (simplified icon)	48 mm	40 mm	no lettering	
Back lockup (optional)	230 mm	93 mm	51.8 mm	9.5 mm

THREAD COLOUR TARGETS

Colour	Target (RGB / hex)	Use
Sage	110 / 127 / 114 #6E7F72	GBS letters, bars, rule, descriptor on reversed marks is off-white
Red	225 / 6 / 0 #E10600	Third bar and descriptor (primary); third bar only on reversed marks where supplied
Off-white	249 / 249 / 247 #F9F9F7	Letters, bars and rule on sage garments

Propose the two nearest 40 wt polyester shades for each colour and submit thread cards. Final shades are approved against the physical samples held by GBS, not against screen values. No metallic or high-sheen threads.

MINIMUM LETTER HEIGHT TEST

Before production, sew out the descriptor PROPERTY MAINTENANCE at 5 mm and 6 mm cap height and at the actual chest size (3.9 mm at 95 mm wide; 4.3 mm at 105 mm) on the production fabric with the proposed stabiliser. If the 3.9 mm descriptor does not resolve cleanly, GBS will approve one of: (a) chest mark at 105 mm wide; (b) the wordmark without descriptor (01_LOGO_MASTER/svg/GBS_HORIZON_LOGO_WORDMARK_*) at 95 mm for embroidered chest marks. The descriptor must not be re-set in a larger size or a different font.

SIGN-OFF

Supply a sew-out of every mark on the actual garment colour for approval by the GBS Director before the production run (asset W02 in the production register). Keep the stitch files and report stitch counts with the quote.