

nereus_Pi_shield_ADIN2111

Variant: Standard

P/N: PCB-000001-AA

Index


Schematic Document	SheetNumber
BM_Mote_1_Cover.SchDoc	1
BM_Mote_1_Master.SchDoc	2
BM_Mote_1_ADIN2111.SchDoc	3
BM_Mote_1_Load.SchDoc	4
BM_Mote_1_PoDL.SchDoc	5
BM_Mote_1_PowerMon.SchDoc	6
BM_Mote_1_Power.SchDoc	7
BM_Mote_1_Processor.SchDoc	8
BM_Mote_1_USB.SchDoc	9

I2c Address Table


Device	I2C Address
Power Monitor	0x41

DIMENSIONS: 49 mm x 37 mm


Top-Level Schematic
File: BM_Mote_1_Master.kicad_sch

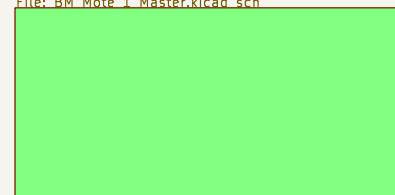

TOP VIEW

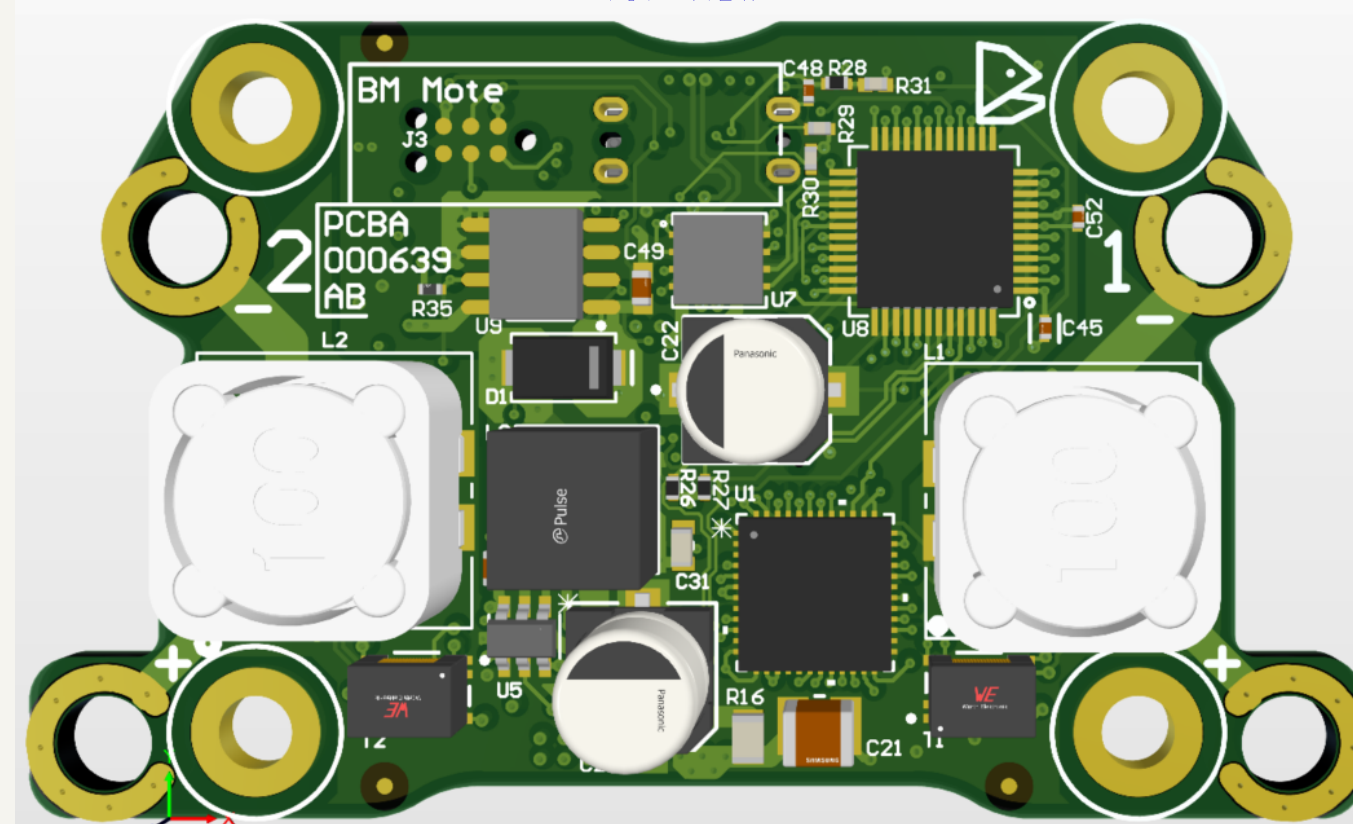

BOTTOM VIEW

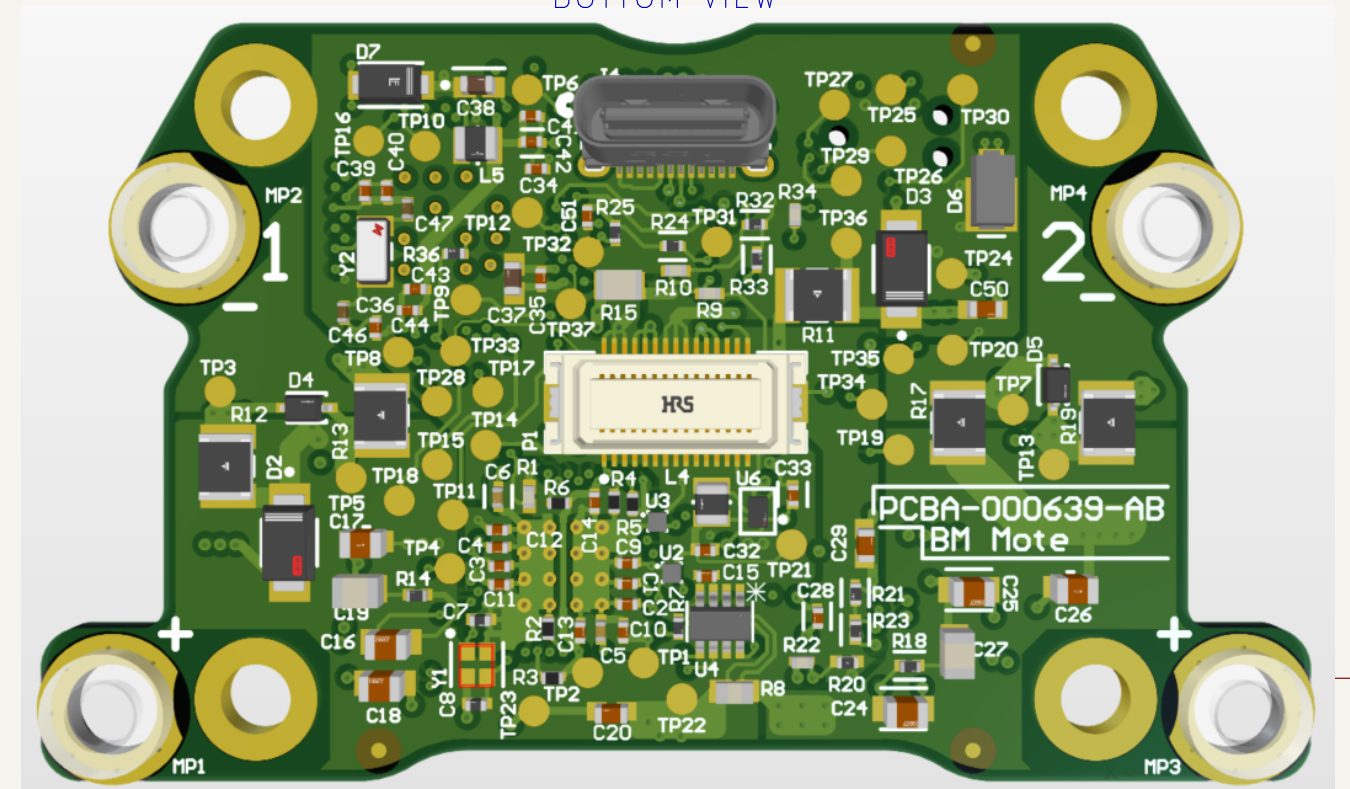

The Bristlemouth Mote Board is licensed under a Creative Commons Attribution-NoDerivatives 4.0 International License. The Bristlemouth trademarks and the Bristlemouth logo are registered and unregistered trademarks to Sofar Ocean Technologies, Inc., and are not included under the Creative Commons license.
<https://creativecommons.org/licenses/by-nd/4.0/legalcode>

Sheet: /
File: nereus_Pi_shield_ADIN2111.kicad_sch

Title: Cover Page

Size: A3
KiCad E

Date:


Cover Page

Rev: AA

Id: 1/7

PCB-000001-AA




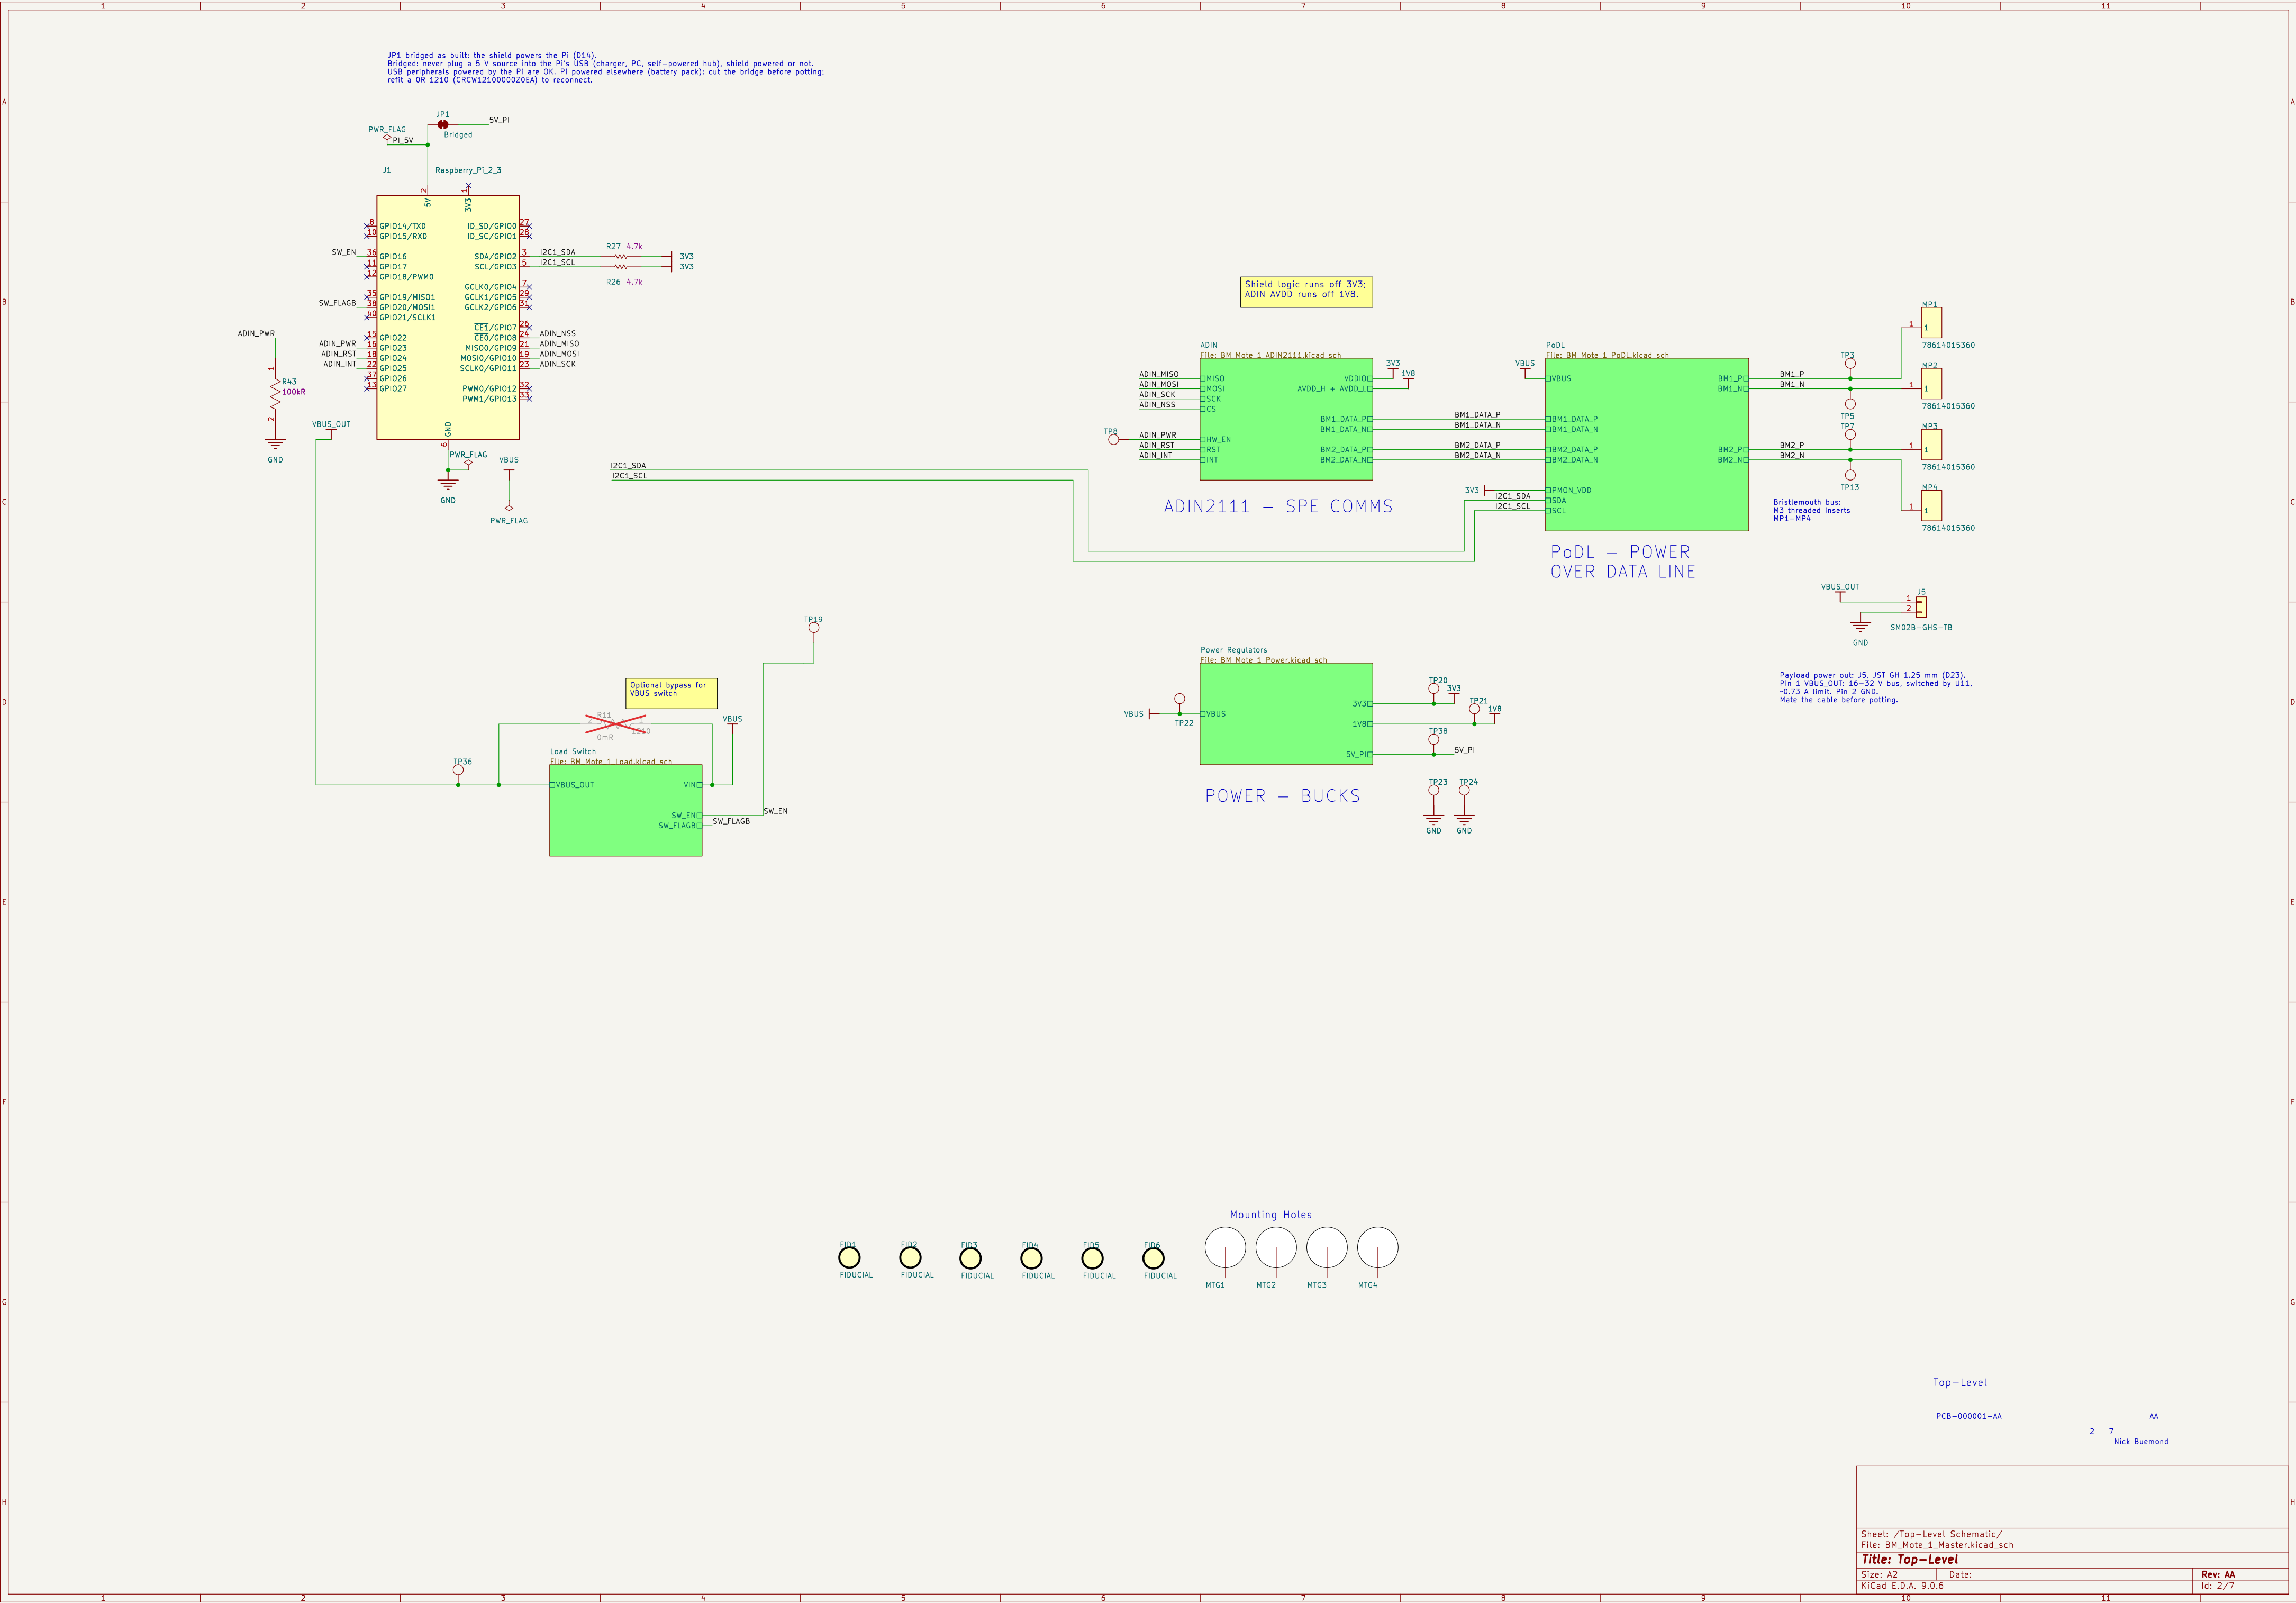

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---




F	1	2	3	4	5	6	7	8	F
---	---	---	---	---	---	---	---	---	---

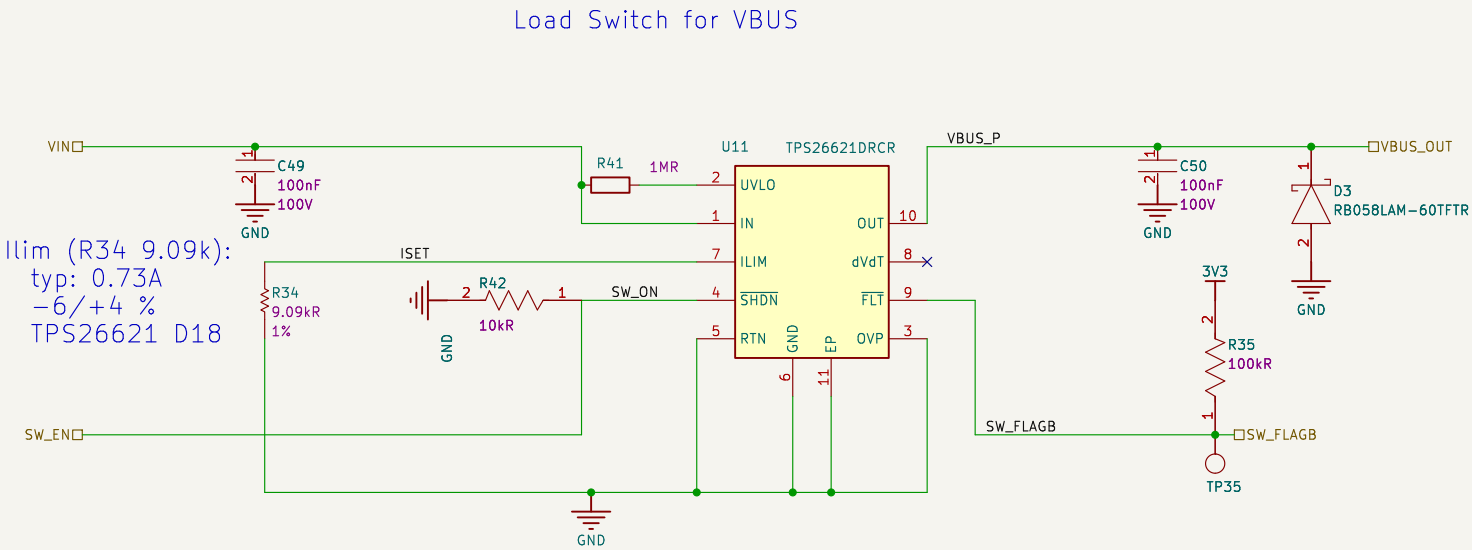


Sheet: /Top-Level Schematic/Load Switch/ File: BM_Mote_1_Load.kicad_sch			
Title: Load Switch		Load Switch	
Size: A3	Date:	Rev: AA	
KiCad E.D.A. 9.0.6		PCB-000001-AA	Id: 4/7

Power Over Dataline


Coupling Network – Port 1

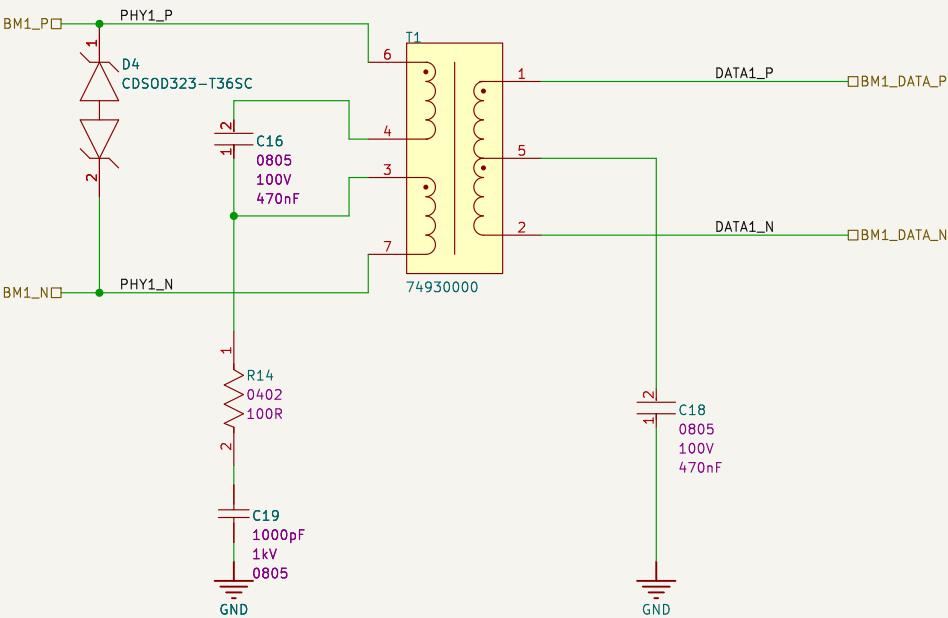


Coupling Network – Port 2

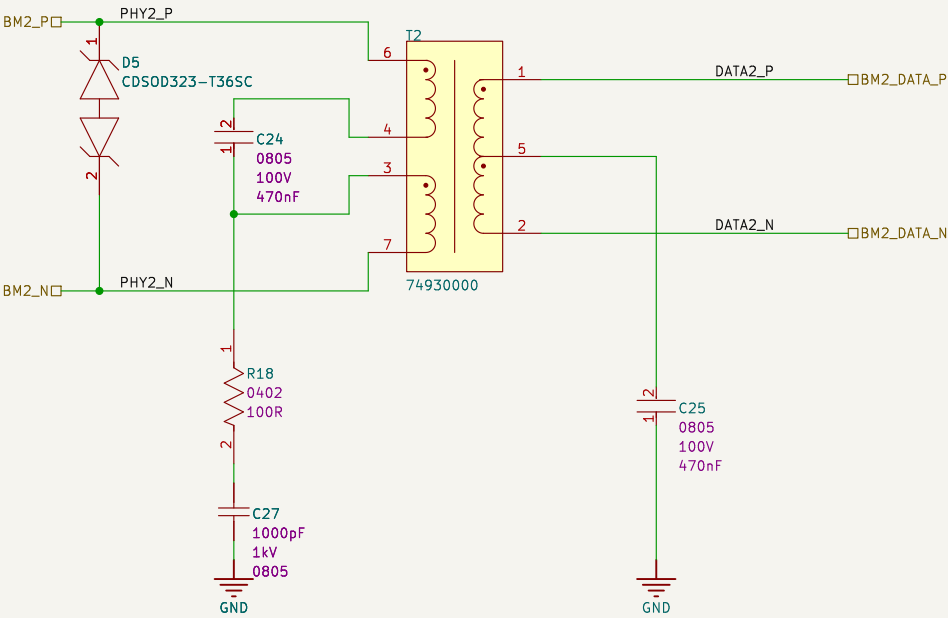

Port 1

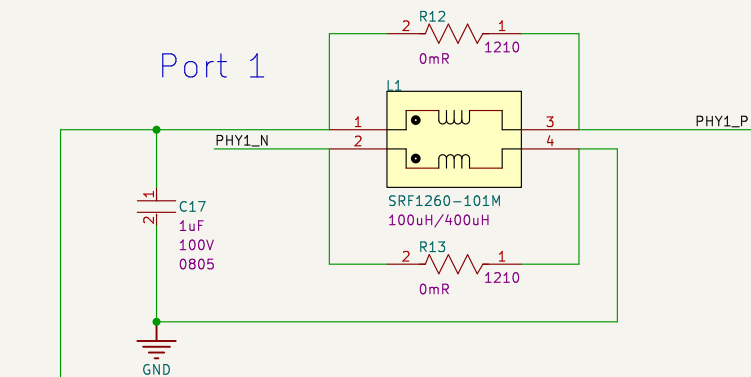



DC Connection + Circuit protections

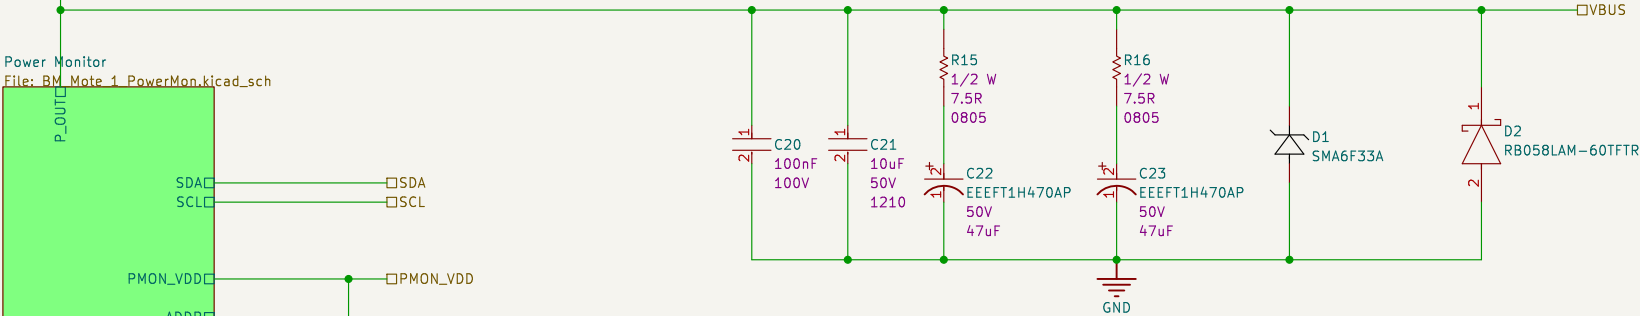


Snubber resistors must be at least 1/2 W, to support hot-plugging.

Port 2

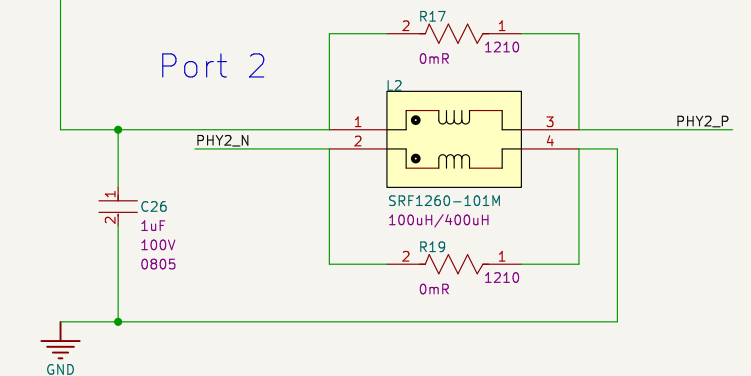

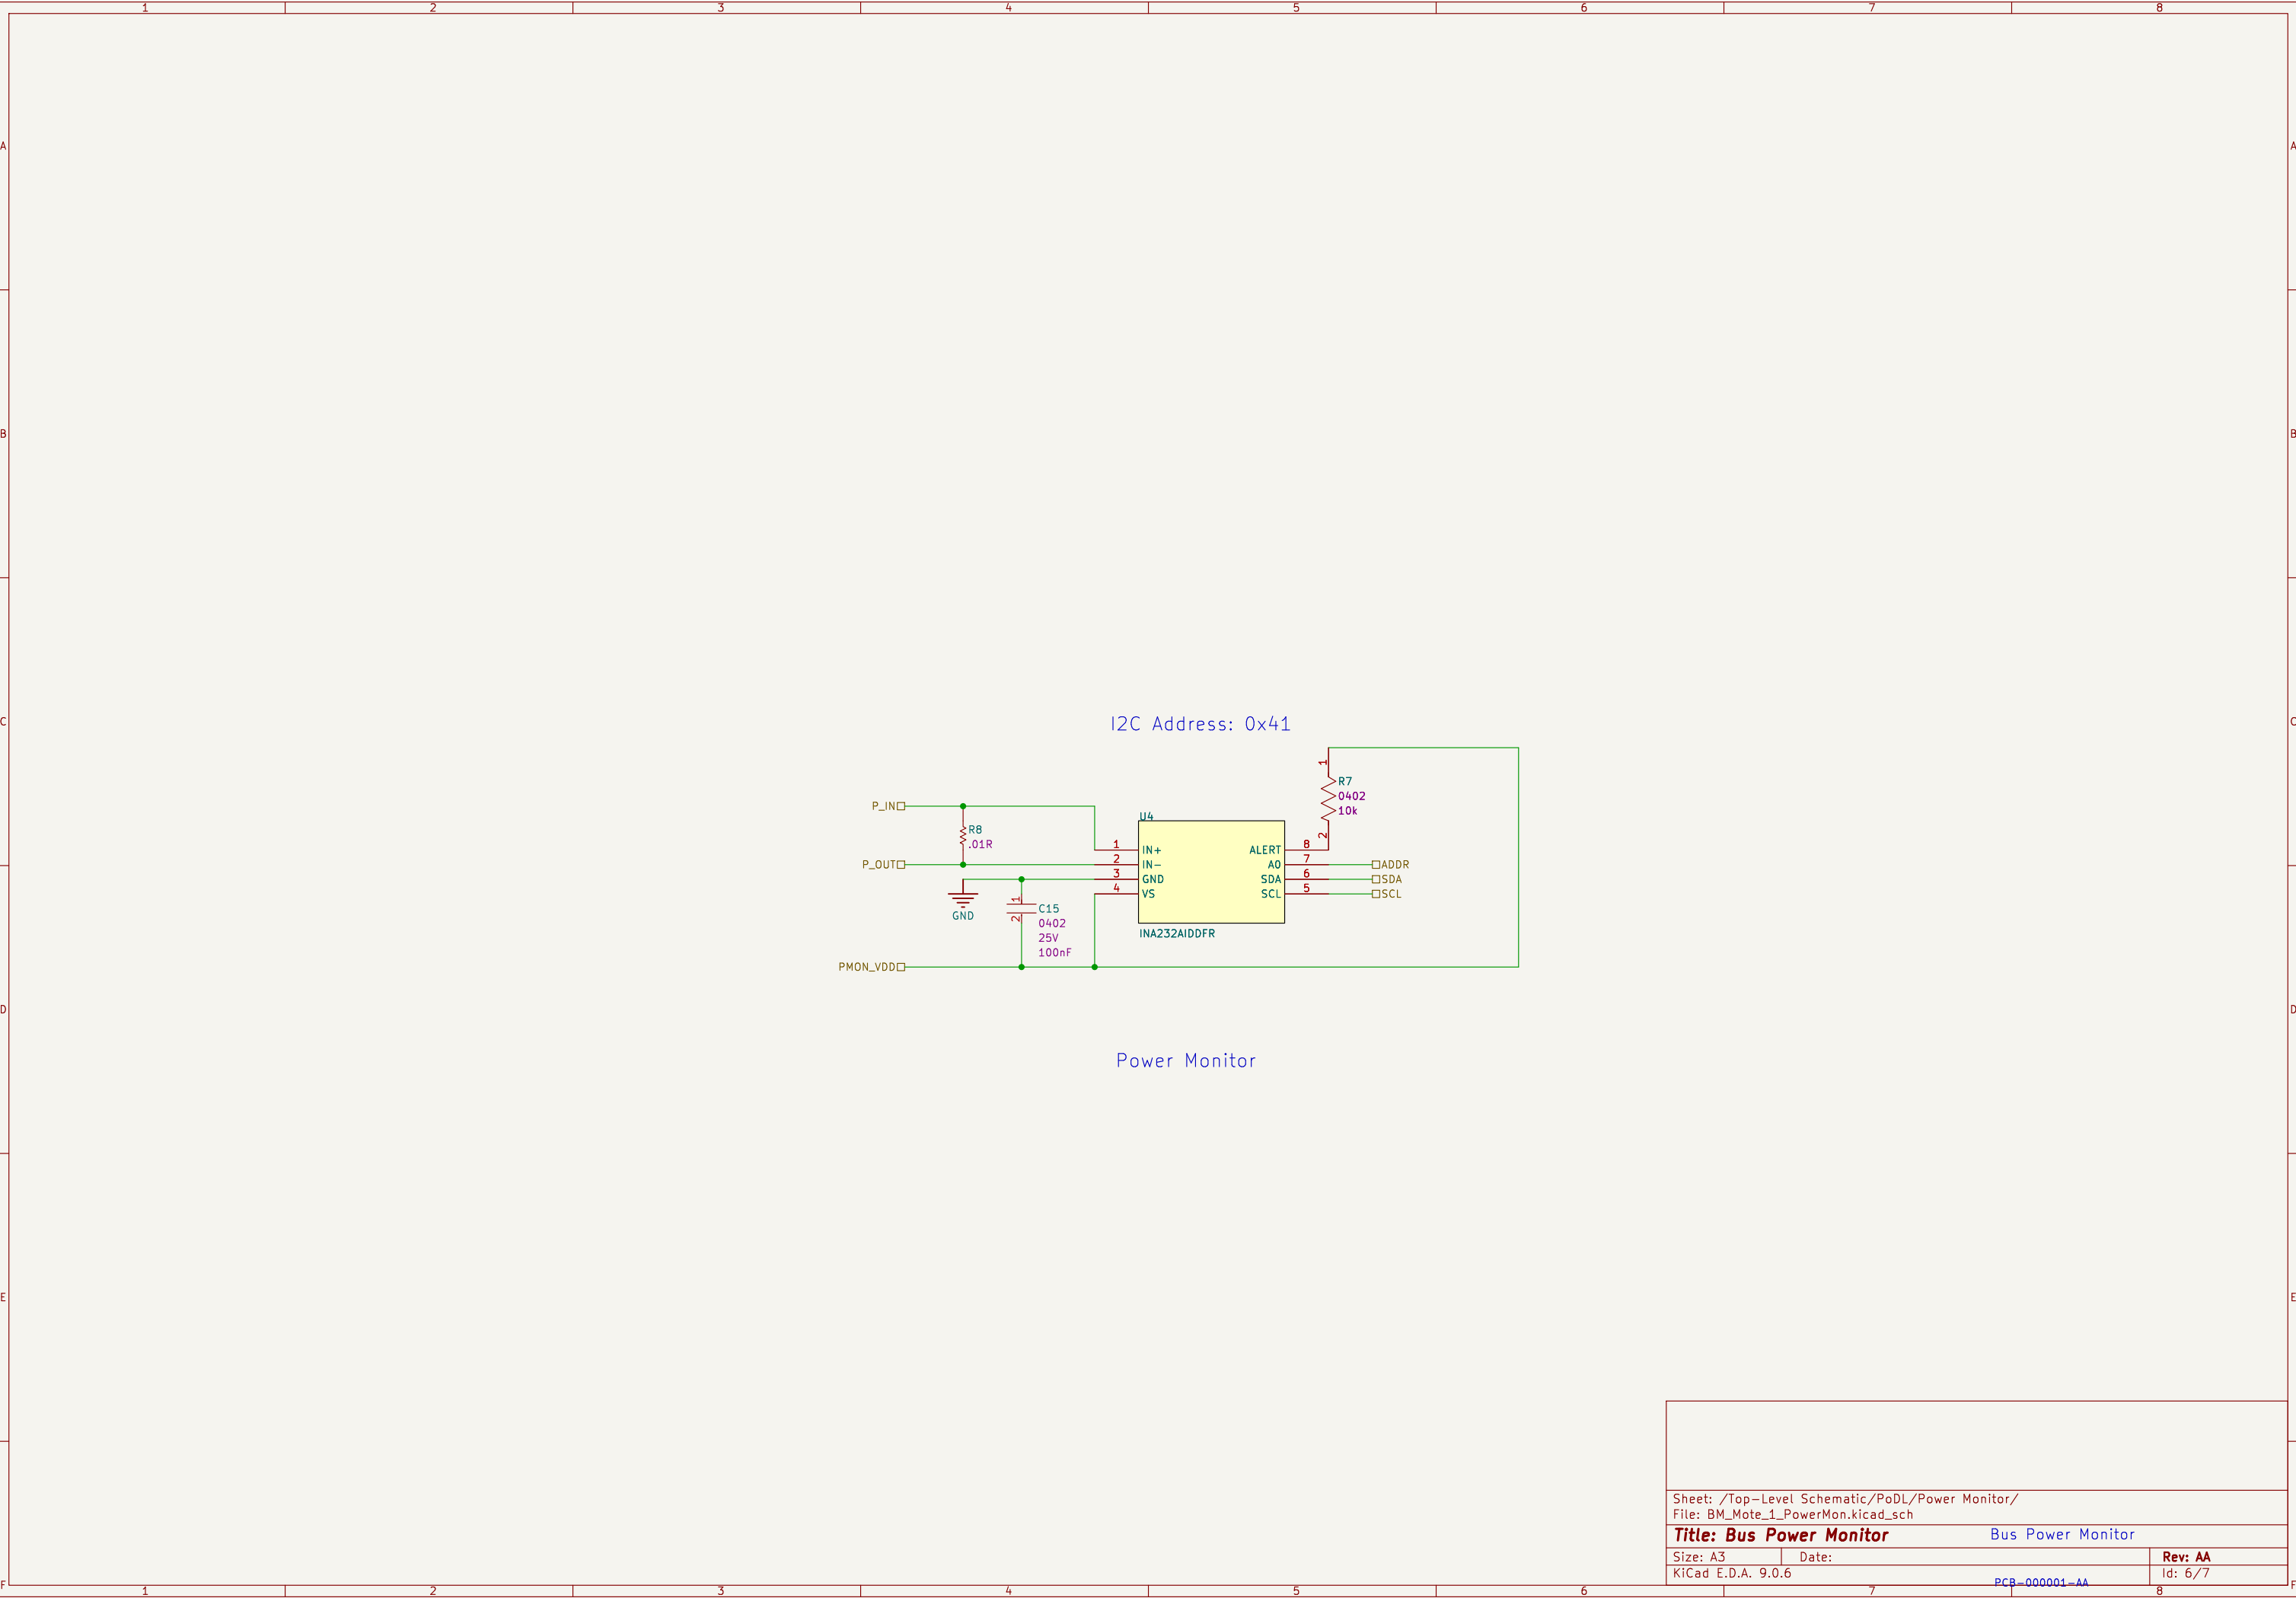

Buck Converters – 3V3, 1V8, 5V

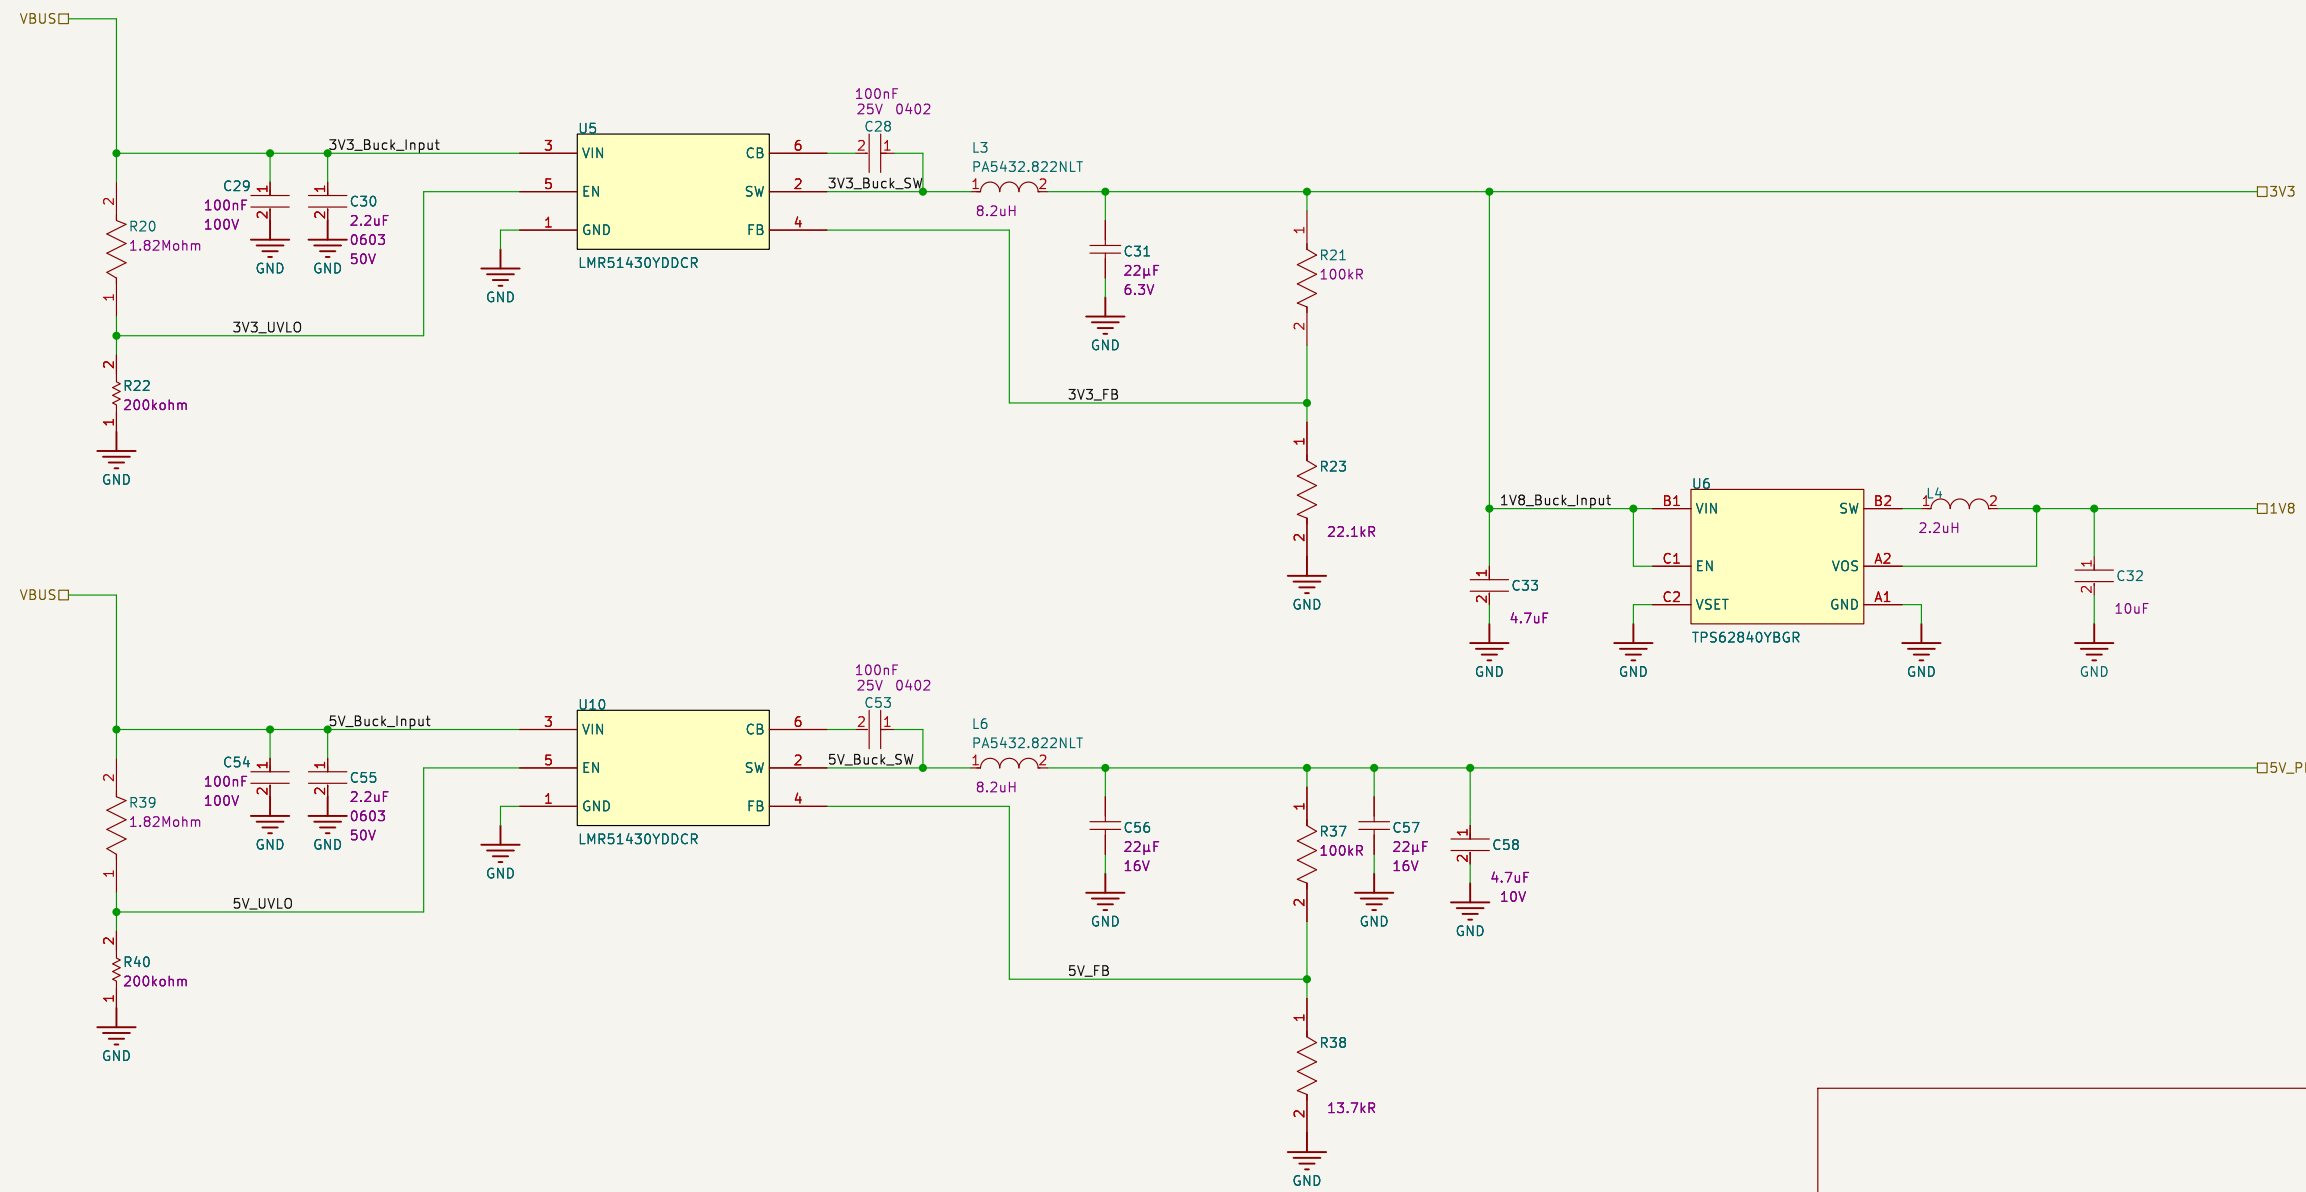

Sheet: /Top-Level Schematic/Power Regulators/ File: BM_Mote_1_Power.kicad_sch			
Title: Power		Power	
Size: A3	Date:	Rev: AA	
KiCad E.D.A. 9.0.6		PCB-000001-AA	