


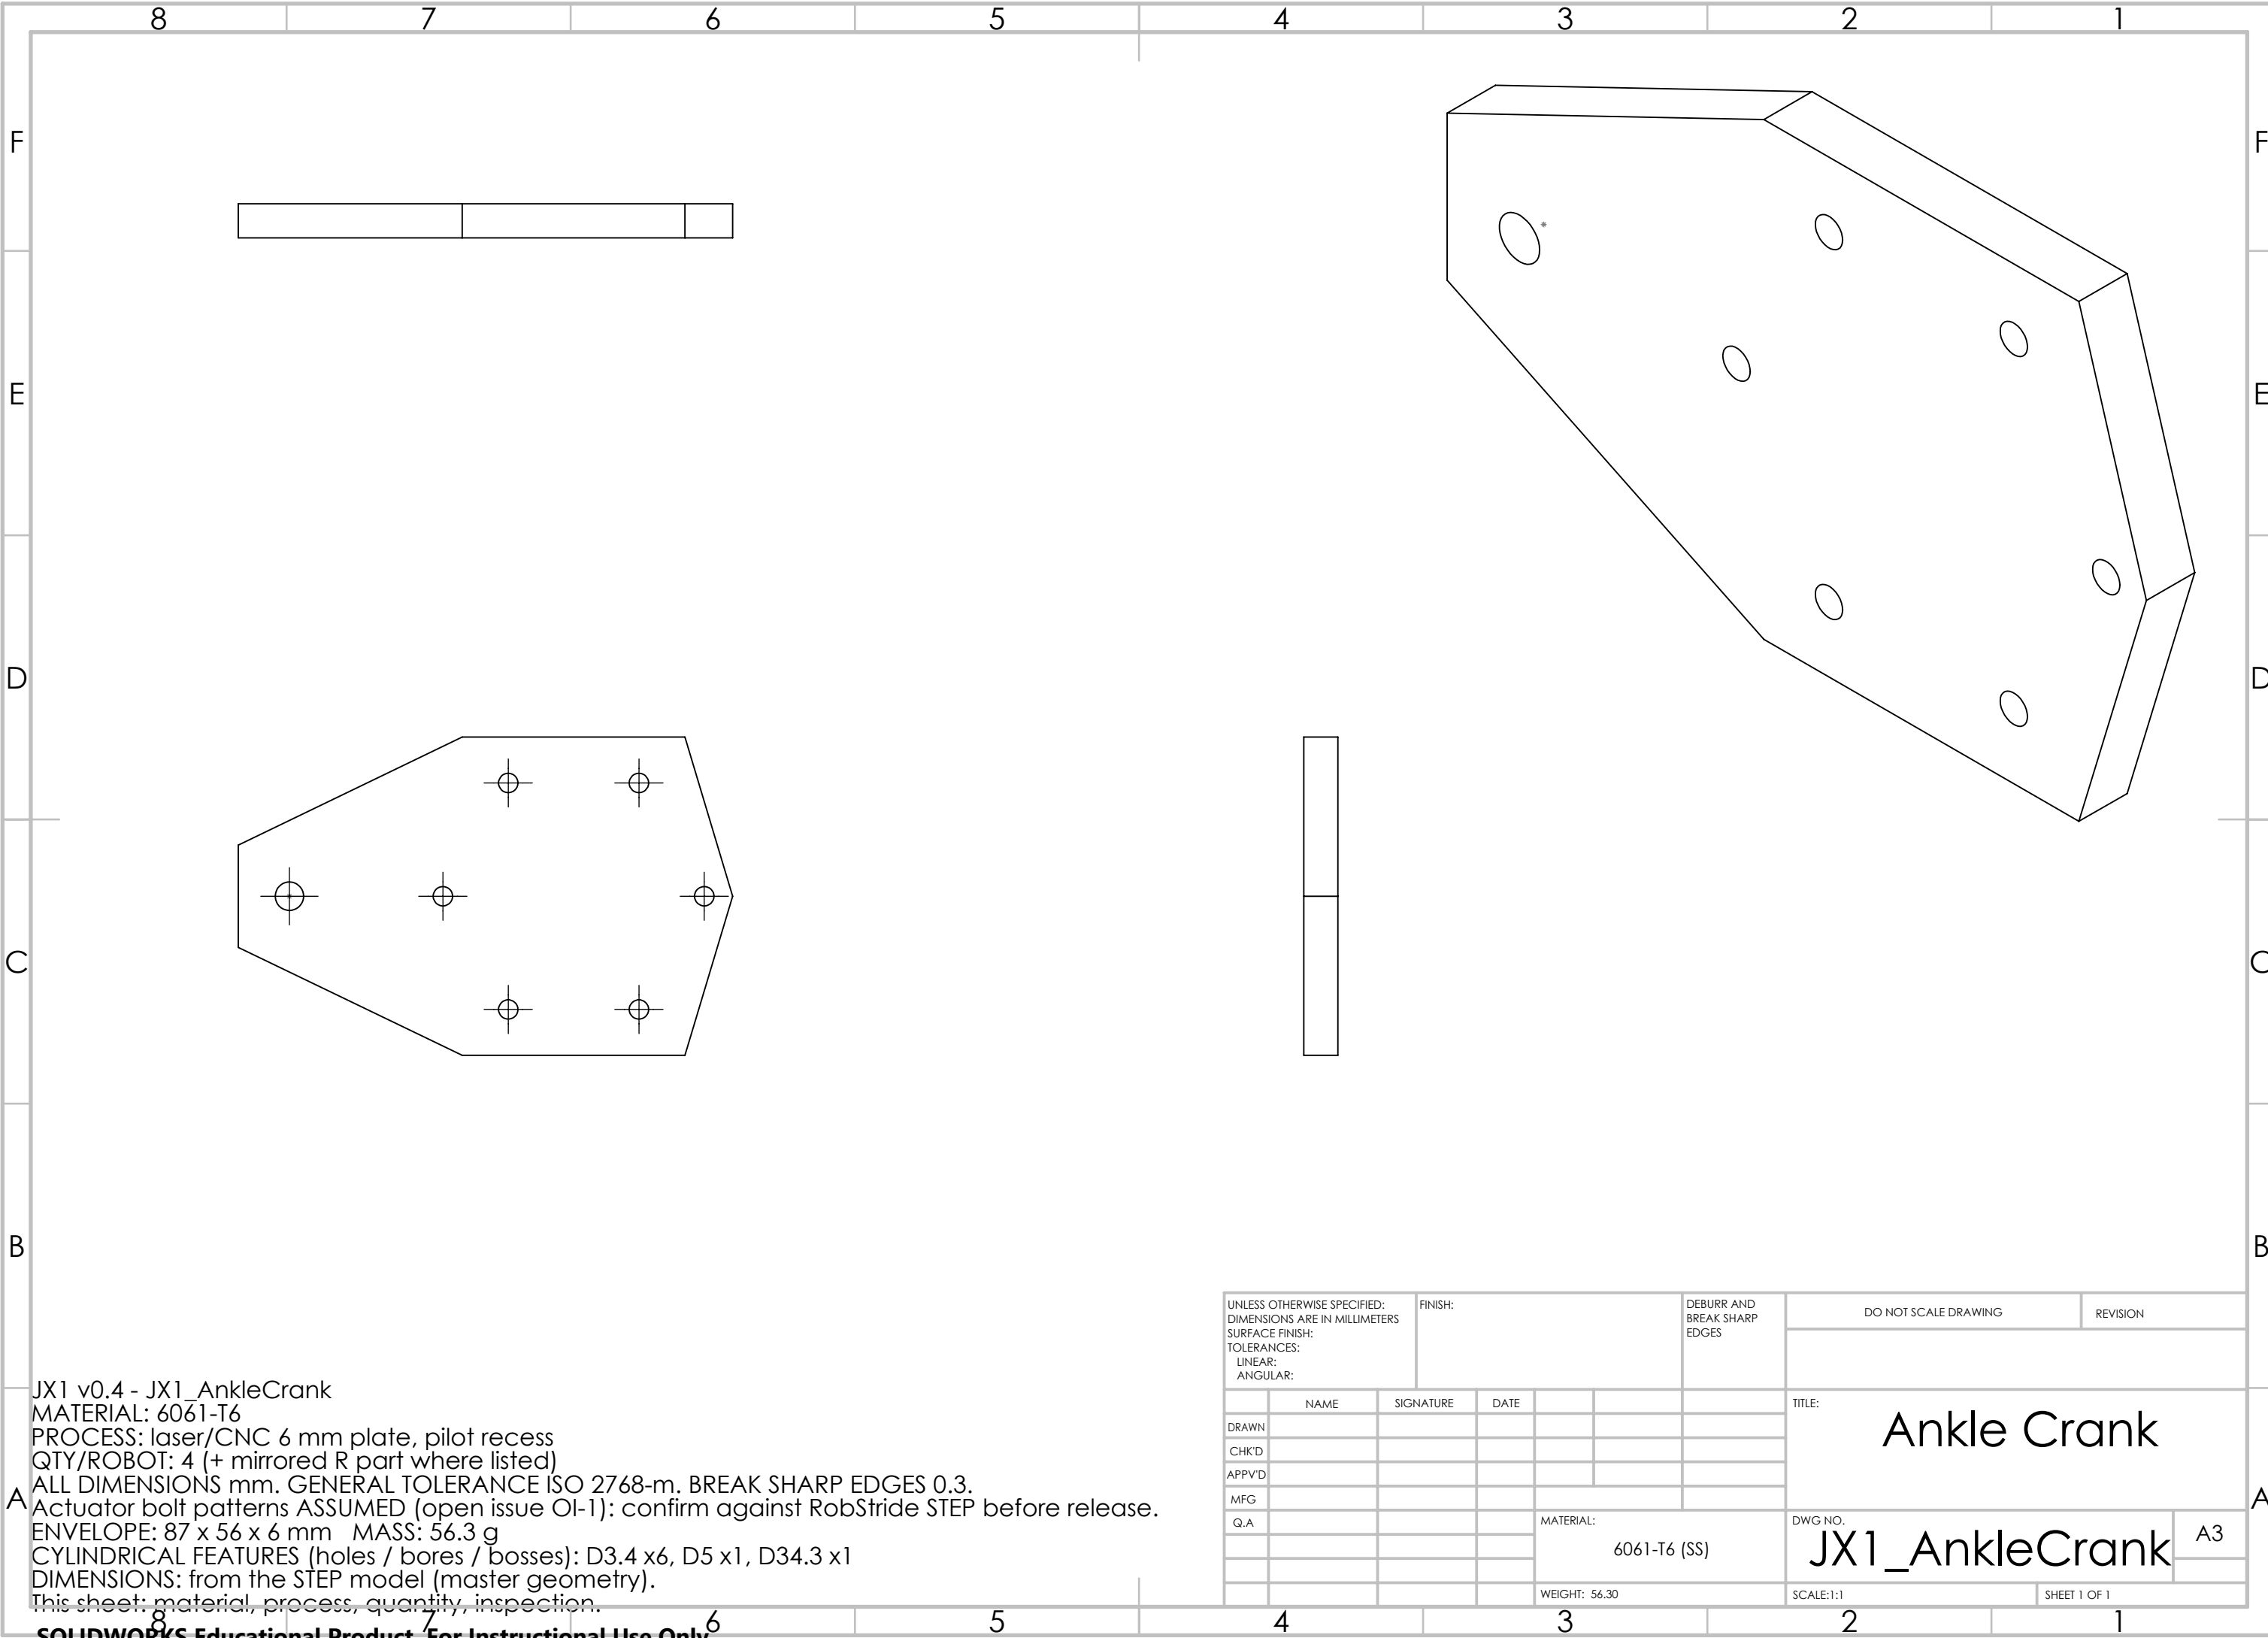

JX1 v0.4 - JX1_AnkleCrank
MATERIAL: 6061-T6
PROCESS: laser/CNC 6 mm plate, pilot recess
QTY/ROBOT: 4 (+ mirrored R part where listed)
ALL DIMENSIONS mm. GENERAL TOLERANCE ISO 2768-m. BREAK SHARP EDGES 0.3.
Actuator bolt patterns ASSUMED (open issue OI-1): confirm against RobStride STEP before release.
ENVELOPE: 87 x 56 x 6 mm MASS: 56.3 g
CYLINDRICAL FEATURES (holes / bores / bosses): D3.4 x6, D5 x1, D34.3 x1
DIMENSIONS: from the STEP model (master geometry).
This sheet: material, process, quantity, inspection.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:					FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING			REVISION		
	NAME		SIGNATURE		DATE						TITLE:			
DRAWN										Ankle Crank				
CHK'D														
APPV'D														
MFG														
Q.A														
					MATERIAL: 6061-T6 (SS)			DWG NO.			A3			
								JX1_AnkleCrank						
					WEIGHT: 56.30			SCALE:1:1			SHEET 1 OF 1			