


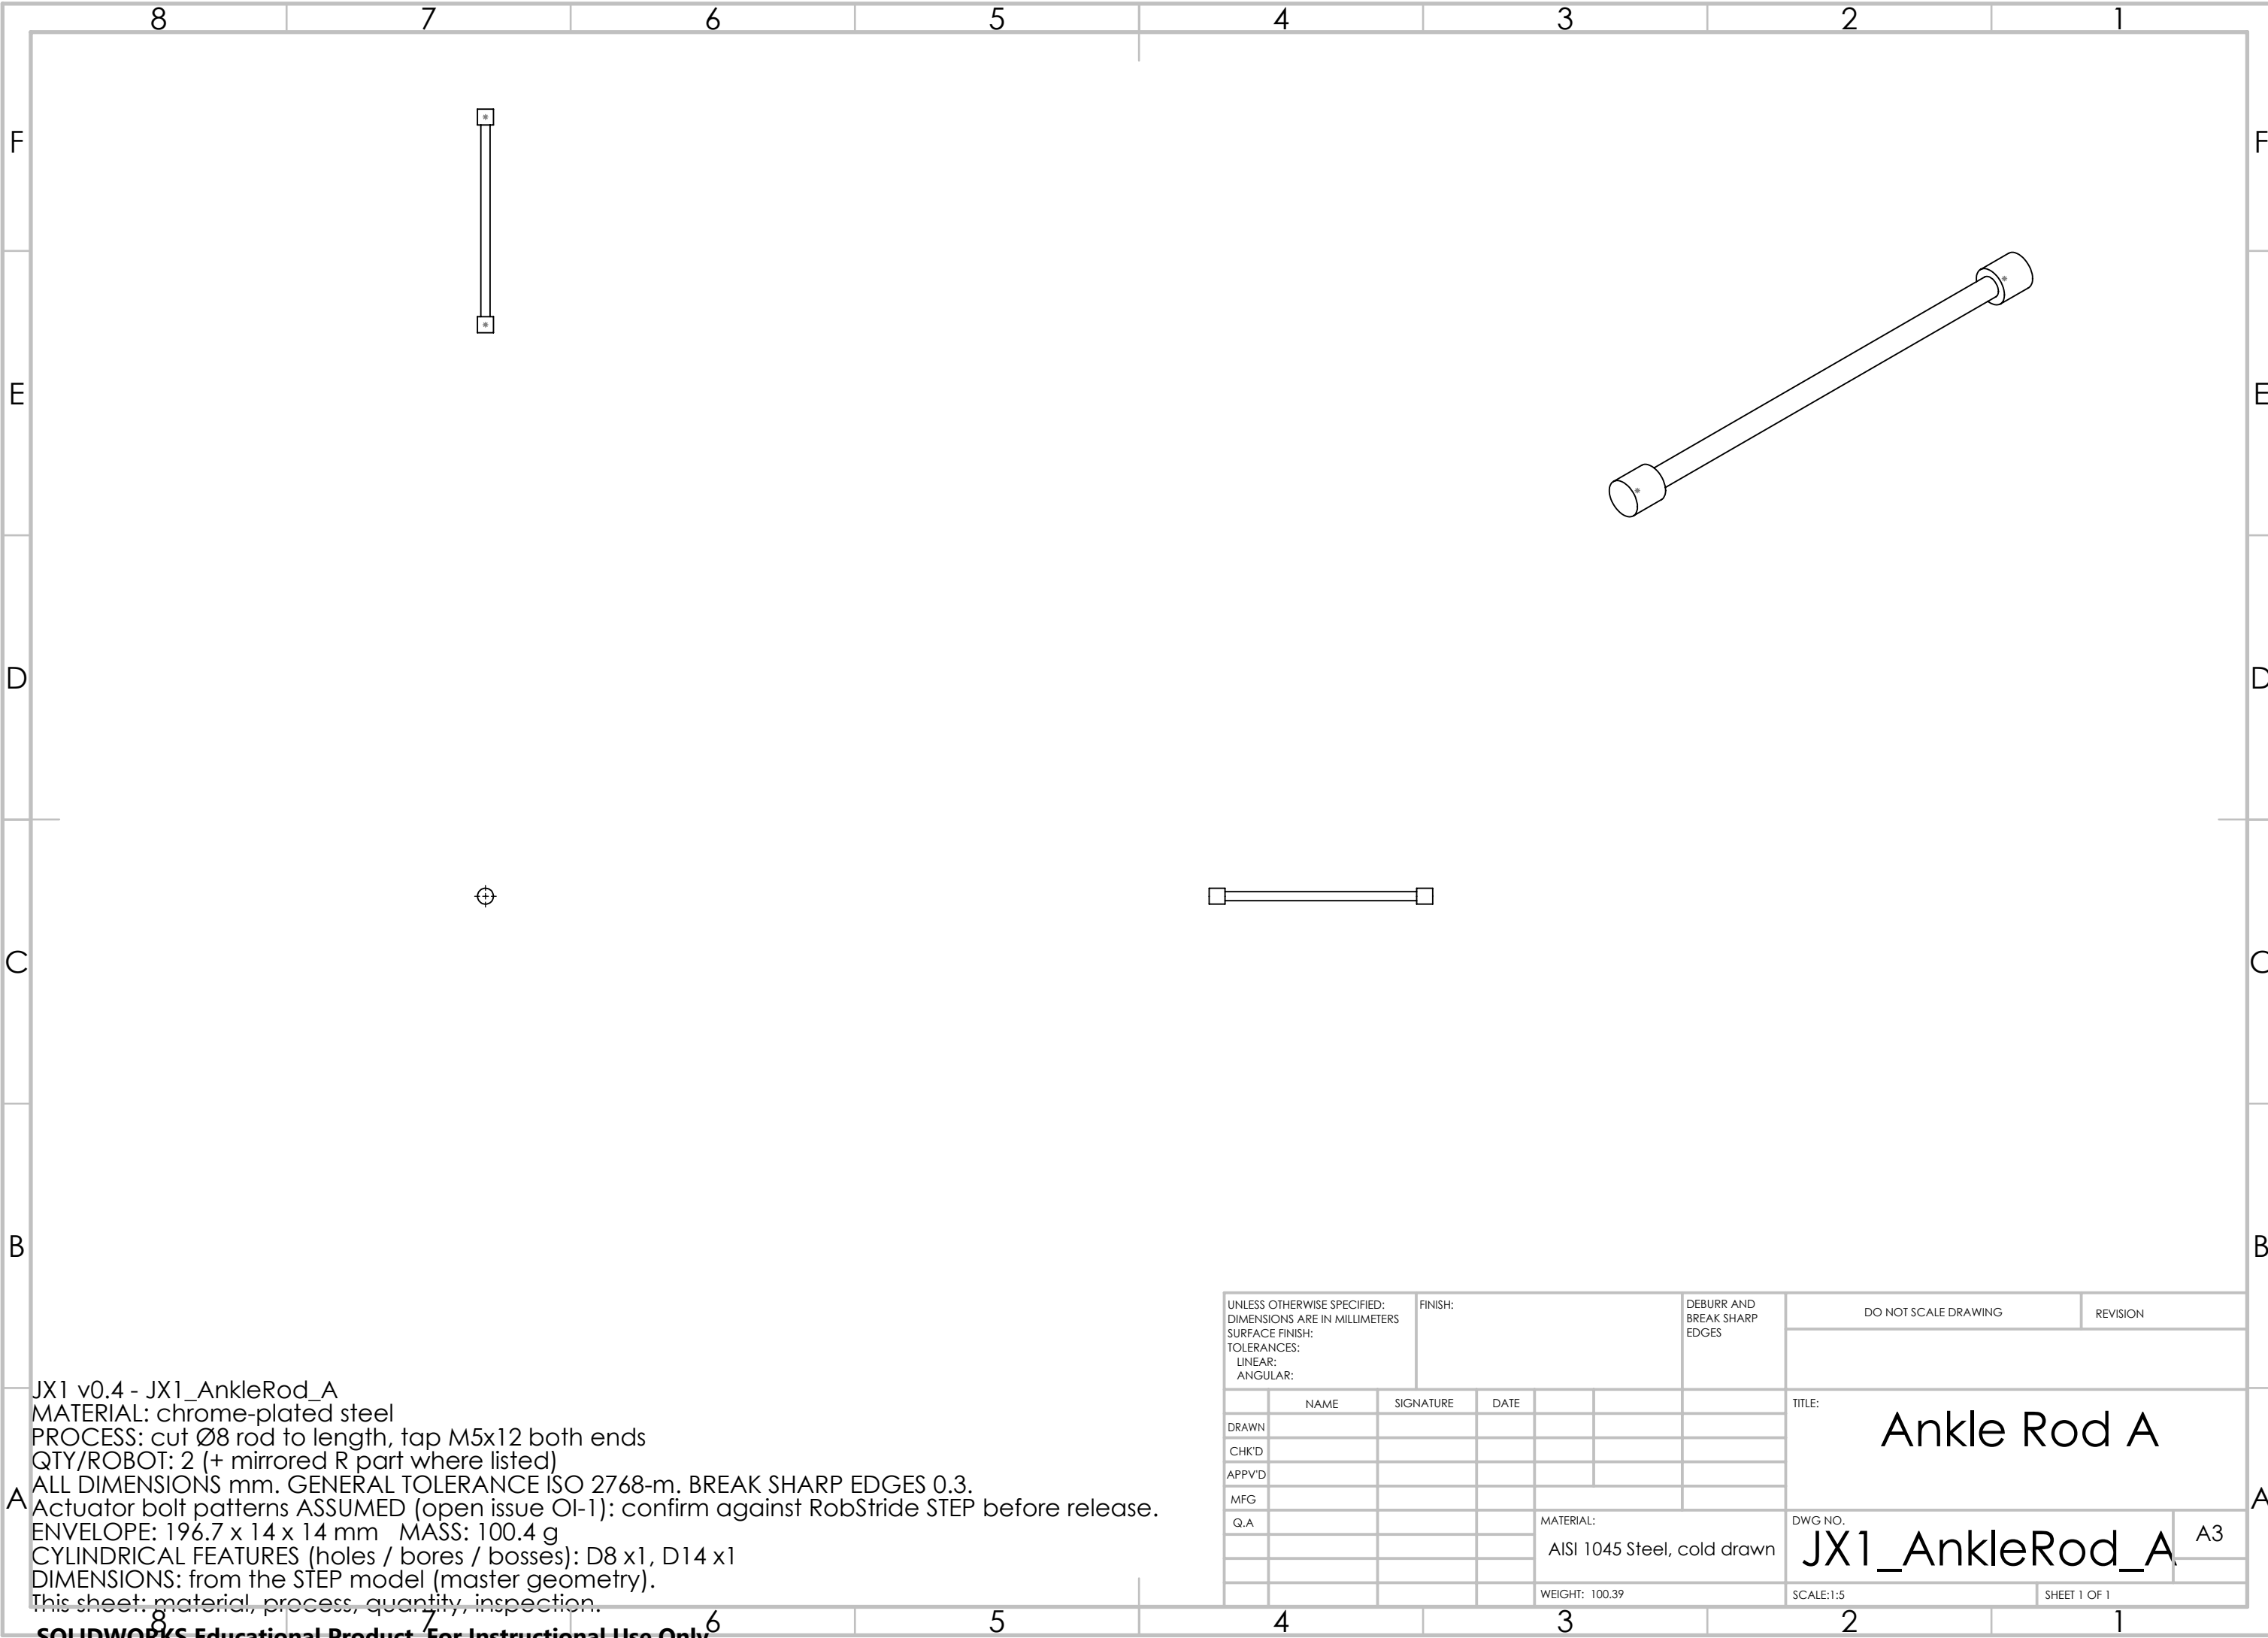

JX1 v0.4 - JX1_AnkleRod_A
MATERIAL: chrome-plated steel
PROCESS: cut Ø8 rod to length, tap M5x12 both ends
QTY/ROBOT: 2 (+ mirrored R part where listed)
ALL DIMENSIONS mm. GENERAL TOLERANCE ISO 2768-m. BREAK SHARP EDGES 0.3.
Actuator bolt patterns ASSUMED (open issue OI-1): confirm against RobStride STEP before release.
ENVELOPE: 196.7 x 14 x 14 mm MASS: 100.4 g
CYLINDRICAL FEATURES (holes / bores / bosses): D8 x1, D14 x1
DIMENSIONS: from the STEP model (master geometry).
This sheet: material, process, quantity, inspection.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE				TITLE: Ankle Rod A	
DRAWN								
CHK'D								
APPV'D								
MFG								
Q.A							DWG NO. JX1_AnkleRod_A A3	
						MATERIAL: AISI 1045 Steel, cold drawn		
						WEIGHT: 100.39	SCALE:1:5	SHEET 1 OF 1