




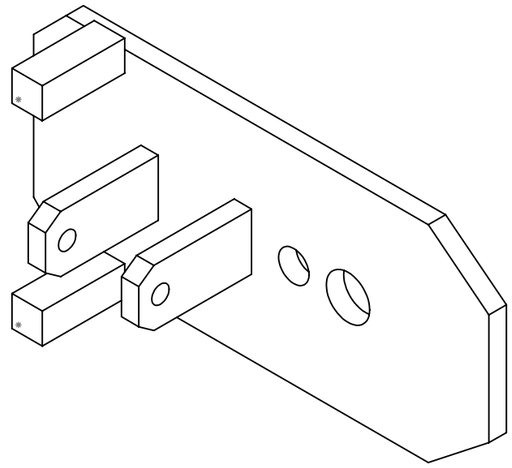

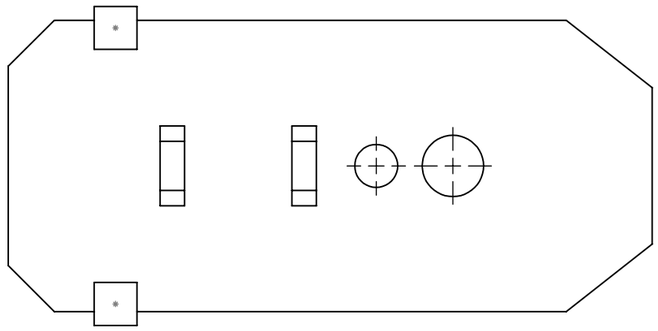



JX1 v0.4 - JX1_Foot_L
MATERIAL: 6061-T6
PROCESS: laser 8 mm sole + bolted clevis tines and posts
QTY/ROBOT: 1 (+ mirrored R part where listed)
ALL DIMENSIONS mm. GENERAL TOLERANCE ISO 2768-m. BREAK SHARP EDGES 0.3.
Actuator bolt patterns ASSUMED (open issue OI-1): confirm against RobStride STEP before release.
ENVELOPE: 210 x 104 x 60 mm MASS: 497.6 g
CYLINDRICAL FEATURES (holes / bores / bosses): D8 x1, D14 x1, D20 x1
DIMENSIONS: from the STEP model (master geometry).
This sheet: material, process, quantity, inspection.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE			TITLE: Foot L	
DRAWN							
CHK'D							
APPV'D							
MFG							
Q.A				MATERIAL: 6061-T6 (SS)		DWG NO. JX1_Foot_L	A3
				WEIGHT: 497.59		SCALE:1:2	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.