


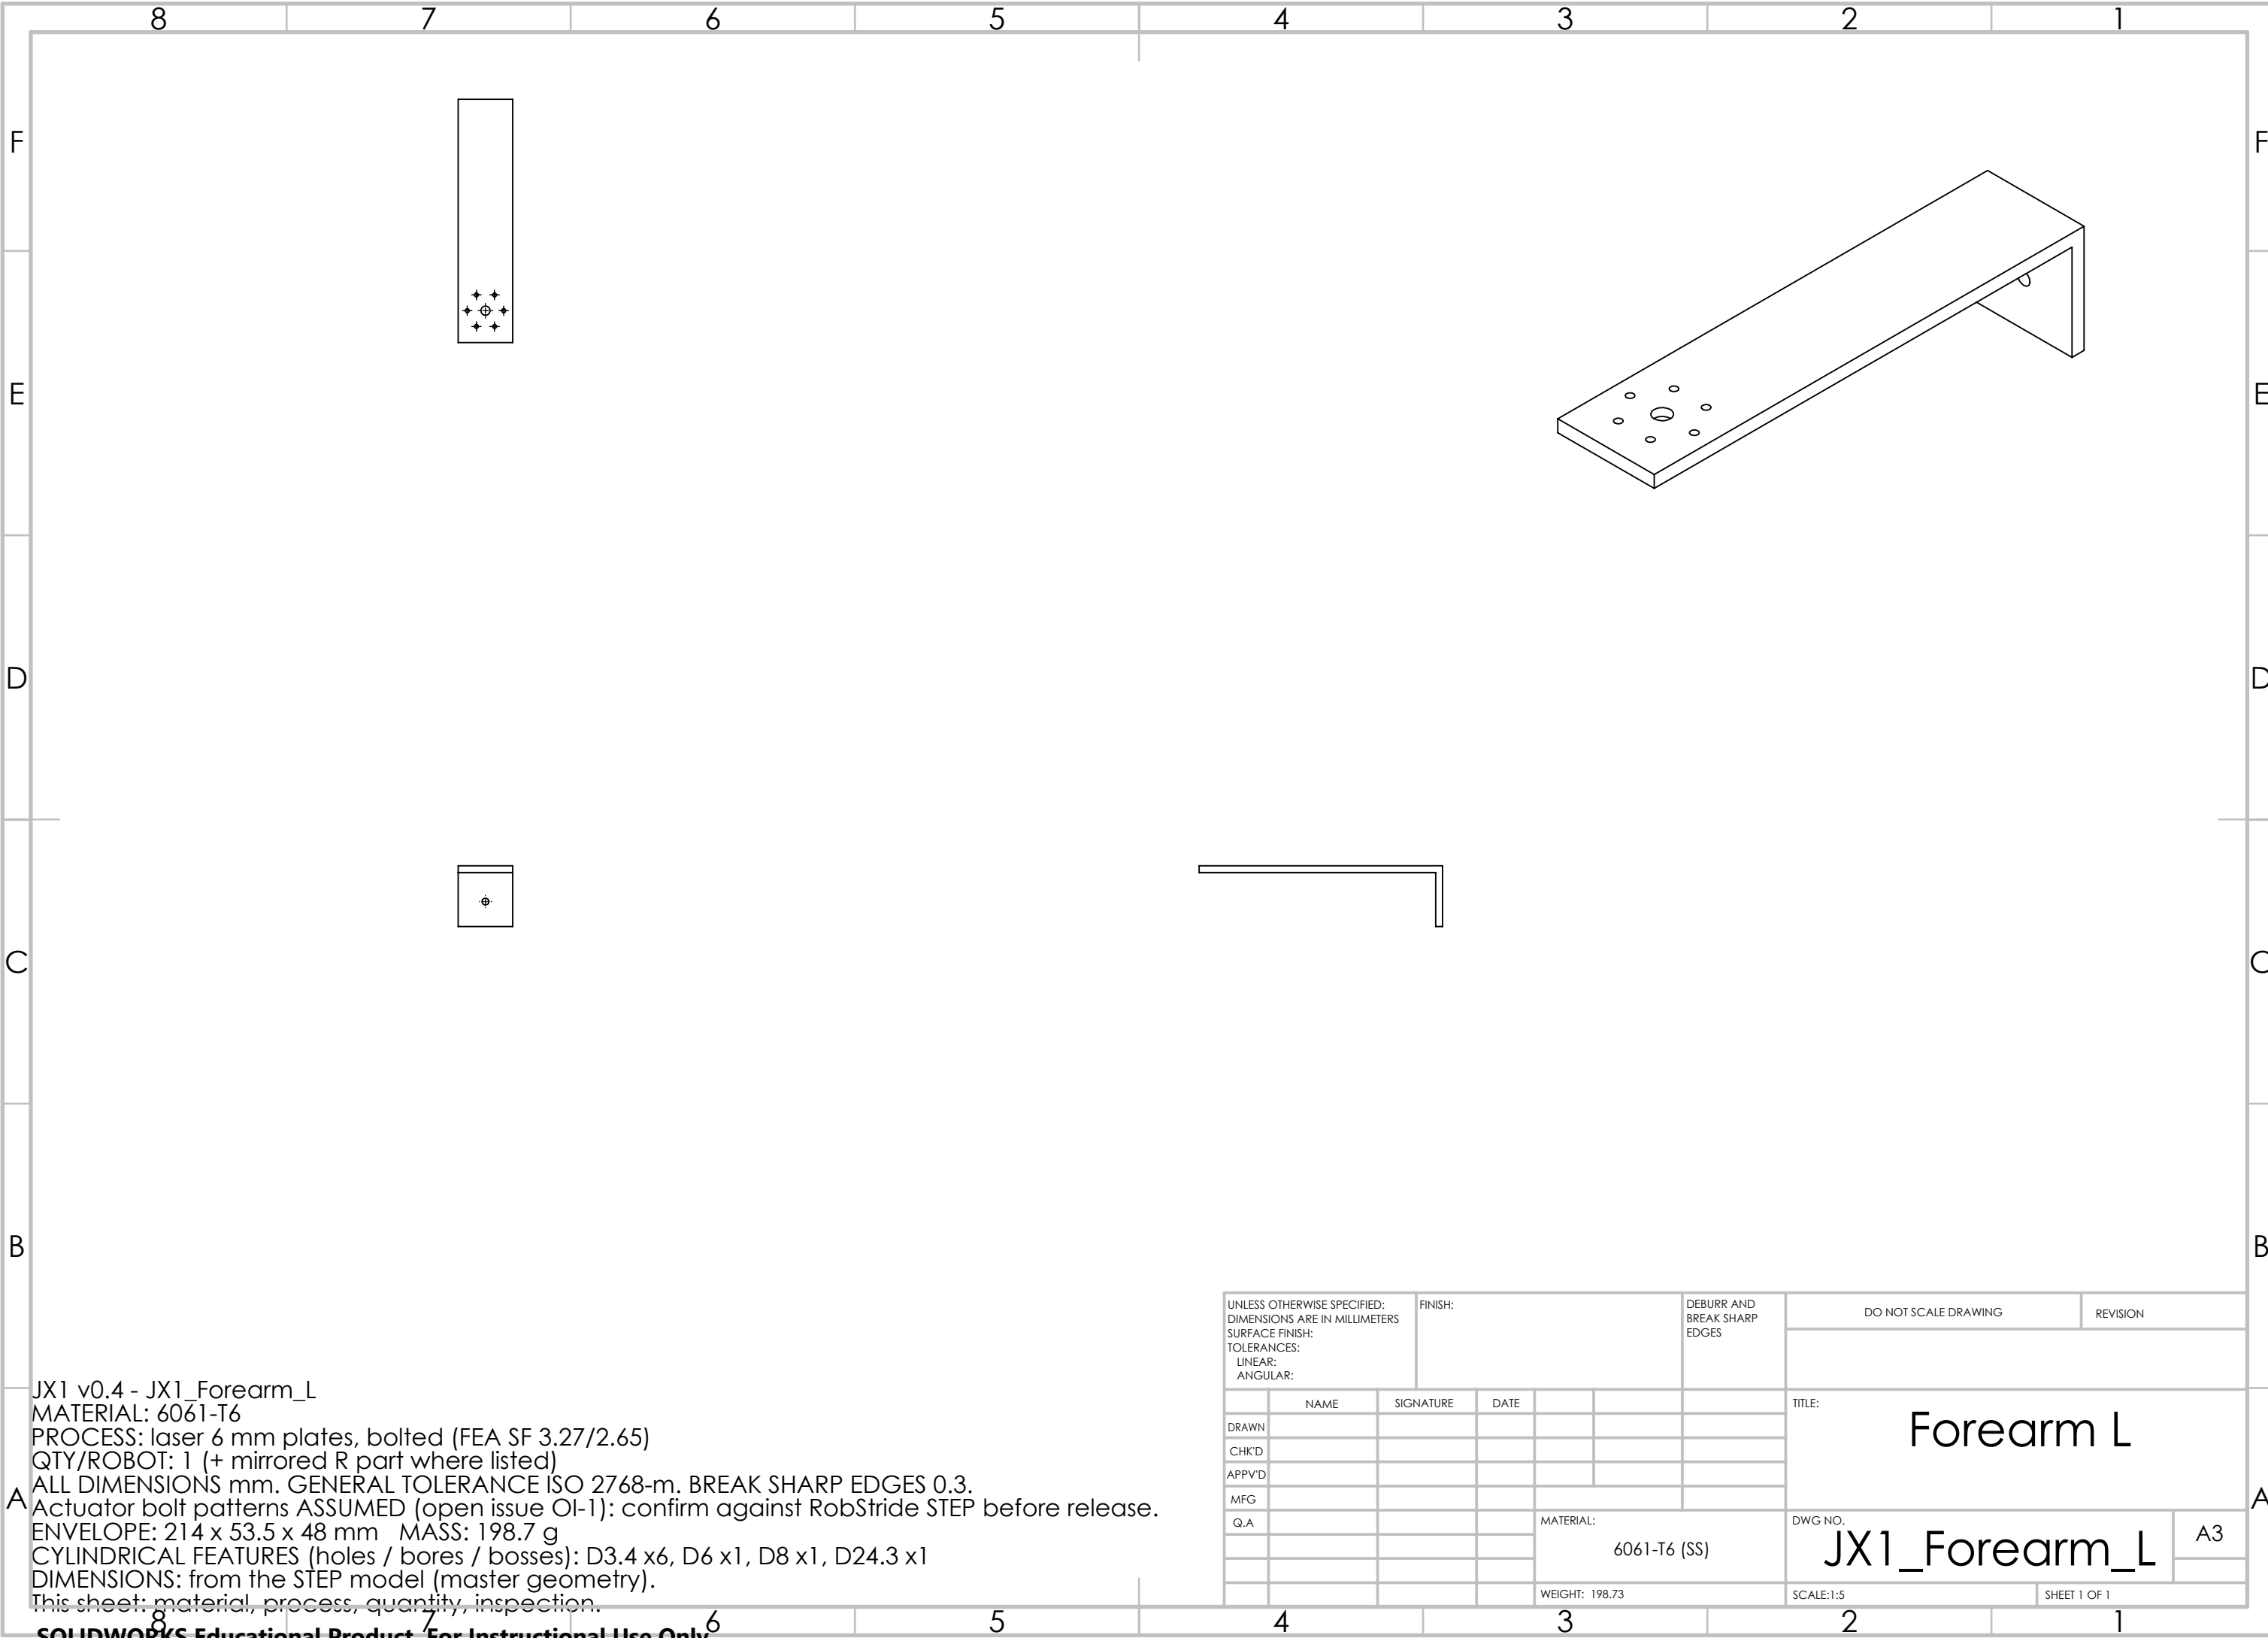

JX1 v0.4 - JX1_Forearm_L
MATERIAL: 6061-T6
PROCESS: laser 6 mm plates, bolted (FEA SF 3.27/2.65)
QTY/ROBOT: 1 (+ mirrored R part where listed)
ALL DIMENSIONS mm. GENERAL TOLERANCE ISO 2768-m. BREAK SHARP EDGES 0.3.
Actuator bolt patterns ASSUMED (open issue OI-1): confirm against RobStride STEP before release.
ENVELOPE: 214 x 53.5 x 48 mm MASS: 198.7 g
CYLINDRICAL FEATURES (holes / bores / bosses): D3.4 x6, D6 x1, D8 x1, D24.3 x1
DIMENSIONS: from the STEP model (master geometry).
This sheet: material, process, quantity, inspection.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE				TITLE: Forearm L	
DRAWN								
CHK'D								
APPV'D								
MFG								
Q.A							DWG NO.	A3
						MATERIAL: 6061-T6 (SS)	JX1_Forearm_L	
						WEIGHT: 198.73	SCALE:1:5	SHEET 1 OF 1