


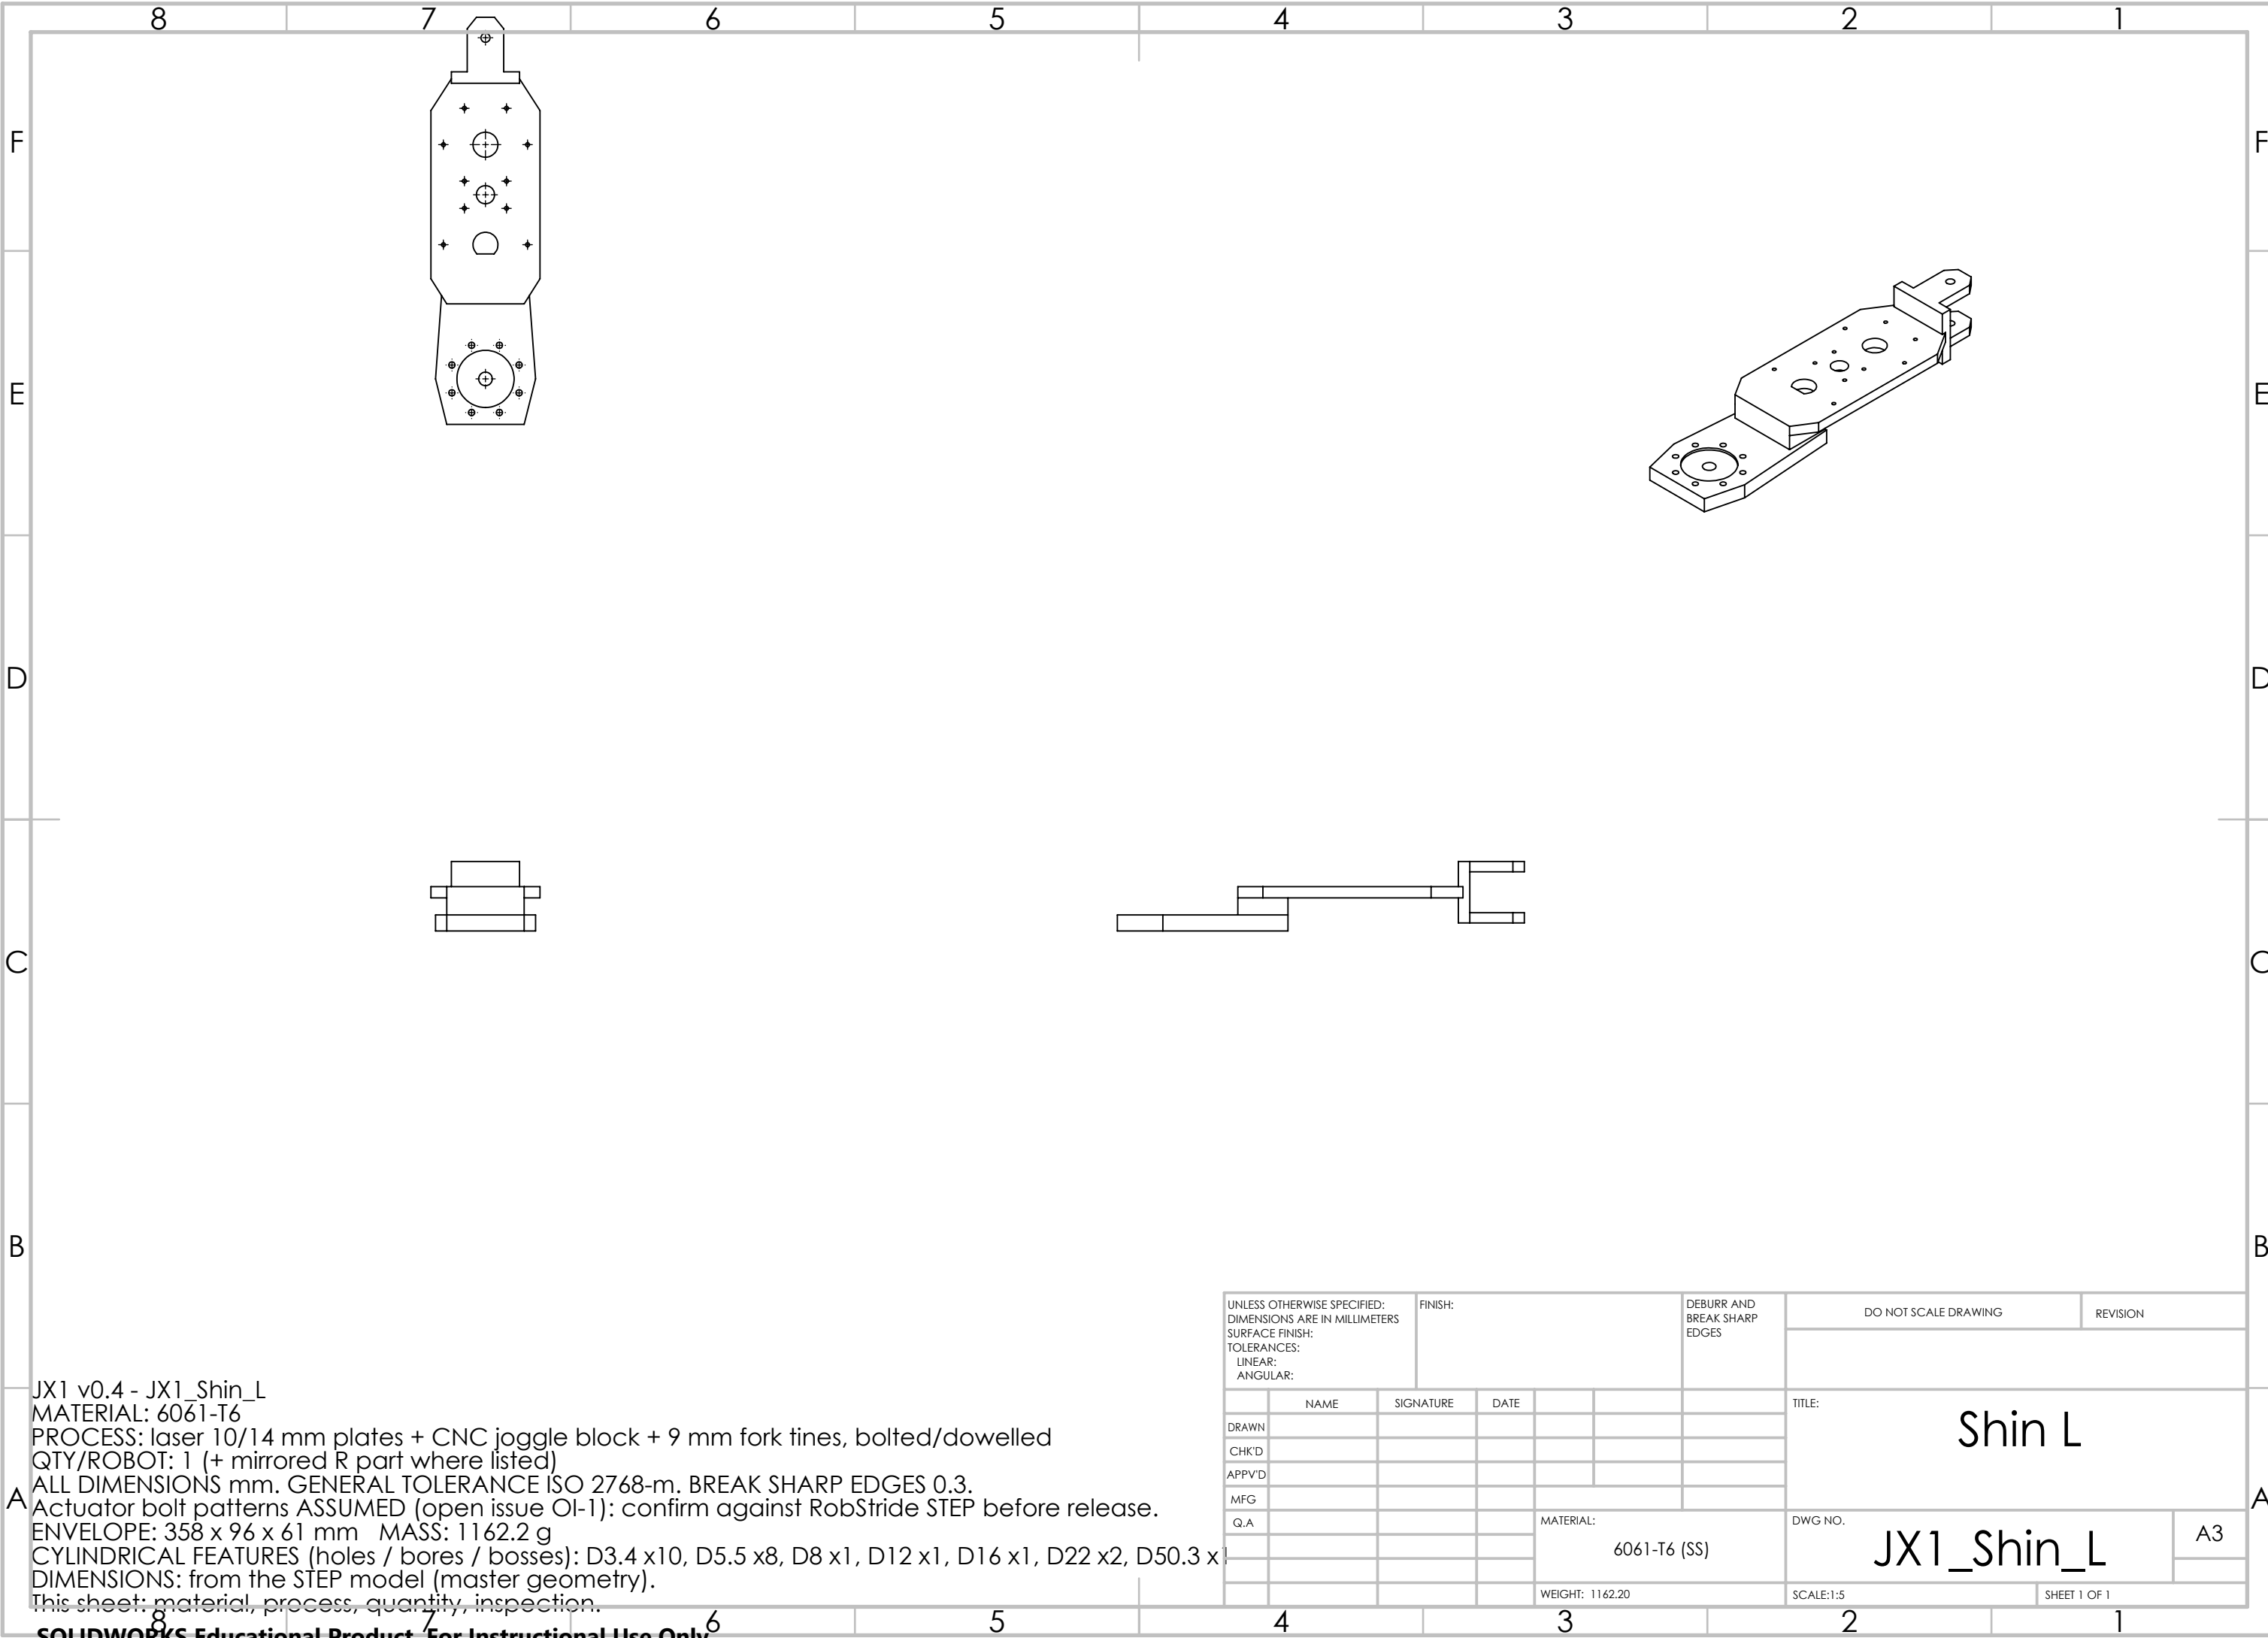

JX1 v0.4 - JX1_Shin_L
MATERIAL: 6061-T6
PROCESS: laser 10/14 mm plates + CNC joggle block + 9 mm fork tines, bolted/dowelled
QTY/ROBOT: 1 (+ mirrored R part where listed)
ALL DIMENSIONS mm. GENERAL TOLERANCE ISO 2768-m. BREAK SHARP EDGES 0.3.
Actuator bolt patterns ASSUMED (open issue OI-1): confirm against RobStride STEP before release.
ENVELOPE: 358 x 96 x 61 mm MASS: 1162.2 g
CYLINDRICAL FEATURES (holes / bores / bosses): D3.4 x10, D5.5 x8, D8 x1, D12 x1, D16 x1, D22 x2, D50.3 x1
DIMENSIONS: from the STEP model (master geometry).
This sheet: material, process, quantity, inspection.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE				TITLE: Shin L	
DRAWN								
CHK'D								
APPV'D								
MFG							DWG NO. JX1_Shin_L	
Q.A								
						MATERIAL: 6061-T6 (SS)	SCALE:1:5	
						WEIGHT: 1162.20	SHEET 1 OF 1	