
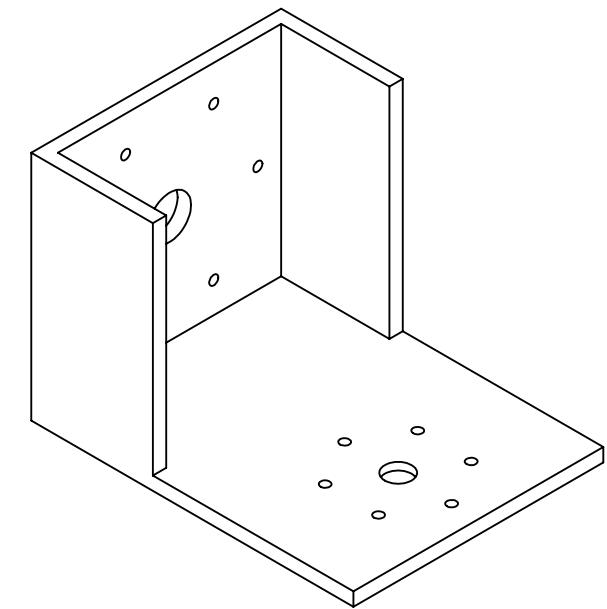
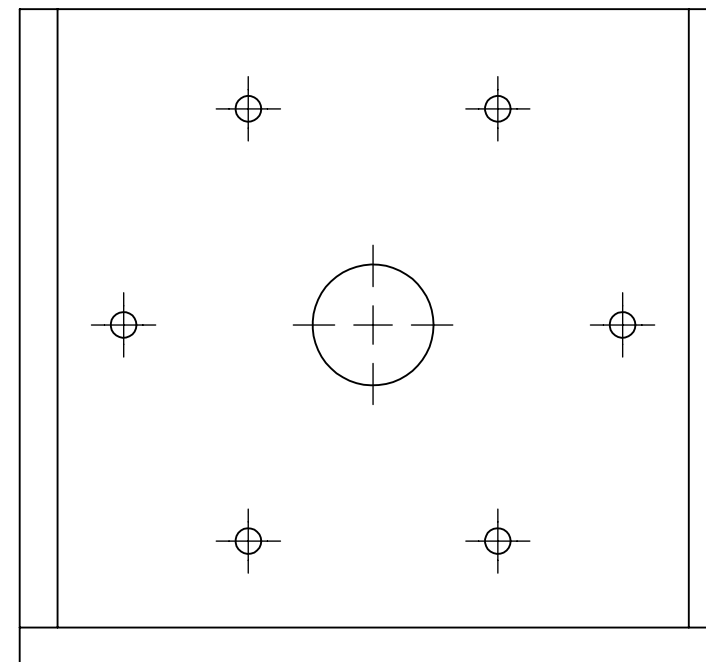



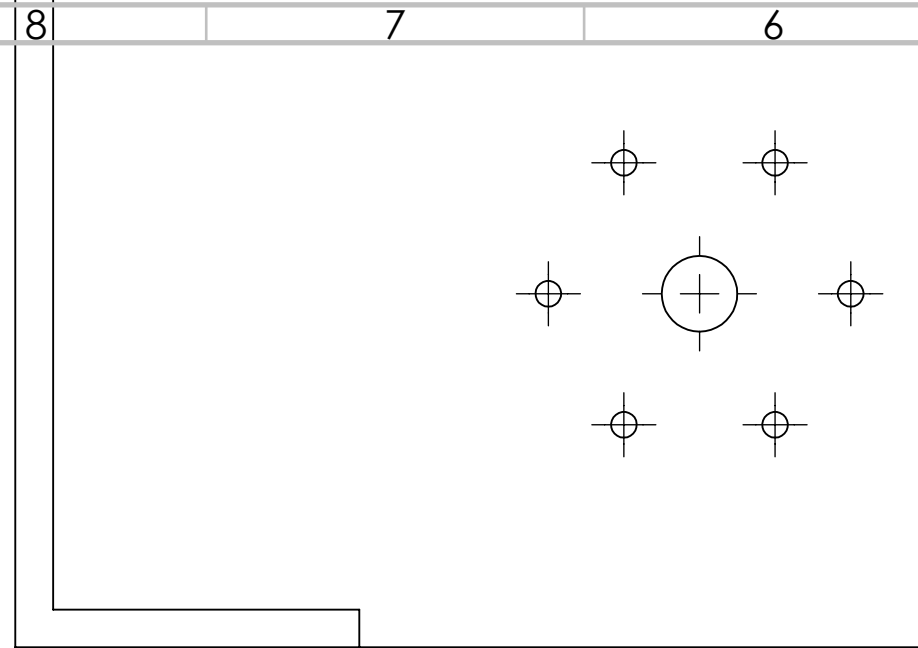

JX1 v0.4 - JX1_ShoulderPitchBracket_L
MATERIAL: 6061-T6
PROCESS: laser 5 mm plates, bolted U-bracket (FEA SF 2.17/1.75)
QTY/ROBOT: 1 (+ mirrored R part where listed)
ALL DIMENSIONS mm. GENERAL TOLERANCE ISO 2768-m. BREAK SHARP EDGES 0.3.
Actuator bolt patterns ASSUMED (open issue OI-1): confirm against RobStride STEP before release.
ENVELOPE: 120.5 x 93.5 x 86.8 mm MASS: 335.6 g
CYLINDRICAL FEATURES (holes / bores / bosses): D3.4 x12, D10 x1, D16 x1, D30.3 x1
DIMENSIONS: from the STEP model (master geometry).
This sheet: material, process, quantity, inspection.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:						FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
										TITLE: Shoulder Pitch Bracket L			
NAME		SIGNATURE		DATE									
DRAWN													
CHK'D													
APPV'D													
MFG													
Q.A.						MATERIAL:		DWG NO.				A3	
						6061-T6 (SS)		JX1_ShoulderPitchBracket					
						WEIGHT: 335.62		SCALE:1:1				SHEET 1 OF 1	