


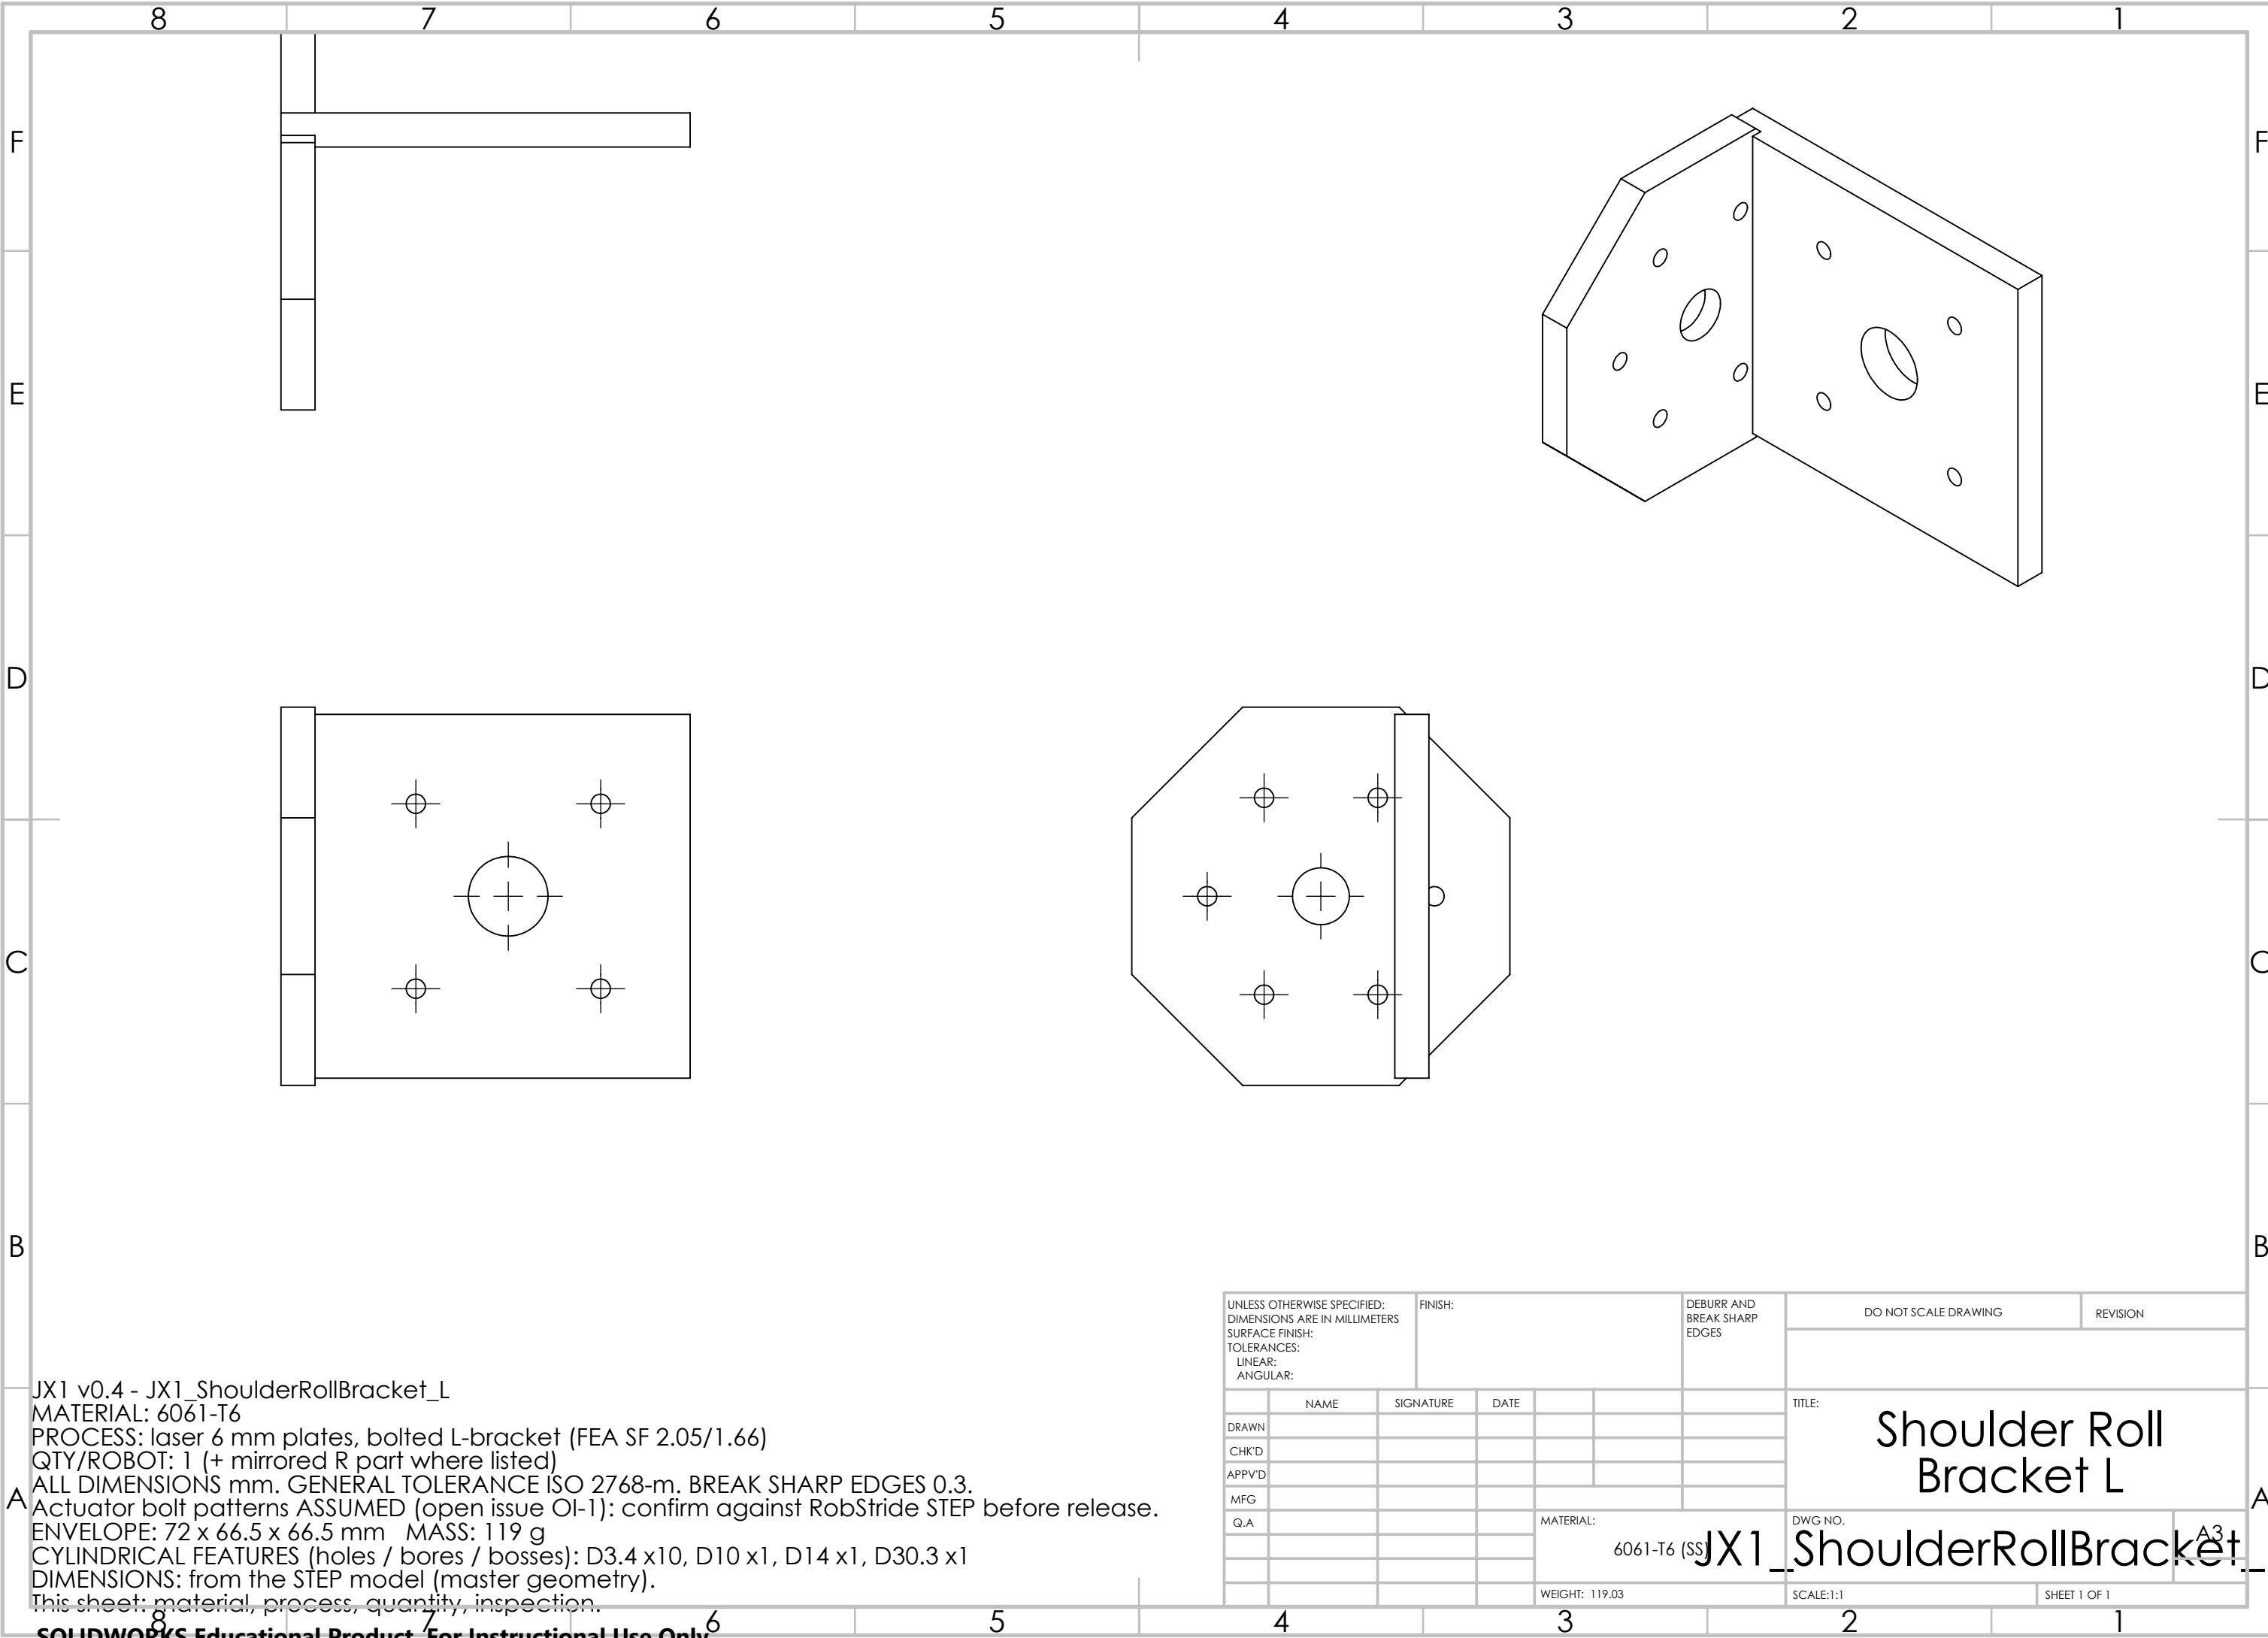

JX1 v0.4 - JX1_ShoulderRollBracket_L
MATERIAL: 6061-T6
PROCESS: laser 6 mm plates, bolted L-bracket (FEA SF 2.05/1.66)
QTY/ROBOT: 1 (+ mirrored R part where listed)
ALL DIMENSIONS mm. GENERAL TOLERANCE ISO 2768-m. BREAK SHARP EDGES 0.3.
Actuator bolt patterns ASSUMED (open issue OI-1): confirm against RobStride STEP before release.
ENVELOPE: 72 x 66.5 x 66.5 mm MASS: 119 g
CYLINDRICAL FEATURES (holes / bores / bosses): D3.4 x10, D10 x1, D14 x1, D30.3 x1
DIMENSIONS: from the STEP model (master geometry).
This sheet: material, process, quantity, inspection.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:						FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
		NAME		SIGNATURE		DATE						TITLE: Shoulder Roll Bracket L	
DRAWN													
CHK'D													
APP'V'D													
MFG													
Q.A													
												DWG NO. A3	